


Multilayer Ceramic Chip Capacitors



FEATURES

- Designed for excellent T/VCC
- Temperature Voltage Coefficient (T/VCC) does not exceed - 25 % at rated voltage
- Excellent aging characteristics



RoHS
COMPLIANT

GENERAL SPECIFICATIONS

NOTE: Electrical characteristics at + 25 °C unless otherwise specified

Capacitance Range: 120 pF to 2.7 μF

Temperature Coefficient of Capacitance (TCC):
+ 15 %, - 25 % from - 55 °C to + 125 °C, with rated voltage applied
± 15 % from - 55 °C to + 125 °C, with 0 Vdc applied

Dissipation Factor (DF):
2.5 % maximum at 1.0 Vrms and 1 kHz

Aging Rate: 1 % maximum per decade

Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 MΩ minimum or 1000 ΩF, whichever is less.

At + 125 °C and rated voltage 10 000 MΩ minimum or 100 ΩF, whichever is less.

Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 second period and the charge/discharge current does not exceed 50 mA
≤ 100 V DC: DWV at 250 % of rated voltage

ORDERING INFORMATION								
VJ0805	X	102	K	X	A	A	T	### 2)
CASE SIZE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING 1)	MARKING	PACKAGING	PROCESS CODE
0402	X = BX	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. Example: 102 = 1000 pF	J = ± 5 % K = ± 10 % M = ± 20 %	X = Ni barrier 100 % tin plated F = AgPd	X = 25 V A = 50 V B = 100 V	A = Unmarked M= Marked NOTE: Marking is only available for 0805 and 1206 on request		
0603								
0805								
1206								
1210								
1808								
1812								
1825								
2220								
2225								
							T = 7" reel/plastic tape C = 7" reel/paper tape R = 11 1/4" reel/plastic tape P = 11 1/4" reel/paper tape O = 7" reel/flamed paper tape I = 11 1/4"/13" reel/flamed paper tape NOTE: "I" and "O" is used for "F" termination	

Note

1. DC voltage rating should not be exceeded in application
2. Process Code may be added with up to three digits, used to control non-standard products and/or special requirements




BX DIELECTRIC																														
STYLE		VJ0402		VJ0603		VJ0805			VJ1206			VJ1210 ¹⁾			VJ1808 ¹⁾			VJ1812 ¹⁾			VJ1825 ¹⁾			VJ2220 ¹⁾		VJ2225 ¹⁾				
EIA TYPE		0402		0603		0805			1206			1210			-			1812			1825			-		-				
VOLTAGE (Vdc)		25	50	25	50	25	50	100	25	50	100	25	50	100	25	50	100	25	50	100	25	50	100	25	50	100	50	100	25	50
CAP. CODE	CAP.																													
		101	100 pF		**																									
121	120 pF	**	**																											
151	150 pF	**	**																											
181	180 pF	**	**																											
221	220 pF	**	**																											
271	270 pF	**	**																											
331	330 pF	**	**																											
391	390 pF	**	**	**	**		**	**																						
471	470 pF	**	**	**	**	**	**	**																						
561	560 pF	**	**	**	**	**	**	**																						
681	680 pF	**	**	**	**	**	**	**																						
821	820 pF	**	**	**	**	**	**	**																						
102	1000 pF	**	**	**	**	**	**	**	*	*	*																			
122	1200 pF	**	**	**	**	**	**	**	*	*	*																			
152	1500 pF	**	**	**	**	**	**	**	*	*	*																			
182	1800 pF	**	**	**	**	**	**	**	*	*	*																			
222	2200 pF	**	**	**	**	**	**	**	*	*	*																			
272	2700 pF	**	**	**	**	**	**	**	*	*	*																			
332	3300 pF	**	**	**	**	**	**	**	*	*	*																			
392	3900 pF	**	**	**	**	**	**	**	*	*	*																			
472	4700 pF		**	**	**	**	**	**	*	*	*																			
562	5600 pF		**	**	**	**	**	**	*	*	*																			
682	6800 pF		**	**	**	**	**	**	*	*	*																			
822	8200 pF		**	**	**	**	**	**	*	*	*																			
103	0.010 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
123	0.012 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
153	0.015 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
183	0.018 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
223	0.022 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
273	0.027 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
333	0.033 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
393	0.039 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
473	0.047 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
563	0.056 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
683	0.068 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
823	0.082 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
104	0.10 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
124	0.12 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
154	0.15 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
184	0.18 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
224	0.22 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
274	0.27 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
334	0.33 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
394	0.39 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
474	0.47 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
564	0.56 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
684	0.68 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
824	0.82 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
105	1.0 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
125	1.2 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
155	1.5 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
185	1.8 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
225	2.2 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
275	2.7 μF	**	**	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*


Note
 1. See soldering recommendations within this data book, or visit www.vishay.com/doc?45034
 ** Available only in Paper Tape

BX DIELECTRIC - TYPICAL PARAMETERS


TEMPERATURE COEFFICIENT OF CAPACITANCE

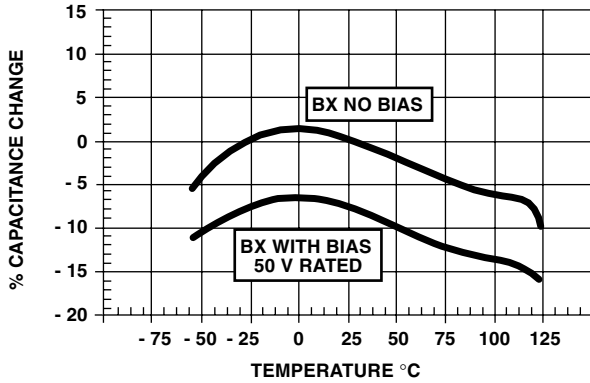


VOLTAGE COEFFICIENT OF CAPACITANCE - BX

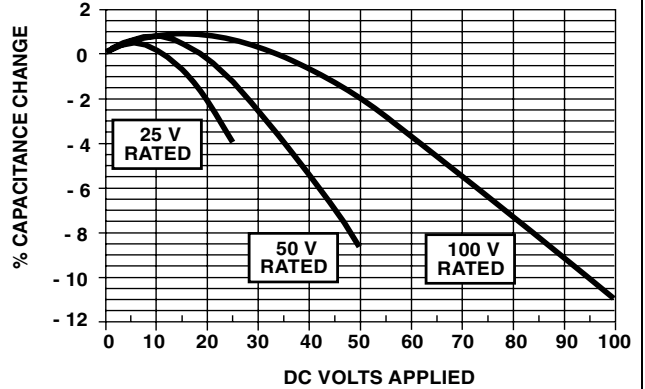


MINIMUM INSULATION RESISTANCE vs TEMPERATURE

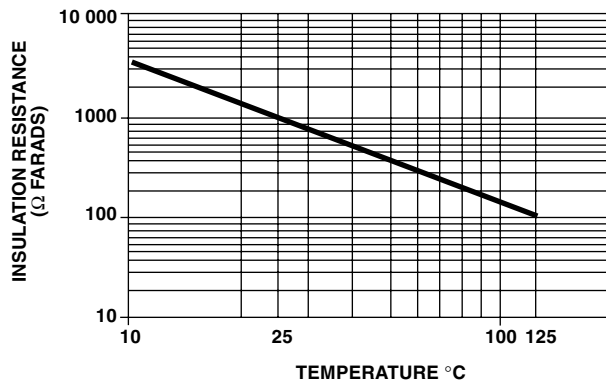

DISSIPATION FACTOR vs TEMPERATURE

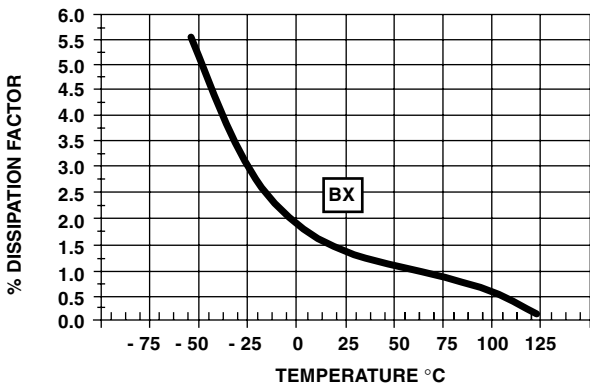

AGING RATE - BX

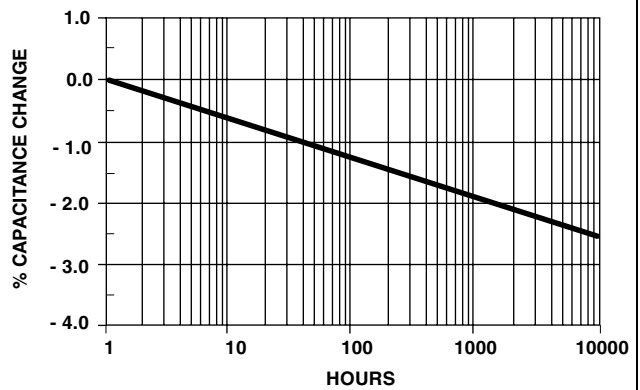



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.