




2014 **M**ultilayer Ceramic Capacitors Product catalog

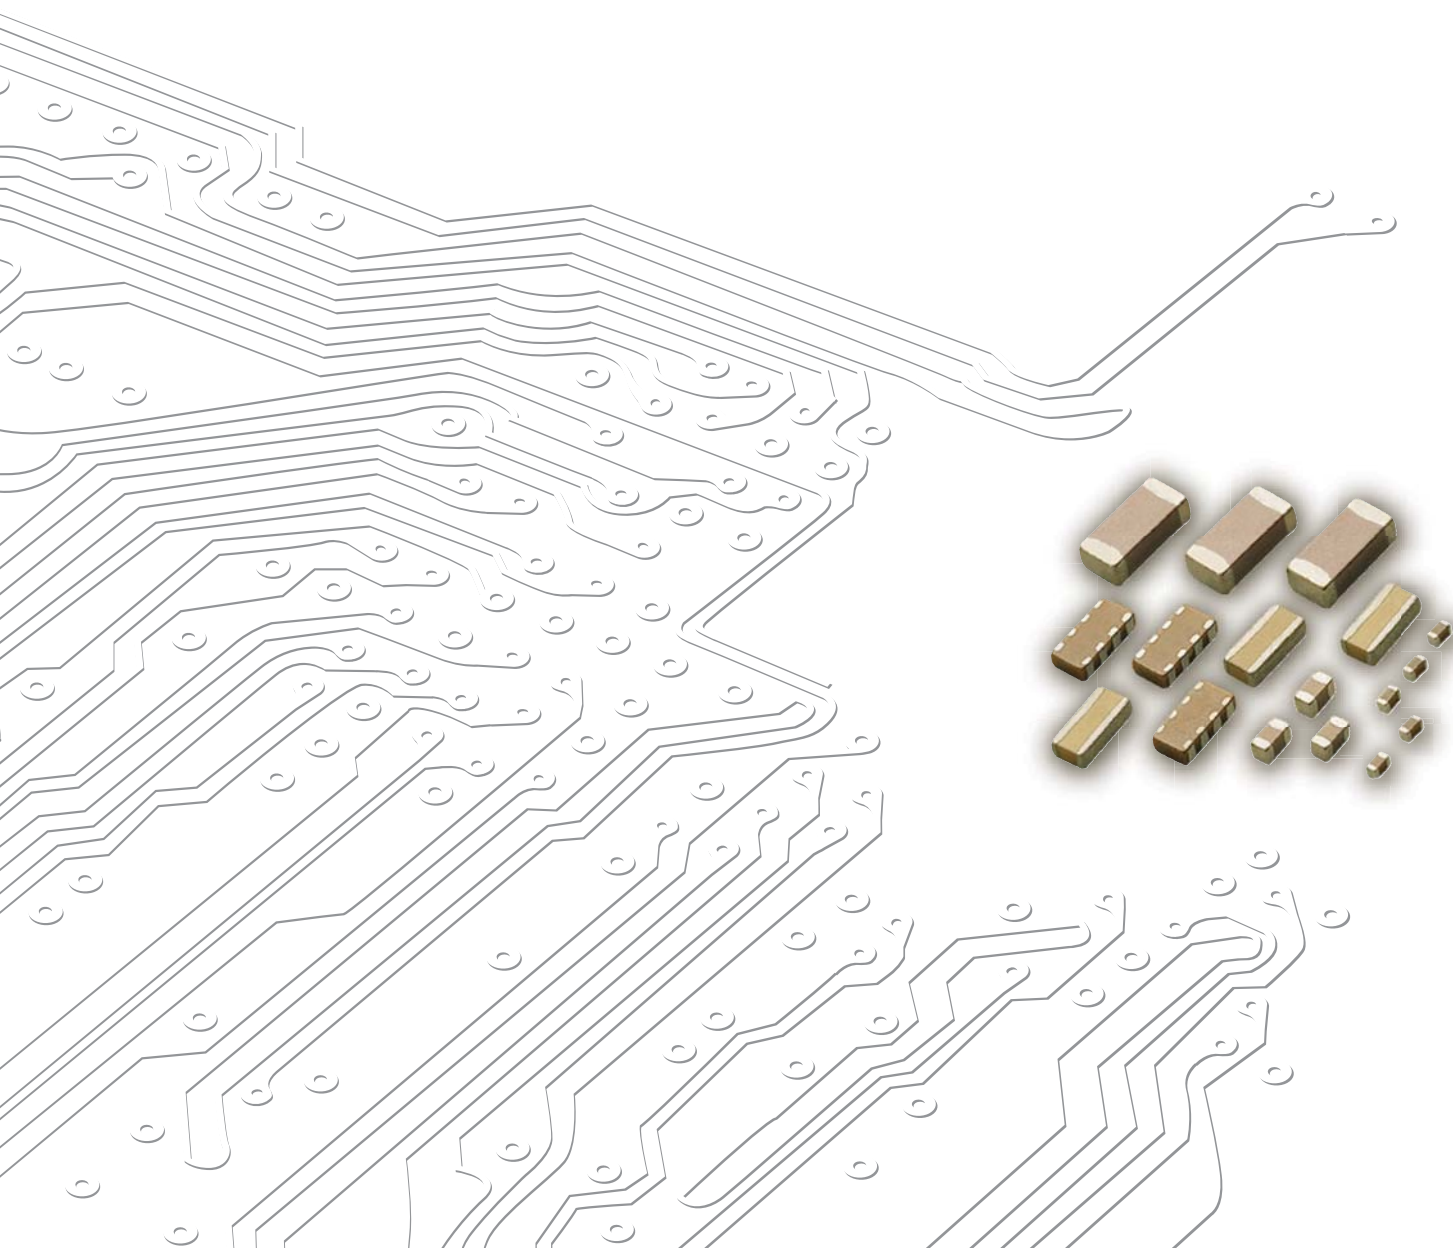


Product Portfolio



Multilayer Ceramic Capacitors (MLCC)




Chip-Resistor



Disc Capacitors



RF Device and High Frequency Inductors



Varistors and SMD-Varistors

IEC-63 Nominal Resistance / Capacitance

| | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| E1 | 100 | | | | | | | | | | | | | | | | | | | | | | | |
| E3 | 100 | | | | 220 | | | | | 470 | | | | | | | | | | | | | | |
| E6 | 100 | 150 | 220 | 330 | 470 | 680 | | | | | | | | | | | | | | | | | | |
| E12 | 100 | 120 | 150 | 180 | 220 | 270 | 330 | 390 | 470 | 560 | 680 | 820 | | | | | | | | | | | | |
| E24 | 100 | 110 | 120 | 130 | 150 | 160 | 180 | 200 | 220 | 240 | 270 | 300 | 330 | 360 | 390 | 430 | 470 | 510 | 560 | 620 | 680 | 750 | 820 | 910 |
| E96 | 100 | 102 | 121 | 124 | 147 | 150 | 178 | 182 | 215 | 221 | 261 | 267 | 316 | 324 | 383 | 392 | 464 | 475 | 562 | 576 | 681 | 698 | 825 | 845 |
| | 105 | 107 | 127 | 130 | 154 | 158 | 187 | 191 | 226 | 232 | 274 | 280 | 332 | 340 | 402 | 412 | 487 | 499 | 590 | 604 | 715 | 732 | 866 | 887 |
| | 110 | 113 | 133 | 137 | 162 | 165 | 196 | 200 | 237 | 243 | 287 | 294 | 348 | 357 | 422 | 432 | 511 | 523 | 619 | 634 | 750 | 768 | 909 | 931 |
| | 115 | 118 | 140 | 143 | 169 | 174 | 205 | 210 | 249 | 255 | 301 | 309 | 365 | 374 | 442 | 453 | 536 | 549 | 649 | 665 | 787 | 806 | 953 | 976 |

E6: $\sqrt[6]{10} \approx 1.46$ E12: $\sqrt[12]{10} \approx 1.21$

E1 series resistance: 1Ω, 10Ω, 100Ω, 1000Ω, 10000Ω, 100000Ω

INDEX

| Subject | Page |
|--|-------------|
| Quick Product Information | 1 |
| How To Order and Packaging Dimension/Quantity | 2 |
| The Outlines and External Dimensions of Capacitors | 3 |
| General Purpose Caps (6.3V~100V) | 4 |
| Ultra-small Caps (01R5 series) | 9 |
| Middle & High Voltage Caps (200V~3kV) | 10 |
| High Q & Low ESR Caps (HH series) | 13 |
| Microwave Caps (RF series) | 15 |
| Soft Termination Capacitors (SH/SG series) | 17 |
| Open-mode Design Caps (OP series) | 23 |
| Capacitor Arrays (Y4C2/Y4C3 series) | 25 |
| Low Profile Caps (TT series) | 26 |
| Low Inductance Caps (0612 series) | 27 |
| Safety Certificated Caps X1/Y2 (S2 series) | 28 |
| Safety Certificated Caps X2/Y3 (S3 series) | 29 |
| Automotive Capacitor Qualified to AEC-Q200 (MT series)..... | 30 |
| Automotive Caps Without AEC-Q200 Certification (MG series) | 31 |
| Automotive Capacitor Arrays Qualified to AEC-Q200 (MY series) | 34 |
| Appendix : Reliability Test Conditions and Requirements | 35 |
| Appendix : General Information | 38 |

*The specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

*This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ QUICK PRODUCT INFORMATION

| Series | Dielectric | Size | Capacitance | Rated voltage | Page |
|---|------------|---|---------------|--|------|
| General Purpose Caps (6.3V~100V) | NPO | 0201, 0402, 0603, 0805, 1206, 1210, 1812 | 0.3pF~0.1μF | 10V, 16V, 25V, 50V, 100V | 5 |
| | X7R | 0201, 0402, 0603, 0805, 1206, 1210, 1812 | 100pF~47μF | 6.3V, 10V, 16V, 25V, 50V, 100V | |
| | X6S | 0402, 0603, 0805, 1206,1210 | 0.47μF~100μF | 6.3V, 10V, 16V, 25V | |
| | X5R | 0201, 0402, 0603, 0805, 1206,1210 | 0.027μF~100μF | 6.3V, 10V, 16V, 25V,50V | |
| | Y5V | 0402, 0603, 0805, 1206, 1210, 1812 | 0.01μF~100μF | 6.3V, 10V, 16V, 25V, 50V, 100V | |
| Ultra-small Caps (01R5 series) | NPO | 01005 | 0.2pF~100pF | 16V | 9 |
| | X7R | 01005 | 100pF~1000pF | 10V | |
| | X5R | 01005 | 1000pF~0.1μF | 6.3V,10V | |
| Middle & High Voltage Caps (200V~3kV) | NPO | 0603, 0805, 1206, 1210, 1808, 1812 | 0.5pF~6800pF | 200V, 250V, 500V, 630V, 1kV, 2kV, 3kV | 11 |
| | X7R | 0603, 0805, 1206, 1210, 1808, 1812 | 100pF~1μF | 200V, 250V, 500V, 630V, 1kV, 2kV, 3kV | |
| | Y5V | 0805, 1206, 1210,1812 | 0.01μF~0.68μF | 200V, 250V | |
| High Q & Low ESR Caps (HH series) | NPO | 0402, 0603,0805 | 0.1pF~3300pF | 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V | 14 |
| Microwave Caps (RF series) | NPO | 0201, 0402,0603,0805 | 0.1pF~100pF | 6.3V, 10V, 25V, 50V,100V,500V | 16 |
| Soft Termination Capacitors (SH/ SG series) | NPO | 0402,0603,1206, 1210,1808 | 0.5pF~0.015μF | 10V,16V,25V,50V,100V,200V,250V,500V, 630V,1KV,3KV | 18 |
| | X7R | 0402,0603, 0805, 1206, 1210, 1808, 1812 | 100pF~10μF | 10V,16V,25V,50V,100V,200V,250V,500V, 630V, 1kV,2kV, 3kV | |
| Open-mode Design Caps (OP series) | X7R | 0805, 1206, 1210, 1812 | 100pF~1μF | 100V, 200V, 250V, 500V | 23 |
| Capacitor Arrays (Y4C2/Y4C3 series) | NPO | 0508 (4x0402), 0612 (4x0603) | 10pF~470pF | 25V, 50V,100V | 25 |
| | X7R | 0508 (4x0402), 0612 (4x0603) | 180pF~0.1μF | 10V, 16V, 25V, 50V | |
| | Y5V | 0612 (4x0603) | 0.01μF~0.1μF | 16V, 50V | |
| Low Profile Caps (TT series) | X7R | 0805, 1206 | 0.22μF~4.7μF | 10V, 16V, 25V, 50V | 26 |
| | X5R | 0603, 0805, 1206, 1210 | 0.22μF~22μF | 6.3V, 10V, 16V, 25V,50V | |
| | Y5V | 0805, 1206, 1210 | 1μF~10μF | 10V, 16V, 25V, 50V | |
| Low Inductance Caps (0612 series) | X7R | 0612 | 0.01μF~0.15μF | 50V | 27 |
| Safety Certificated Caps X1/Y2 (S2 series) | NPO | 1808, 1812, 2211 | 4pF~680pF | 250Vac | 28 |
| | X7R | 1808, 1812,2220, 2211 | 100pF~4700pF | 250Vac | |
| Safety Certificated Caps X2/Y3 (S3 series) | NPO | 1808, 1812 | 3.9pF~1000pF | 250Vac | 29 |
| | X7R | 1808, 1812 | 150pF~5600pF | 250Vac | |
| Automotive Capacitor Qualified to AEC-Q200 (MT series) | NPO | 0402, 0603, 0805, 1206, | 0.5pF~0.01μF | 10V,16V,25V,50V,100V | 30 |
| | X7R | 0402, 0603, 0805, 1206, | 100pF~1μF | 10V,16V,25V,50V,100V | |
| Automotive Caps Without AEC-Q200 Certification (MG series) | NPO | 0402, 0603, 0805, 1206, 1210, 1812 | 0.5pF~0.033μF | 10V,16V,25V,50V,100V,200V,250V | 31 |
| | X7R | 0402, 0603, 0805, 1206, 1210, 1812 | 100pF~2.2μF | 10V,16V,25V,50V,100V,200V,250V | |
| | X5R | 0402, 0603, 0805, 1206, 1210 | 0.056μF~10μF | 6.3V,10V,16V,25V | |
| Automotive Capacitor Arrays Qualified AEC-Q200 (MY Series) | NPO | 0508 (4x0402) | 10pF~220pF | 50V | 34 |
| | X7R | 0508 (4x0402) | 1000pF~0.1μF | 10V, 16V, 25V | |

HOW TO ORDER

| Type of MLCC | 0805 | | B | 104 | K | 500 | C | T | |
|---|---|----------|--|--|--|--|---|---|--|
| | Size | | Dielectric | Capacitance | Tolerance | Rated voltage | Termination | Packaging | |
| General Purpose MLCC Middle & High Voltage MLCC Ultra-small MLCC | Inch (mm) : 0201 (0603), 0603 (1608), 1206 (3216), 1808 (4520), | | N=NP0 B=X7R S=X6S X=X5R F=Y5V | Two significant digits followed by no. of zeros. And R is in place of decimal point. | A= ±0.05pF B= ±0.1pF C= ±0.25pF D= ±0.5pF F= ±1% G= ±2% J= ±5% K= ±10% M= ±20% Z= -20/+80% | Two significant digits followed by no. of zeros. And R is in place of decimal point. | L=Ag/Ni/Sn C=Cu/Ni/Sn Termination | B=Bulk C=Bulk cassette T=7" reeled Q=10" reeled G=13" reeled | |
| Low Inductance MLCC | 0612 (1632) | | | | | | | | |
| High Q / Low ESR MLCC Microwave MLCC Low Profile MLCC Open Mode MLCC Safety Certificated MLCC Low Distortion MLCC Automotive MLCC | RF | | 03 | | | | | | |
| | Series | | Size | | | | | | |
| | HH=High Q/ Low ESR RF=Microwave TT=Low profile OP=Open-mode design S2=X1/Y2 safety class S3=X2/Y3 safety class LD= Low distortion MG=Automotive Cap. without AEC-Q200 MT=Automotive Cap. with AEC-Q200 MY=Automotive Array with AEC-Q200 | | Inch : 02=01005 03=0201 15=0402 11=0505 18=0603 21=0805 12=0508 31=1206 32=1210 42=1808 43=1812 52=2211 55=2220 | | R47=0.47pF 0R5=0.5pF 1R0=1pF 100=10pF 101=100pF 102=1000pF 103=0.01uF 104=0.1uF 105=1uF 106=10uF 107=100uF | | | | |
| | SH=With Ag polymer SG=With Cu polymer | | | | | | | | |
| Soft Termination MLCC | | | | | | | C=Cu/Polymer Ni/Sn | | |
| Cap Arrays MLCC | Y | 4 C | 3 | | | | | | |
| | Type | Cap. Nr. | Termination pitch | | | | | C=Cu/Ni/Sn | |
| | Y=Capacitor array | 4C=4xCap | 3=0.03 inch 2=0.02 inch | | | | | | |


* The packaging code per each size of reel, please refer to following table "packaging style and quantity".

PACKAGING STYLE AND QUANTITY

| Size | Thickness (mm)/Symbol | | Paper tape | | Plastic tape | |
|-----------------|-----------------------|---|------------|----------|--------------|----------|
| | | | 7" reel | 13" reel | 7" reel | 13" reel |
| 01005 (0402) | 0.20±0.02 | V | 20,000 | - | - | - |
| 0201 (0603) | 0.30±0.03 | L | 15,000 | 70,000 | - | - |
| 0402 (1005) | 0.50±0.05 | N | 10,000 | 50,000 | - | - |
| | 0.50±0.02/-0.05 | Q | 10,000 | 50,000 | - | - |
| 0603 (1608) | 0.50±0.10 | H | 4,000 | - | - | - |
| | 0.80±0.07 | S | 4,000 | 15,000 | - | - |
| | 0.80±0.15/-0.10 | X | 4,000 | 15,000 | - | - |
| 0805 (2012) | 0.50±0.10 | H | 4,000 | 15,000 | - | - |
| | 0.60±0.10 | A | 4,000 | 15,000 | - | - |
| | 0.80±0.10 | B | 4,000 | 15,000 | - | - |
| | 0.85±0.10 | T | 4,000 | 15,000 | - | - |
| | 1.25±0.10 | D | - | - | 3,000 | 10,000 |
| 1206 (3216) | 1.25±0.20 | I | - | - | 3,000 | 10,000 |
| | 0.80±0.10 | B | 4,000 | 15,000 | - | - |
| | 0.85±0.10 | T | 4,000 | 15,000 | - | - |
| | 0.95±0.10 | C | - | - | 3,000 | 10,000 |
| | 1.15±0.15 | J | - | - | 3,000 | 10,000 |
| | 1.25±0.10 | D | - | - | 3,000 | 10,000 |
| | 1.60±0.20 | G | - | - | 2,000 | 10,000 |
| 1.60±0.30/-0.10 | P | - | - | 2,000 | 9,000 | |
| 1210 (3225) | 0.85±0.10 | T | - | - | 3,000 | 10,000 |
| | 0.95±0.10 | C | - | - | 3,000 | 10,000 |
| | 1.25±0.10 | D | - | - | 3,000 | 10,000 |
| | 1.60±0.20 | G | - | - | 2,000 | - |
| | 2.00±0.20 | K | - | - | 1,000 | 6,000 |
| | 2.50±0.30 | M | - | - | 1,000 | 6,000 |
| 1808 (4520) | 1.25±0.10 | D | - | - | 2,000 | 10,000 |
| | 1.10±0.15 | F | - | - | 2,000 | 10,000 |
| | 1.60±0.20 | G | - | - | 2,000 | 8,000 |
| 1812 (4532) | 2.00±0.20 | K | - | - | 1,000 | 6,000 |
| | 2.50±0.30 | M | - | - | 1,000 | 6,000 |
| | 1.25±0.10 | D | - | - | 1,000 | 5,000 |
| | 1.60±0.20 | G | - | - | 1,000 | - |
| | 2.00±0.20 | K | - | - | 1,000 | - |
| 1812 (4532) | 2.50±0.30 | M | - | - | 500 | 3,000 |
| | 2.80±0.30 | U | - | - | 500 | - |

The Outlines and External Dimensions of Capacitor

■ SINGLE CHIP CAPACITORS
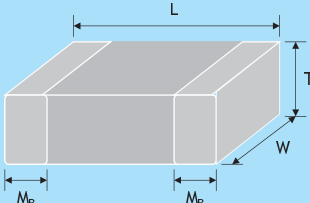
| Outline | Size Inch (mm) | L (mm) | W (mm) | T (mm)/Symbol | SolderingMethod * | M _B (mm) | |
|---|---|-------------------------|-------------------------|-------------------------|-------------------|--|--|
|  | 01005 (0402) | 0.40±0.02 | 0.20±0.02 | 0.20±0.02 | V | R | 0.10±0.03 |
| | 0201 (0603) | 0.6±0.03 | 0.3±0.03 | 0.3±0.03 | L | R | 0.15±0.05 |
| | | 0.6±0.05 ^{#2} | 0.3±0.05 ^{#2} | 0.3±0.05 ^{#2} | | | |
| | 0402 (1005) | 1.00±0.05 | 0.50±0.05 | 0.50±0.05 | N | R | 0.25±0.05/-0.10 |
| | | 1.00±0.20 | 0.50±0.20 | 0.50±0.20 | Q | R | |
| | 0603 (1608) | 1.60±0.10 | 0.80±0.10 | 0.80±0.07 | S | R / W | 0.40±0.15 |
| | | 1.60±0.15/-0.10 | 0.80±0.15/-0.10 | 0.80±0.10 | H | R / W | |
| | | | | 0.80±0.15/-0.10 | X | R / W | |
| | | 1.60±0.20 ^{#1} | 0.80±0.20 ^{#1} | 0.80±0.20 ^{#1} | | | |
| | 0805 (2012) | 2.00±0.15 | 1.25±0.10 | 0.50±0.10 | H | R / W | 0.50±0.20 |
| | | | | 0.60±0.10 | A | R / W | |
| | | | | 0.80±0.10 | B | R / W | |
| | | | | 1.25±0.10 | D | R | |
| | | 2.00±0.20 | 1.25±0.20 | 0.85±0.10 | T | R / W | |
| | | | | 1.25±0.20 | I | R | |
| | 1206 (3216) | 3.20±0.15 | 1.60±0.15 | 0.80±0.10 | B | R / W | 0.60±0.20 (0.5±0.25) ^{***} |
| | | | | 0.95±0.10 | C | R | |
| | | | | 1.25±0.10 | D | R | |
| | | 3.20±0.20 | 1.60±0.20 | 1.15±0.15 | J | R | |
| | | | | 1.60±0.20 | G | R | |
| | | 3.20+0.30/-0.10 | 1.60+0.30/-0.10 | 1.60+0.30/-0.10 | T | R / W | |
| | 1210 (3225) | 3.20±0.30 | 2.50±0.20 | 0.95±0.10 | C | R | 0.75±0.25 |
| | | | | 0.85±0.10 | T | R | |
| | | | | 1.25±0.10 | D | R | |
| 3.20±0.40 | | 2.50±0.30 | 1.60±0.20 | G | R | | |
| | | | 2.00±0.20 | K | R | | |
| 2.50±0.30 | M | R | | | | | |
| 1808 (4520) | 4.50±0.40 (4.5+0.5/-0.3) ^{**} | 2.03±0.25 | 1.25±0.10 | D | R | 0.75±0.25 (0.5±0.25) ^{***} | |
| | | | 1.40±0.15 | F | R | | |
| | | | 1.60±0.20 | G | R | | |
| | | | 2.00±0.20 | K | R | | |
| 1812 (4532) | 4.50±0.40 (4.5+0.5/-0.3) ^{**} | 3.20±0.30 | 1.25±0.10 | D | R | 0.75±0.25 (0.5±0.25) ^{***} | |
| | | | 1.60±0.20 | G | R | | |
| | | 3.20±0.40 | 2.00±0.20 | K | R | | |
| | | | 2.50±0.30 | M | R | | |
| | | | 2.80±0.30 | U | R | | |

* R = Reflow soldering process ; W = Wave soldering process.

** For 1808_200~3kV, 1812_200V~3kV and safety certificated products.


*** For 1206_1000V ~3kV, 1808_200~3kV, 1812_200~3kV and safety certificated products.

#1 : For 0603/X5R/X6S/6.3V/Cap≥10μF products.

#2 : For 0201/Cap≥0.68μF products.


Soft termination product please refer to individual sheet for detail.

■ Capacitor Arrays
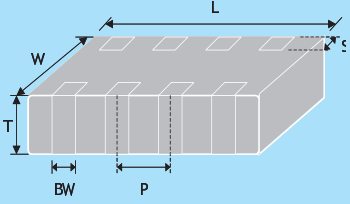
| Outline | Size Inch (mm) | L (mm) | W (mm) | T (mm)/Symbol | S (mm) | BW (mm) | P (mm) | |
|---|---------------------------|-----------|-----------|---------------|--------|-----------|-----------|-----------|
|  | 0603 x 4 (0612 (1632)) | 3.20±0.15 | 1.60±0.15 | 0.80±0.10 | B | 0.30±0.20 | 0.40±0.15 | 0.80±0.15 |
| | 0402 x 4 (0508 (1220)) | 2.00±0.15 | 1.25±0.15 | 0.85±0.10 | T | 0.20±0.10 | 0.25±0.10 | 0.50±0.10 |

Reflow soldering process only.

■ Low Inductance Capacitors / RF series
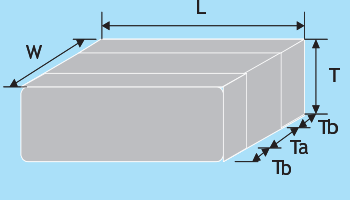
| Outline | Size Inch (mm) | L (mm) | W (mm) | T (mm)/Symbol | T _a min. (mm) | T _b min. (mm) | |
|---|----------------|-----------|-----------|---------------|--------------------------|--------------------------|------|
|  | 0612 (1632) | 3.20±0.15 | 1.60±0.15 | 0.80±0.10 | B | 0.5 | 0.13 |
| | 0508 (1220) | 2.00±0.15 | 1.25±0.15 | 0.85±0.10 | T | 0.38 | 0.13 |

Reflow soldering process only.

FEATURES

- * A wide selection of sizes is available (0402 to 1812).
- * High capacitance in given case size.
- * Capacitor with lead-free termination (pure Tin).

GENERAL ELECTRICAL DATA

| Dielectric | NPO | X7R | X6S | X5R | Y5V |
|----------------------------|---|---|-----------------------------------|-----------------------------------|---------------------------------|
| Size | 0201, 0402, 0603, 0805, 1206, 1210, 1812 | | | | |
| Capacitance range | 0.3pF to 0.1 μ F | 100pF to 47 μ F | 0.47 μ F to 100 μ F | 0.027 μ F to 100 μ F | 0.01 μ F to 100 μ F |
| Capacitance tolerance | Cap \leq 5pF: B (\pm 0.1pF), C (\pm 0.25pF) 5pF<Cap<10pF: C (\pm 0.25pF), D (\pm 0.5pF) Cap \geq 10pF: F (\pm 1%), G (\pm 2%), J (\pm 5%),K (\pm 10%) | J (\pm 5%), K (\pm 10%), M (\pm 20%) | K (\pm 10%), M (\pm 20%) | K (\pm 10%), M (\pm 20%) | M (\pm 20%), Z (-20/+80%) |
| Rated voltage (WVDC) | 10V, 16V, 25V, 50V, 100V | 6.3V, 10V, 16V, 25V, 50V, 100V | | | |
| Operating temperature | -55 to +125 $^{\circ}$ C | | -55 to +105 $^{\circ}$ C | -55 to +85 $^{\circ}$ C | -25 to +85 $^{\circ}$ C |
| Capacitance characteristic | \pm 30ppm | \pm 15% | \pm 22% | \pm 15% | +30/-80% |
| Termination | Ni/Sn (lead-free termination) | | | | |


EXPLANATION OF PART NUMBERS

| 1206 | F | 104 | Z | 500 | C | T |
|--|----------------------------|---|--------------------------------|------------------------------------|----------------------------------|--|
| Size (Inch (mm)) 1206 (3216) | Dielectric F=Y5V | Capacitance 104=10x10 ⁴ =100nF | Tolerance Z=-20/+80% | Rated voltage 500=50 VDC | Termination C=Cu/Ni/Sn | Packaging style T=7 th reeled |


Please refer to page 2 "How to order" for more information.

ELECTRICAL CHARACTERISTICS


1) Frequency characteristics

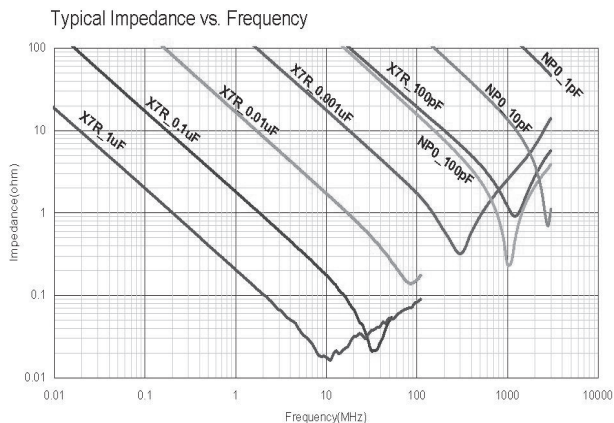


2) Capacitance Change - Typical aging rate

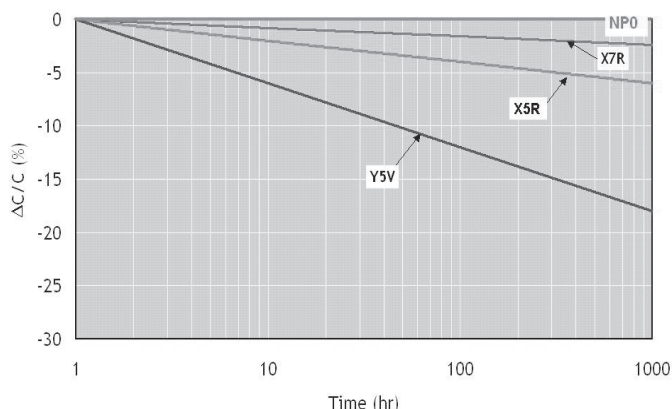

3) Temperature characteristics of capacitance (TCC)

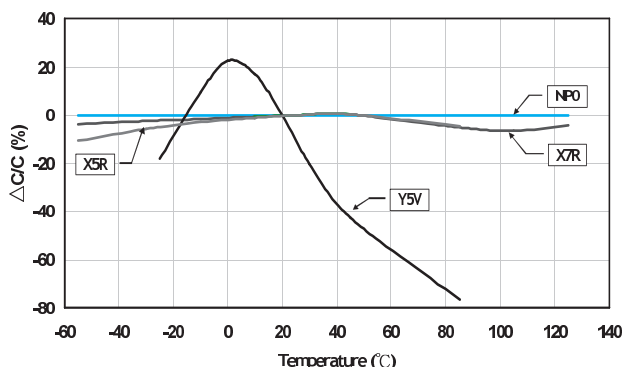

4) DC Bias characteristics

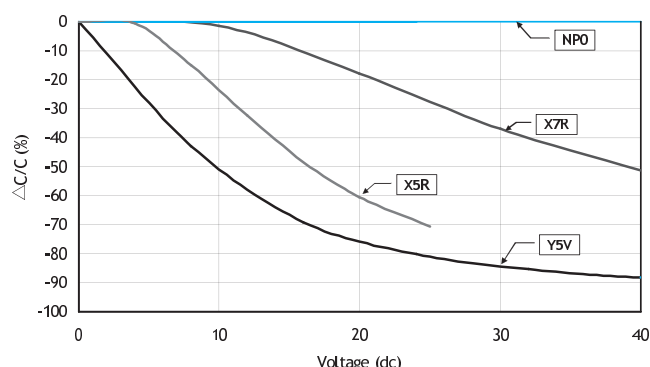

General Purpose Capacitors

6.3V~100V

■ CAPACITANCE RANGE

NP0 Dielectric

| Dielectric | | NP0 | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|-------------|----------|----|----------------------|-----|----------------------|-----|------|----|----|----|-----|------|----|----|----|-----|------|----|----|----|-----|------|----|-----|--|--|
| Size | | 0201 | | 0402 | | 0603 | | 0805 | | | | | 1206 | | | | | 1210 | | | | | 1812 | | | | |
| Rated Voltage (VDC) | | 16 25 | 50 | 10 16 25 50 | 100 | 10 16 25 50 | 100 | 10 | 16 | 25 | 50 | 100 | 10 | 16 | 25 | 50 | 100 | 10 | 16 | 25 | 50 | 100 | 16 | 50 | 100 | | |
| capacitance | 0.3pF (0R3) | L | L | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.4pF (0R4) | L | L | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.5pF (0R5) | L | L | N | N | S | S | A | A | A | | | | | | | | | | | | | | | | | |
| | 0.6pF (0R6) | L | L | N | N | S | S | A | A | A | | | | | | | | | | | | | | | | | |
| | 0.7pF (0R7) | L | L | N | N | S | S | A | A | A | | | | | | | | | | | | | | | | | |
| | 0.8pF (0R8) | L | L | N | N | S | S | A | A | A | | | | | | | | | | | | | | | | | |
| | 0.9pF (0R9) | L | L | N | N | S | S | A | A | A | | | | | | | | | | | | | | | | | |
| | 1.0pF (1R0) | L | L | N | N | S | S | A | A | A | | | | | | | | | | | | | | | | | |
| | 1.2pF (1R2) | L | L | N | N | S | S | A | A | A | B | B | B | | | | | | | | | | | | | | |
| | 1.5pF (1R5) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 1.8pF (1R8) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 2.0pF (2R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 2.2pF (2R2) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 2.7pF (2R7) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 3.0pF (3R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 3.3pF (3R3) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 3.9pF (3R9) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 4.0pF (4R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 4.7pF (4R7) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 5.0pF (5R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 5.6pF (5R6) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 6.0pF (6R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 6.8pF (6R8) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 7.0pF (7R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 8.0pF (8R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 8.2pF (8R2) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 9.0pF (9R0) | L | L | N | N | S | S | A | A | A | B | B | B | B | | | | | | | | | | | | | |
| | 10pF (100) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | | | | | | | D | D | | |
| | 12pF (120) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 15pF (150) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 18pF (180) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 22pF (220) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 27pF (270) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 33pF (330) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 39pF (390) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 47pF (470) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 56pF (560) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 68pF (680) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 82pF (820) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 100pF (101) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 120pF (121) | L | L | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 150pF (151) | | | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 180pF (181) | | | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 220pF (221) | | | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| | 270pF (271) | | | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | |
| 330pF (331) | | | N | N | S | S | A | A | A | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 390pF (391) | | | N | N | S | S | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 470pF (471) | | | N | N | S | S | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 560pF (561) | | | N | N | S | S | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 680pF (681) | | | N | N | S | S | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 820pF (821) | | | N | N | S | S | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 1,000pF (102) | | | N | N | S | S | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 1,200pF (122) | | | | | X | X | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 1,500pF (152) | | | | | X | X | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 1,800pF (182) | | | | | X | X | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 2,200pF (222) | | | | | X | X | B | B | B | B | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 2,700pF (272) | | | | | X | X | D | D | D | D | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 3,300pF (332) | | | | | X | X | D | D | D | D | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 3,900pF (392) | | | | | X | X | D | D | D | D | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 4,700pF (472) | | | | | X | X | D | D | D | D | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 5,600pF (562) | | | | | X | X | D | D | D | D | B | B | B | C | C | C | C | | | | | | D | D | | | |
| 6,800pF (682) | | | | | X | X | D | D | D | D | C | C | C | C | C | C | C | | | | | | D | D | | | |
| 8,200pF (822) | | | | | X | X | D | D | D | D | D | D | D | C | C | C | C | | | | | | D | D | | | |
| 0.010uF (103) | | | | | X | X | D | D | D | D | D | D | D | C | C | C | C | | | | | | D | D | | | |
| 0.012uF (123) | | | | | | | T | T | T | T | T | T | T | D | D | D | D | | | | | | D | D | | | |
| 0.015uF (153) | | | | | | | T | T | T | T | T | T | T | D | D | D | D | | | | | | D | D | | | |
| 0.018uF (183) | | | | | | | D | D | D | D | T | T | T | | | | | | | | | | D | D | | | |
| 0.022uF (223) | | | | | | | D | D | D | D | T | T | T | | | | | | | | | | D | D | | | |
| 0.027uF (273) | | | | | | | | | | | T | T | T | | | | | | | | | | D | D | | | |
| 0.033uF (333) | | | | | | | | | | | T | T | T | | | | | | | | | | D | D | | | |
| 0.039uF (393) | | | | | | | | | | | J | J | J | | | | | | | | | | D | D | | | |
| 0.056uF (563) | | | | | | | | | | | J | J | J | | | | | | | | | | D | D | | | |
| 0.068uF (683) | | | | | | | | | | | G | G | G | | | | | | | | | | D | D | | | |
| 0.082uF (823) | | | | | | | | | | | G | G | G | | | | | | | | | | D | D | | | |
| 0.1uF (104) | | | | | | | | | | | G | G | G | | | | | | | | | | D | D | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

General Purpose Capacitors

6.3V~100V

Y5V Dielectric (0402, 0603, 0805 Size)

| Dielectric | | Y5V | | | | | | | | | | | | | | | |
|---------------------|---------------|------|----|----|----|----|------|----|----|----|----|------|----|----|----|-----|-----|
| Size | | 0402 | | | | | 0603 | | | | | 0805 | | | | | |
| Rated Voltage (VDC) | | 6.3 | 10 | 16 | 25 | 50 | 6.3 | 10 | 16 | 25 | 50 | 6.3 | 10 | 16 | 25 | 50 | 100 |
| capacitance | 0.010uF (103) | | N | N | N | N | | S | S | S | S | | A | A | A | A | B |
| | 0.015uF (153) | | N | N | N | N | | S | S | S | S | | A | A | A | A | B |
| | 0.022uF (223) | | N | N | N | N | | S | S | S | S | | A | A | A | A | B |
| | 0.033uF (333) | | N | N | N | N | | S | S | S | S | | A | A | A | A | B |
| | 0.047uF (473) | | N | N | N | | | S | S | S | S | | A | A | A | A | B |
| | 0.068uF (683) | | N | N | N | | | S | S | S | S | | A | A | A | A | B |
| | 0.10uF (104) | | N | N | N | | | S | S | S | S | | A | A | A | A | B |
| | 0.15uF (154) | | N | N | | | | S | S | S | S | | A | A | A | A | |
| | 0.22uF (224) | N | N | N | | | S | S | S | S | S | | A | A | A | A | |
| | 0.33uF (334) | N | N | N | | | | S | S | S | X | | B | B | B | B | |
| | 0.47uF (474) | N | N | N | | | | S | S | X | X | | B | B | B | B/D | |
| | 0.68uF (684) | N | | | | | | S | X | X | | | B | B | D | D | |
| | 1.0uF (105) | N | N | | | | | S | X | X | | | B | B | D | D | |
| | 1.5uF (155) | | | | | | | S | | | | | D | D | | | |
| | 2.2uF (225) | | | | | | S | S | X | | | | D | D | I | | |
| | 3.3uF (335) | | | | | | | | | | | | D | D | | | |
| | 4.7uF (475) | | | | | | X | X | | | | | D | D | I | | |
| | 6.8uF (685) | | | | | | | | | | | | I | | | | |
| 10uF (106) | | | | | | | | | | | I | I | I | | | | |
| 22uF (226) | | | | | | | | | | | I | I | | | | | |

Y5V Dielectric (1206, 1210, 1812 Size)

| Dielectric | | Y5V | | | | | | | | | | | | | | | | | | |
|---------------------|---------------|------|----|----|----|----|-----|------|-----|----|----|----|----|------|-----|----|----|----|----|-----|
| Size | | 1206 | | | | | | 1210 | | | | | | 1812 | | | | | | |
| Rated Voltage (VDC) | | 6.3 | 10 | 16 | 25 | 35 | 50 | 100 | 6.3 | 10 | 16 | 25 | 35 | 50 | 100 | 10 | 16 | 25 | 50 | 100 |
| capacitance | 0.010uF (103) | | B | B | B | | B | B | | | | | | | C | | | | | D |
| | 0.015uF (153) | | B | B | B | | B | B | | | | | | | C | | | | | D |
| | 0.022uF (223) | | B | B | B | | B | B | | | | | | | C | | | | | D |
| | 0.033uF (333) | | B | B | B | | B | B | | | | | | | C | | | | | D |
| | 0.047uF (473) | | B | B | B | | B | B | | | | | | | C | | | | | D |
| | 0.068uF (683) | | B | B | B | | B | B | | | | | | | C | | | | | D |
| | 0.10uF (104) | | B | B | B | | B | B | | C | C | C | | C | C | D | D | D | D | D |
| | 0.15uF (154) | | B | B | B | | B | C | | C | C | C | | C | C | D | D | D | D | D |
| | 0.22uF (224) | | B | B | B | | B | C | | C | C | C | | C | C | D | D | D | D | D |
| | 0.33uF (334) | | B | B | B | | B | | | C | C | C | | C | C | D | D | D | D | D |
| | 0.47uF (474) | | B | B | B | | B | | | C | C | C | | C | | D | D | D | D | D |
| | 0.68uF (684) | | B | B | B | | B | | | C | C | C | | C | | D | D | D | D | D |
| | 1.0uF (105) | | C | C | C | | C/D | | | C | C | C | | C | | D | D | D | D | D |
| | 1.5uF (155) | | C | C | C | | | | | C | C | C | | | | D | D | D | D | |
| | 2.2uF (225) | | C | C | C | | J | | | C | C | C | | G | | D | D | D | D | |
| | 3.3uF (335) | | J | J | J | | | | | C | C | C | | | | D | D | D | D | |
| | 4.7uF (475) | | J | J | J | J | P | | | C | C | D | | G | | D | D | D | D | |
| | 6.8uF (685) | | J | J | | | | | | C | C | D | | | | D | D | D | D | |
| 10uF (106) | | J | J | P | | | | | D | D | G | K | | | D | D | D | K | | |
| 22uF (226) | | P | P | | | | | | | K | K | | | | | | | | | |
| 47uF (476) | P | | | | | | | | K | K | | | | | | M | | | | |
| 100uF (107) | | | | | | | | | M | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Ultra-small Capacitors

01R5 Series

FEATURES

- * High capacitance in unit size.
- * High precision dimensional tolerances.
- * Suitable used in high-accuracy automatic mounting machine.

GENERAL ELECTRICAL DATA

| Size | 01R5 | | |
|-------------------------|--|----------------|-----------------|
| Dielectric | NP0 | X7R | X5R |
| Capacitance* | 0.2pF to 100pF | 100pF & 1000pF | 1000pF to 0.1μF |
| Capacitance tolerance** | K (±10%), M (±20%) Cap≤10pF: C (±0.25pF) Cap>10pF: J (±5%) | | |
| Rated voltage (WVDC) | 16V | 10V | 6.3V, 10V |
| Operating temperature | -55 to +125°C | -55 to +125°C | -55 to +85°C |
| Capacitance change | ±30ppm | ±15% | |
| Termination | Ni/Sn (lead-free termination) | | |

EXPLANATION OF PART NUMBERS

| 01R5 | N | 100 | J | 160 | C | T |
|-------------------------|-------------------|------------------------------|------------------|----------------------|--------------------|------------------------|
| Size (Inch (mm)) | Dielectric | Capacitance | Tolerance | Rated voltage | Termination | Packaging style |
| 01R5 = 01005 (0402) | N=NP0(C0G) | 100=10x10 ⁰ =10pF | J=±5% | 160=16 VDC | C=Cu/Ni/Sn | T=7" reeled |

Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

| SIZE | 01R5 |
|---------------------|------|
| DIELECTRIC | NP0 |
| RATED VOLTAGE (VDC) | 16 |
| 0.2pF (0R2) | V |
| 0.3pF (0R3) | V |
| 0.4pF (0R4) | V |
| 0.5pF (0R5) | V |
| 1.0pF (1R0) | V |
| 1.5pF (1R5) | V |
| 2.0pF (2R0) | V |
| 3.0pF (3R0) | V |
| 4.0pF (4R0) | V |
| 5.0pF (5R0) | V |
| 6.0pF (6R0) | V |
| 7.0pF (7R0) | V |
| 8.0pF (8R0) | V |
| 9.0pF (9R0) | V |
| 10pF (100) | V |
| 12pF (120) | V |
| 15pF (150) | V |
| 18pF (180) | V |
| 22pF (220) | V |
| 27pF (270) | V |
| 33pF (330) | V |
| 39pF (390) | V |
| 47pF (470) | V |
| 56pF (560) | V |
| 68pF (680) | V |
| 82pF (820) | V |
| 100pF (101) | V |

| SIZE | 01R5 |
|---------------------|------|
| DIELECTRIC | X7R |
| RATED VOLTAGE (VDC) | 10 |
| 100pF (101) | V |
| 120pF (121) | V |
| 150pF (151) | V |
| 180pF (181) | V |
| 220pF (221) | V |
| 270pF (271) | V |
| 330pF (331) | V |
| 390pF (391) | V |
| 470pF (471) | V |
| 560pF (561) | V |
| 680pF (681) | V |
| 820pF (821) | V |
| 1,000pF (102) | V |

| SIZE | 01R5 | |
|---------------------|------|----|
| DIELECTRIC | X5R | |
| RATED VOLTAGE (VDC) | 6.3 | 10 |
| 1,000pF (102) | V | V |
| 1,500pF (152) | V | V |
| 2,200pF (222) | V | V |
| 3,300pF (332) | V | V |
| 4,700pF (472) | V | V |
| 6,800pF (682) | V | V |
| 0.010μF (103) | V | V |
| 0.015μF (153) | V | V |
| 0.022μF (223) | V | V |
| 0.033μF (333) | V | V |
| 0.047μF (473) | V | V |
| 0.068μF (683) | V | V |
| 0.10μF (104) | V | V |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ FEATURES

- * High voltage in a given case size.
- * High stability and reliability.

■ GENERAL ELECTRICAL DATA

| Dielectric | NPO | X7R | Y5V |
|-----------------------------|---|--------------------|------------------------|
| Size | 0603, 0805, 1206, 1210, 1808, 1812 | | 0805, 1206, 1210, 1812 |
| Capacitance | 0.5pF to 6800pF | 100pF to 1.0μF | 0.01μF to 0.68μF |
| Capacitance tolerance | Cap≤5pF: C (±0.25pF) 5pF<Cap<10pF: D (±0.5pF) Cap≥10pF: J (±5%), K (±10%) | K (±10%), M (±20%) | Z (-20/+80%) |
| Rated voltage (WVDC) | 200V to 3kV | | 200V, 250V |
| DF/ Q | Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000 | ≤2.5% | ≤5% |
| Insulation resistance at Ur | Ur=200~630V: ≥10GΩ or RxC≥100Ω-F whichever is smaller Ur=1000~3000V: ≥10GΩ | | |
| Dielectric strength | 200~300V: ≥2 x WVDC 500~999V: ≥1.5 x WVDC 1000~3000V: ≥1.2 x WVDC | | |
| Operating temperature | -55 to +125°C | | -25 to +85°C |
| Capacitance characteristic | ±30ppm | ±15% | +30/-80% |
| Termination | Ni/Sn (lead-free termination) | | |

■ EXPLANATION OF PART NUMBERS

| 1808 | N | 100 | J | 202 | C | T |
|--|---------------------------------|--|---------------------------|--------------------------------------|----------------------------------|---------------------------------------|
| Size (Inch (mm)) 1808 (4520) | Dielectric N=NP0(C0G) | Capacitance 100=10x10 ⁰ =10pF | Tolerance J=±5% | Rated voltage 202=2000 VDC | Termination C=Cu/Ni/Sn | Packaging style T=7" reeled |

Please refer to page 2 "How to order" for more information.

■ CAPACITANCE RANGE

Y5V Dielectric 200V to 250V

| DIELECTRIC | | Y5V | | | | | | | |
|---------------------|---------------|------|-----|------|-----|------|-----|------|-----|
| SIZE | | 0805 | | 1206 | | 1210 | | 1812 | |
| RATED VOLTAGE (VDC) | | 200 | 250 | 200 | 250 | 200 | 250 | 200 | 250 |
| Capacitance | 0.010μF (103) | B | B | B | B | C | C | D | D |
| | 0.015μF (153) | B | B | B | B | C | C | D | D |
| | 0.022μF (223) | B | B | B | B | C | C | D | D |
| | 0.033μF (333) | B | B | B | B | C | C | D | D |
| | 0.047μF (473) | B | B | B | B | C | C | D | D |
| | 0.068μF (683) | B | B | B | B | C | C | D | D |
| | 0.10μF (104) | | | B | B | C | C | D | D |
| | 0.15μF (154) | | | C | C | C | C | D | D |
| | 0.22μF (224) | | | | | | | D | D |
| | 0.33μF (334) | | | | | | | D | D |
| | 0.47μF (474) | | | | | | | D | D |
| | 0.68μF (684) | | | | | | | D | D |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Middle and High Voltage Capacitors 200Vto 3kV

NP0 Dielectric 200V to 3kV

| DIELECTRIC | NP0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|------|-----|------|-----|-----|-----|------|-----|-----|-----|------|------|-----|-----|-----|-----|------|------|-----|-----|------|------|------|-----|-----|-----|-----|------|------|------|
| | 0603 | | 0805 | | | | 1206 | | | | | 1210 | | | | | 1808 | | | | | 1812 | | | | | | | | |
| | 200 | 250 | 200 | 250 | 500 | 630 | 200 | 250 | 500 | 630 | 1000 | 2000 | 200 | 250 | 500 | 630 | 1000 | 2000 | 500 | 630 | 1000 | 2000 | 3000 | 200 | 250 | 500 | 630 | 1000 | 2000 | 3000 |
| RATED VOLTAGE (VDC) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.5pF (0R5) | S | A | A | A | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0pF (1R0) | S | A | A | A | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2pF (1R2) | S | A | A | A | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.5pF (1R5) | S | A | A | A | B | B | B | B | B | | | | | | | | | | | | | | | | | | | | | |
| 1.8pF (1R8) | S | A | A | A | B | B | B | B | B | | | | | | | | | | | | | | | | | | | | | |
| 2.2pF (2R2) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 2.7pF (2R7) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 3.3pF (3R3) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 3.9pF (3R9) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 4.7pF (4R7) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 5.6pF (5R6) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 6.8pF (6R8) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 8.2pF (8R2) | S | A | A | A | B | B | B | B | B | | | | | | | | | | D | D | D | | | | | | | | | |
| 10pF (100) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 12pF (120) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 15pF (150) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 18pF (180) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 22pF (220) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 27pF (270) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 33pF (330) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 39pF (390) | S | A | A | A | B | B | B | B | B | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 47pF (470) | S | A | A | A | B | B | B | C | C | C | C | C | C | C | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 56pF (560) | S | A | A | A | B | B | B | C | D | C | C | C | C | D | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 68pF (680) | S | A | A | A | B | B | B | C | D | C | C | C | C | D | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 82pF (820) | S | A | A | B | B | B | B | D | D | C | C | C | C | D | | | | D | D | D | D | D | D | D | D | D | D | D | D | |
| 100pF (101) | S | A | B | B | B | B | B | D | D | C | C | C | D | D | | | | D | D | K | D | D | D | D | D | D | D | D | D | |
| 120pF (121) | S | A | B | D | B | B | B | D | G | C | C | C | D | D | | | | D | D | K | D | D | D | D | D | D | D | D | D | |
| 150pF (151) | S | B | D | D | B | B | B | D | G | C | C | C | D | G | | | | D | K | K | D | D | D | D | D | D | D | D | D | |
| 180pF (181) | S | B | D | D | B | B | B | G | G | C | C | C | D | G | | | | D | K | K | D | D | D | D | D | D | D | D | K | |
| 220pF (221) | S | D | D | D | B | B | B | G | G | C | C | C | G | G | | | | D | K | K | D | D | D | D | D | D | D | D | K | |
| 270pF (271) | X | D | D | D | B | C | C | G | | C | C | C | G | | | | | K | K | K | D | D | D | D | D | D | K | K | | |
| 330pF (331) | X | D | D | D | B | C | C | G | | C | C | C | G | | | | | K | K | K | D | D | D | D | D | D | K | K | | |
| 390pF (391) | X | D | D | D | B | C | C | G | | C | C | C | G | | | | | K | K | | D | D | D | D | D | D | K | K | | |
| 470pF (471) | X | D | D | D | C | C | C | G | | C | C | C | G | | | | | K | K | | D | D | D | D | D | D | K | K | | |
| 560pF (561) | | D | D | D | C | D | D | | | C | C | C | | | | | | K | K | | D | D | D | D | D | D | K | K | | |
| 680pF (681) | | D | D | D | C | D | D | | | C | C | C | | | | | | K | K | | D | D | D | D | D | D | K | K | | |
| 820pF (821) | | D | D | | C | G | G | | | C | C | C | | | | | | K | | | D | D | D | D | D | D | K | K | | |
| 1,000pF (102) | | D | | | C | G | G | | | D | D | D | | | | | | K | | | D | D | D | D | D | D | K | K | | |
| 1,200pF (122) | | | | | C | G | G | | | D | D | D | | | | | | | | | D | D | D | D | D | D | K | | | |
| 1,500pF (152) | | | | | D | G | G | | | D | D | D | | | | | | | | | D | D | D | D | D | D | K | | | |
| 1,800pF (182) | | | | | D | G | G | | | D | D | D | | | | | | | | | D | D | D | D | D | D | | | | |
| 2,200pF (222) | | | | | D | G | G | | | D | D | | | | | | | | | | D | D | D | D | D | D | | | | |
| 2,700pF (272) | | | | | | | | | | D | D | | | | | | | | | | D | D | D | D | D | D | | | | |
| 3,300pF (332) | | | | | | | | | | D | D | | | | | | | | | | D | D | D | D | D | D | | | | |
| 3,900pF (392) | | | | | | | | | | D | D | | | | | | | | | | D | | | | | | | | | |
| 4,700pF (472) | | | | | | | | | | | | | | | | | | | | | D | | | | | | | | | |
| 5,600pF (562) | | | | | | | | | | | | | | | | | | | | | D | | | | | | | | | |
| 6,800pF (682) | | | | | | | | | | | | | | | | | | | | | D | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

X7R Dielectric 200V to 3kV

| DIELECTRIC | | X7R | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|---------------|------------|------------|------------|------------|------------|------|------|------------|------------|------|------|-----|-----|------|------|------|-----|-----|-----|------|------|------|------|---|--|
| SIZE | | 0603 | | | 0805 | | | 1206 | | | | 1210 | | | | 1808 | | | | | 1812 | | | | | |
| RATED VOLTAGE (VDC) | | 200 250 | 200 500 | 500 630 | 200 250 | 500 630 | 1000 | 2000 | 200 250 | 500 630 | 1000 | 2000 | 500 | 630 | 1000 | 2000 | 3000 | 200 | 250 | 500 | 630 | 1000 | 2000 | 3000 | | |
| Capacitance | 100pF (101) | X | B | B | | | | | | | | | | | | | | | | | | | | | | |
| | 120pF (121) | X | B | B | | | | | | | | | | | | | | | | | | | | | | |
| | 150pF (151) | X | B | B | D | D | D | D | | | | | | D | | D | D | | | | | | | | | |
| | 180pF (181) | X | B | B | D | D | D | D | | | | | | D | | D | D | | | | | | | | | |
| | 220pF (221) | X | B | B | D | D | D | D | | | | | D | | D | | D | D | | | | | | | | |
| | 270pF (271) | X | B | B | D | D | D | D | | | | | D | | D | | D | D | | | | | D | D | | |
| | 330pF (331) | X | B | B | D | D | D | D | | | | | D | | D | | D | K | | | | | D | D | | |
| | 390pF (391) | X | B | B | D | D | D | D | | | | | D | | D | | D | K | | | | | D | D | | |
| | 470pF (471) | X | B | B | D | D | D | D | | | | | D | | D | | D | K | | | | | D | D | | |
| | 560pF (561) | X | B | B | D | D | D | D | | | | | D | | D | | D | K | | | | | D | D | | |
| | 680pF (681) | X | B | B | D | D | D | D | | | | | D | | D | | D | K | | | | | D | D | K | |
| | 820pF (821) | X | B | B | D | D | D | D | G | | | | D | | D | | D | K | | | | | D | D | K | |
| | 1,000pF (102) | X | B | B | D | D | D | D | G | C | D | D | D | | D | | K | K | D | | D | | D | D | K | |
| | 1,200pF (122) | X | B | B | D | D | D | D | G | C | D | D | | | D | | K | | D | | D | | D | D | K | |
| | 1,500pF (152) | X | B | B | D | D | D | D | G | C | D | D | | | D | | K | | D | | D | | D | D | K | |
| | 1,800pF (182) | X | B | B | D | D | D | D | G | C | D | D | | | D | | K | | D | | D | | D | D | | |
| | 2,200pF (222) | X | B | B | D | D | D | D | G | C | D | D | | | D | | K | | D | | D | | D | D | | |
| | 2,700pF (272) | X | B | B | D | D | D | | | C | D | D | | | D | | | | D | | D | | D | D | | |
| | 3,300pF (332) | X | B | B | D | D | D | | | C | D | D | | | D | | | | D | | D | | D | K | | |
| | 3,900pF (392) | X | B | B | D | D | D | | | C | D | G | | | D | | | | D | | D | | D | K | | |
| | 4,700pF (472) | X | B | D | D | D | D | | | C | D | G | | | D | | | | D | | D | | D | K | | |
| | 5,600pF (562) | X | D | D | D | D | D | | | C | D | G | | | K | | | | D | | D | | D | | | |
| | 6,800pF (682) | X | D | D | D | D | D | | | C | D | G | | | K | | | | D | | D | | D | | | |
| | 8,200pF (822) | | D | D | D | D | D | | | C | D | G | | | K | | | | D | | D | | D | | | |
| | 0.010μF (103) | | D | D | D | D | D | | | C | D | G | | | K | | | | D | | D | | D | | | |
| | 0.012μF (123) | | D | | D | D | | | | C | D | | | | | | | | D | | D | | K | | | |
| | 0.015μF (153) | | D | | D | D | | | | C | D | | | | | | | | D | | D | | K | | | |
| | 0.018μF (183) | | D | | D | D | | | | C | D | | | | | | | | D | | D | | | | | |
| | 0.022μF (223) | | D | | D | G | | | | C | D | | | | | | | | D | | D | | | | | |
| | 0.027μF (273) | | | | D | G | | | | C | G | | | | | | | | D | | D | | | | | |
| | 0.033μF (333) | | | | D | G | | | | C | G | | | | | | | | D | | D | | | | | |
| | 0.039μF (393) | | | | D | G | | | | C | G | | | | | | | | D | | D | | | | | |
| | 0.047μF (473) | | | | D | G | | | | D | G | | | | | | | | D | | D | | | | | |
| 0.056μF (563) | | | | D | G | | | | D | G | | | | | | | | D | | K | | | | | | |
| 0.068μF (683) | | | | D | G | | | | G | G | | | | | | | | D | | K | | | | | | |
| 0.082μF (823) | | | | D | G | | | | G | | | | | | | | | D | | K | | | | | | |
| 0.10μF (104) | | | | D | G | | | | G | | | | | | | | | D | | K | | | | | | |
| 0.12μF (124) | | | | | | | | | G | | | | | | | | | D | | | | | | | | |
| 0.15μF (154) | | | | | | | | | M | | | | | | | | | K | | | | | | | | |
| 0.18μF (184) | | | | | | | | | M | | | | | | | | | K | | | | | | | | |
| 0.22μF (224) | | | | | | | | | M | | | | | | | | | K | | | | | | | | |
| 0.27μF (274) | | | | | | | | | M | | | | | | | | | K | | | | | | | | |
| 0.33μF (334) | | | | | | | | | M | | | | | | | | | K | | | | | | | | |
| 0.39μF (394) | | | | | | | | | M | | | | | | | | | K | | | | | | | | |
| 0.47μF (474) | | | | | | | | | M | | | | | | | | | K | | | | | | | | |
| 0.56μF (564) | | | | | | | | | | | | | | | | | | M | | | | | | | | |
| 0.68μF (684) | | | | | | | | | | | | | | | | | | M | | | | | | | | |
| 0.82μF (824) | | | | | | | | | | | | | | | | | | M | | | | | | | | |
| 1.00μF (105) | | | | | | | | | | | | | | | | | | M | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * High Q and low ESR performance at high frequency.
- * Quality improvement of telephone calls for low power loss and better performance.

GENERAL ELECTRICAL DATA



| Dielectric | NPO |
|-----------------------------|--|
| Size | 0402, 0603, 0805 |
| Capacitance | 0402: 0.1pF to 470pF 0603: 0.5pF to 3300pF 0805: 0.5pF to 150pF |
| Capacitance tolerance | Cap \leq 5pF: B (\pm 0.1pF), C (\pm 0.25pF) 5pF<Cap<10pF: C (\pm 0.25pF), D (\pm 0.5pF) Cap \geq 10pF: F (\pm 1%), G (\pm 2%), J (\pm 5%) |
| Rated voltage (WVDC) | 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V |
| Q | Cap<30pF: Q \geq 400+20C Cap \geq 30pF: Q \geq 1000 |
| Insulation resistance at Ur | \geq 10G Ω |
| Operating temperature | -55 to +125°C |
| Capacitance change | \pm 30ppm |
| Termination | Ni/Sn (lead-free termination) |

EXPLANATION OF PART NUMBERS

| HH | 15 | N | 100 | G | 500 | C | T |
|-------------------------------------|---|---------------------------------|--|---------------------------------|------------------------------------|----------------------------------|---------------------------------|
| Series HH=High Q/ Low ESR | Size (Inch (mm)) 15=0402 (1005) | Dielectric N=NPO(C0G) | Capacitance 100=10x10 ⁰ =10pF | Tolerance G= \pm 2% | Rated voltage 500=50 VDC | Termination C=Cu/Ni/Sn | Packaging T=7" reeled |

* Please refer to page 2 "How to order" for more information.

ELECTRICAL CHARACTERISTICS

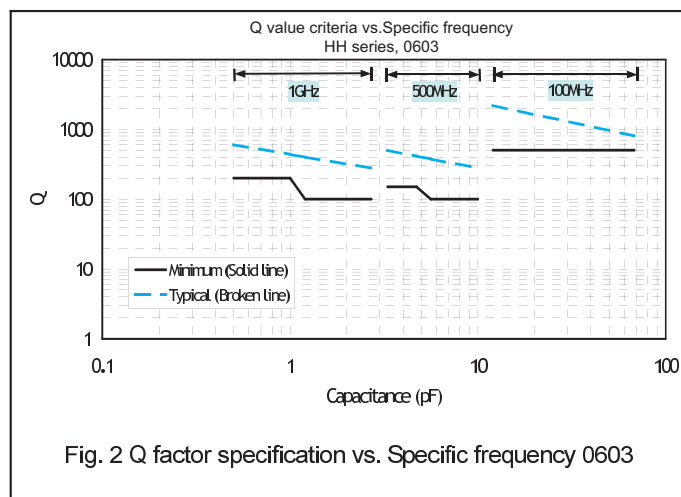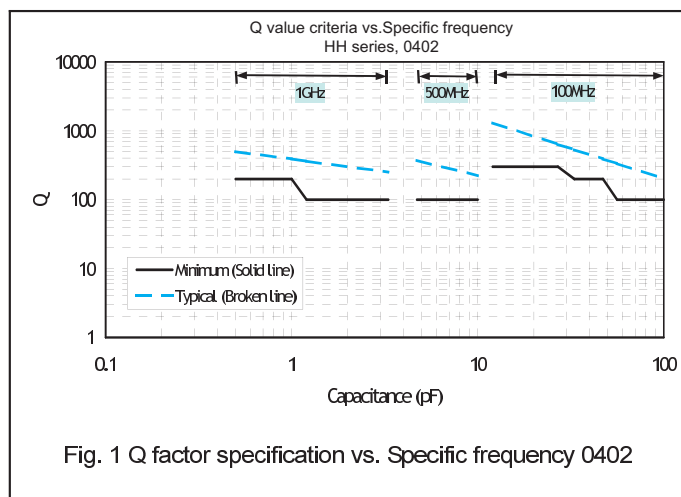

■ CAPACITANCE RANGE

| DIELECTRIC | | NPO | | | | | | | | | | |
|---------------------|-------------|------|----|----|------|----|----|-----|------|-----|---------|---------|
| SIZE | | 0402 | | | 0603 | | | | 0805 | | | |
| RATED VOLTAGE (VDC) | | 16 | 25 | 50 | 16 | 25 | 50 | 100 | 50 | 100 | 200,250 | 500,630 |
| Capacitance | 0.1pF (0R1) | N^ | N^ | N^ | | | | | | | | |
| | 0.2pF (0R2) | N^ | N^ | N^ | | | | | | | | |
| | 0.3pF (0R3) | N^ | N^ | N^ | | | | | | | | |
| | 0.4pF (0R4) | N^ | N^ | N^ | | | | | | | | |
| | 0.5pF (0R5) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | | |
| | 0.6pF (0R6) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | | |
| | 0.7pF (0R7) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | | |
| | 0.8pF (0R8) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | | |
| | 0.9pF (0R9) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | | |
| | 1.0pF (1R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 1.2pF (1R2) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 1.5pF (1R5) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 1.8pF (1R8) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 2.0pF (2R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 2.2pF (2R2) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 2.7pF (2R7) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 3.0pF (3R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 3.3pF (3R3) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 3.9pF (3R9) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 4.0pF (4R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 4.7pF (4R7) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 5.0pF (5R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 5.6pF (5R6) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 6.0pF (6R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 6.8pF (6R8) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 7.0pF (7R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 8.0pF (8R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 8.2pF (8R2) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 9.0pF (9R0) | N^ | N^ | N^ | S^ | S^ | S^ | S^ | B | B | B | B |
| | 10pF (100) | N | N | N | S | S | S | S | B | B | B | B |
| | 12pF (120) | N | N | N | S | S | S | S | B | B | B | B |
| | 15pF (150) | N | N | N | S | S | S | S | B | B | B | B |
| | 18pF (180) | N | N | N | S | S | S | S | B | B | B | B |
| 22pF (220) | N | N | N | S | S | S | S | B | B | B | B | |
| 27pF (270) | N | N | N | S | S | S | S | B | B | B | B | |
| 33pF (330) | N | N | N | S | S | S | S | B | B | B | B | |
| 39pF (390) | N | N | N | S | S | S | S | B | B | B | B | |
| 47pF (470) | N | N | N | S | S | S | S | B | B | B | B | |
| 56pF (560) | N | N | N | S | S | S | S | B | B | B | B | |
| 68pF (680) | N | N | N | S | S | S | S | B | B | B | B | |
| 82pF (820) | N | N | N | S | S | S | S | B | B | B | B | |
| 100pF (101) | N | N | N | S | S | S | S | B | B | B | B | |
| 120pF (121) | N | N | N | S | S | S | S | D | D | D | D | |
| 150pF (151) | N | N | N | S | S | S | S | D | D | D | D | |
| 180pF (181) | N | N | N | S | S | S | S | | | D | D | |
| 220pF (221) | N | N | N | S | S | S | S | | | D | D | |
| 270pF (271) | N | N | N | S | S | S | S | | | D | D | |
| 330pF (331) | N | N | N | S | S | S | S | | | D | D | |
| 390pF (391) | N | N | N | S | S | S | S | | | D | D | |
| 470pF (471) | N | N | N | S | S | S | S | | | | | |
| 560pF (561) | | | | S | S | S | S | | | | | |
| 680pF (681) | | | | S | S | S | S | | | | | |
| 820pF (821) | | | | S | S | S | S | | | | | |
| 1,000pF (102) | | | | S | S | S | S | | | | | |
| 1,200pF (122) | | | | X | X | X | | | | | | |
| 1,500pF (152) | | | | X | X | X | | | | | | |
| 1,800pF (182) | | | | X | X | X | | | | | | |
| 2,200pF (222) | | | | X | X | X | | | | | | |
| 2,700pF (272) | | | | X | X | X | | | | | | |
| 3,300pF (332) | | | | X | X | X | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * Ultra high Q and low ESR performance at high frequency.
- * Quality improvement of telephone calls for low power loss and better performance.

GENERAL ELECTRICAL DATA



| Dielectric | NPO |
|-----------------------------|---|
| Size | 0201, 0402, 0603, 0805 |
| Capacitance | 0.1pF to 100pF |
| Capacitance tolerance | Cap≤5pF: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: B (±0.1pF), C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%) |
| Rated voltage (WVDC) | 6.3V, 10V, 25V, 50V, 100V, 250V, 500V |
| Q | Cap≥30pF, Q≥1000 Cap<30pF, Q≥400+20C |
| Insulation resistance at Ur | ≥10GΩ |
| Operating temperature | -55 to +125°C |
| Capacitance change | ±30ppm/°C; 0201Cap≥22pF, ±60ppm/°C |
| Termination | Ni/Sn (lead-free termination) |

EXPLANATION OF PART NUMBERS

| RF | 15 | N | 100 | G | 500 | C | T |
|-------------------------------|---|----------------------------|--|---------------------------|------------------------------------|----------------------------------|---------------------------------|
| Series RF=Microwave | Size (Inch (mm)) 15=0402 (1005) | Dielectric N=NPO | Capacitance 100=10x10 ⁰ =10pF | Tolerance G=±2% | Rated voltage 500=50 VDC | Termination C=Cu/Ni/Sn | Packaging T=7" reeled |

* Please refer to page 2 "How to order" for more information.

ELECTRICAL CHARACTERISTICS

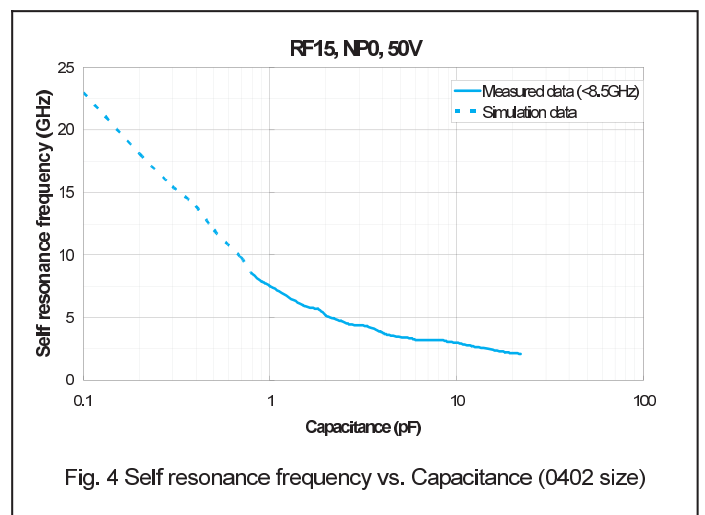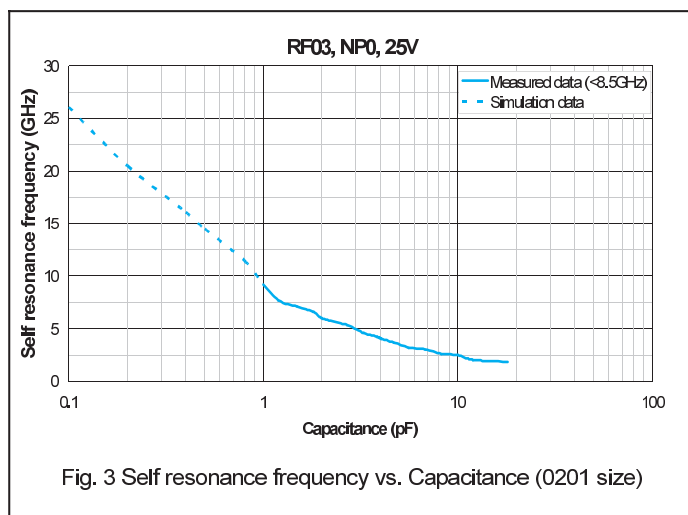

■ CAPACITANCE RANGE

| DIELECTRIC | | NPO | | | | | | | | | | | | | |
|---------------------|-------------|------|----|----|----|------|----|-----|------|-----|-----|------|-----|-----|-----|
| | | 0201 | | | | 0402 | | | 0603 | | | 0805 | | | |
| SIZE | | 6.3 | 10 | 25 | 50 | 25 | 50 | 100 | 50 | 100 | 250 | 50 | 100 | 250 | 500 |
| RATED VOLTAGE (VDC) | | 6.3 | 10 | 25 | 50 | 25 | 50 | 100 | 50 | 100 | 250 | 50 | 100 | 250 | 500 |
| Capacitance | 0.1pF (0R1) | L | L | L | L | N | N | N | | | | | | | |
| | 0.2pF (0R2) | L | L | L | L | N | N | N | | | | | | | |
| | 0.3pF (0R3) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 0.4pF (0R4) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 0.5pF (0R5) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 0.6pF (0R6) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 0.7pF (0R7) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 0.8pF (0R8) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 0.9pF (0R9) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 1.0pF (1R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 1.2pF (1R2) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 1.5pF (1R5) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 1.8pF (1R8) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 2.0pF (2R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 2.2pF (2R2) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 2.7pF (2R7) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 3.0pF (3R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 3.3pF (3R3) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 3.9pF (3R9) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 4.0pF (4R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 4.7pF (4R7) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 5.0pF (5R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 5.6pF (5R6) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 6.0pF (6R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 6.8pF (6R8) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 7.0pF (7R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 8.0pF (8R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 8.2pF (8R2) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 9.0pF (9R0) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| | 10pF (100) | L | L | L | L | N | N | N | S | S | S | T | T | T | T |
| 11pF (110) | L | L | L | L | N | N | N | S | S | S | T | T | T | T | |
| 12pF (120) | L | L | L | L | N | N | N | S | S | S | T | T | T | T | |
| 13pF (130) | L | L | L | L | N | N | N | S | S | S | T | T | T | T | |
| 15pF (150) | L | L | L | L | N | N | N | S | S | S | T | T | T | T | |
| 16pF (160) | L | L | L | L | N | N | N | S | S | S | T | T | T | T | |
| 18pF (180) | L | L | L | L | N | N | N | S | S | S | T | T | T | T | |
| 20pF (200) | L | L | L | L | N | N | N | S | S | S | T | T | T | T | |
| 22pF (220) | L | L | L | | N | N | N | S | S | S | T | T | T | T | |
| 24pF (240) | L | L | L | | N | N | N | S | S | S | T | T | T | T | |
| 27pF (270) | L | L | L | | N | N | N | S | S | S | T | T | T | T | |
| 30pF (300) | L | L | L | | N | N | N | S | S | S | T | T | T | T | |
| 33pF (330) | L | L | L | | N | N | N | S | S | S | T | T | T | T | |
| 36pF (360) | | | | | N | N | N | S | S | S | T | T | T | T | |
| 39pF (390) | | | | | N | N | N | S | S | S | T | T | T | T | |
| 43pF (430) | | | | | N | N | N | S | S | S | T | T | T | T | |
| 47pF (470) | | | | | N | N | N | S | S | S | T | T | T | T | |
| 56pF (560) | | | | | N | N | N | | | | T | T | T | T | |
| 68pF (680) | | | | | N | | | | | | T | T | T | T | |
| 82pF (820) | | | | | N | | | | | | T | T | T | | |
| 100pF (101) | | | | | N | | | | | | T | T | T | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Soft Termination Capacitors

SH/ SG Series

FEATURES

* MLCC's terminations build a soft & flexible polymer layer to withstand high bending stress in SMT line.

* Available for any item in standard series range.

GENERAL ELECTRICAL DATA

| Dielectric | NPO | X7R |
|----------------------------|--|-----------------------------|
| Size | 0603, 0805, 1206, 1210, 1808, 1812 | |
| Capacitance range | 0.5pF to 0.015pF | 100pF to 10μF |
| Capacitance tolerance | Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%) | J (±5%), K (±10%), M (±20%) |
| Rated voltage (WVDC) | 10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1000V, 2000V, 3000V | |
| Operating temperature | -55 to +125°C | |
| Capacitance characteristic | ±30ppm | ±15% |
| Termination | Ni/Sn (lead-free termination) | |

EXPLANATION OF PART NUMBERS

| SH | 31 | N | 100 | D | 501 | C | T |
|---|---|---------------------------------|--|------------------------------|------------------------------------|----------------------------------|---------------------------------|
| Series SH=With Ag polymer SG=With Cu polymer | Size (Inch (mm)) 31=1206 (3216) | Dielectric N=NPO(C0G) | Capacitance 100=10x10 ⁰ =10pF | Tolerance D=±0.5pF | Rated voltage 501=50 VDC | Termination C=Cu/Ni/Sn | Packaging T=7" reeled |

* Please refer to page 2 "How to order" for more information.

PACKAGING DIMENSION AND QUANTITY

| Size | L(mm) | W(mm) | Thickness (mm)/Symbol | | Paper tape | | Plastic tape | |
|-------------|-----------------|-----------------|-----------------------|---|------------|----------|--------------|----------|
| | | | | | 7" reel | 13" reel | 7" reel | 13" reel |
| 0603 (1608) | 1.60±0.20 | 0.80±0.10 | 0.80±0.07 | S | 4,000 | 15,000 | - | - |
| | 1.60+0.20/-0.10 | 0.80+0.15/-0.10 | 0.80+0.15/-0.10 | X | 4,000 | 15,000 | - | - |
| 0805 (2012) | 2.00±0.20 | 1.25±0.10 | 0.60±0.10 | A | 4,000 | 15,000 | - | - |
| | | | 0.80±0.10 | B | 4,000 | 15,000 | - | - |
| | 1.25±0.10 | D | - | - | 3,000 | 10,000 | - | - |
| | 2.00+0.25/-0.2 | 1.25±0.20 | 1.25±0.20 | I | - | - | 3,000 | 10,000 |
| 1206 (3216) | 3.20+0.4/-0.1 | 1.60±0.15 | 0.80±0.10 | B | 4,000 | 15,000 | - | - |
| | | | 0.95±0.10 | C | - | - | 3,000 | 10,000 |
| | | | 1.15±0.15 | J | - | - | 3,000 | 10,000 |
| | | | 1.25±0.10 | D | - | - | 3,000 | 10,000 |
| | 3.20+0.4/-0.1 | 1.60±0.20 | 1.60±0.20 | G | - | - | 2,000 | 10,000 |
| | 3.20+0.4/-0.1 | 1.60+0.30/-0.10 | 1.60+0.30/-0.10 | P | - | - | 2,000 | 9,000 |
| 1210 (3225) | 3.20±0.40 | 2.50±0.20 | 0.95±0.10 | C | - | - | 3,000 | 10,000 |
| | | | 1.25±0.10 | D | - | - | 3,000 | 10,000 |
| | 3.20±0.50 | 2.50±0.30 | 1.60±0.20 | G | - | - | 2,000 | 10,000 |
| | | | 2.00±0.20 | K | - | - | 1,000 | 6,000 |
| | | 2.50±0.30 | M | - | - | 1,000 | 6,000 | |
| 1808 (4520) | 4.50+0.60/-0.4 | 2.03±0.25 | 1.25±0.10 | D | - | - | 2,000 | - |
| | | | 2.00±0.20 | K | - | - | 1,000 | - |
| 1812 (4532) | 4.50+0.60/-0.4 | 3.20±0.30 | 1.25±0.10 | D | - | - | 1,000 | - |
| | | | 2.00±0.20 | K | - | - | 1,000 | - |
| | | 3.20±0.40 | 2.50±0.30 | M | - | - | 500 | 3,000 |

Unit: pieces

■ CAPACITANCE RANGE(SH Series) NP0 Dielectric

| DIELECTRIC | | NP0 | | | | | | | | | | | | | | | | | |
|---------------------|-------------|----------------|-----|----------------|----------|---------------------|----------|----------|-----------|------|------|---------------------|----------|----------|------|------|----------------------|------|---|
| | | 0402 | | 0603 | | 0805 | | | 1206 | | | 1210 | | | | 1808 | | | |
| SIZE | | 10, 16, 25, 50 | 100 | 10, 16, 25, 50 | 200, 250 | 10, 16, 25, 50, 100 | 200, 250 | 500, 600 | 10 to 630 | 1000 | 2000 | 10, 16, 25, 50, 100 | 200, 250 | 500, 600 | 1000 | 2000 | 500, 630, 1000, 2000 | 3000 | |
| RATED VOLTAGE (VDC) | | | | | | | | | | | | | | | | | | | |
| Capacitance | 0.5pF (0R5) | E | E | S | S | A | A | A | | | | | | | | | | | |
| | 1.0pF (1R0) | E | E | S | S | A | A | A | | | | | | | | | | | |
| | 1.2pF (1R2) | E | E | S | S | A | A | A | | | | | | | | | | | |
| | 1.5pF (1R5) | E | E | S | S | A | A | A | B | B | B | | | | | | | | |
| | 1.8pF (1R8) | E | E | S | S | A | A | A | B | B | B | | | | | | | | |
| | 2.2pF (2R2) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | |
| | 2.7pF (2R7) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | |
| | 3.3pF (3R3) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | |
| | 3.9pF (3R9) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | |
| | 4.7pF (4R7) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | |
| | 5.6pF (5R6) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | D |
| | 6.8pF (6R8) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | D |
| | 8.2pF (8R2) | E | E | S | S | A | A | A | B | B | B | | | | | | | D | D |
| | 10pF (100) | E | E | S | S | A | A | A | B | B | B | C | C | C | C | C | C | D | D |
| | 12pF (120) | E | E | S | S | A | A | A | B | B | B | C | C | C | C | C | C | D | D |
| | 15pF (150) | E | E | S | S | A | A | A | B | B | B | C | C | C | C | C | C | D | D |
| | 18pF (180) | E | E | S | S | A | A | A | B | B | B | C | C | C | C | C | C | D | D |
| | 22pF (220) | E | E | S | S | A | A | A | B | B | B | C | C | C | C | C | C | D | D |
| | 27pF (270) | E | E | S | S | A | A | A | B | B | B | C | C | C | C | C | C | D | D |
| | 33pF (330) | E | E | S | S | A | A | A | B | B | C | C | C | C | C | C | C | D | D |
| | 39pF (390) | E | E | S | S | A | A | A | B | B | C | C | C | C | C | C | C | D | D |
| | 47pF (470) | E | E | S | S | A | A | A | B | C | C | C | C | C | C | C | C | D | D |
| | 56pF (560) | E | E | S | S | A | A | A | B | C | D | C | C | C | C | C | D | D | D |
| | 68pF (680) | E | E | S | S | A | A | A | B | C | D | C | C | C | C | C | D | D | D |
| | 82pF (820) | E | E | S | S | A | A | B | B | D | D | C | C | C | C | C | D | D | D |
| | 100pF (101) | E | E | S | S | A | A | B | B | D | D | C | C | C | C | D | D | D | K |
| | 120pF (121) | E | E | S | S | A | A | D | B | D | G | C | C | C | C | D | D | | |
| | 150pF (151) | E | E | S | S | A | B | D | B | D | G | C | C | C | C | D | G | | |
| | 180pF (181) | E | E | S | S | A | B | D | B | G | G | C | C | C | C | D | G | | |
| | 220pF (221) | E | E | S | S | A | D | D | B | G | G | C | C | C | C | G | G | | |
| | 270pF (271) | E | | S | X | A | D | D | | | | C | C | C | G | | | | |
| | 330pF (331) | E | | S | X | A | D | D | | | | C | C | C | G | | | | |
| | 390pF (391) | E | | S | X | B | D | D | | | | C | C | C | G | | | | |
| | 470pF (471) | E | | S | X | B | D | | | | | C | C | C | G | | | | |
| | 560pF (561) | E | | S | | B | D | | | | | C | C | C | | | | | |
| 680pF (681) | E | | S | | B | D | | | | | C | C | C | | | | | | |
| 820pF (821) | E | | S | | B | D | | | | | C | C | C | | | | | | |
| 1,000pF (102) | E | | S | | B | D | | | | | C | D | D | | | | | | |
| 1,200pF (122) | | | | | | | | | | | C | D | D | | | | | | |
| 1,500pF (152) | | | | | | | | | | | C | D | D | | | | | | |
| 1,800pF (182) | | | | | | | | | | | C | D | D | | | | | | |
| 2,200pF (222) | | | | | | | | | | | C | D | | | | | | | |
| 2,700pF (272) | | | | | | | | | | | C | D | | | | | | | |
| 3,300pF (332) | | | | | | | | | | | C | D | | | | | | | |
| 3,900pF (392) | | | | | | | | | | | C | D | | | | | | | |
| 4,700pF (472) | | | | | | | | | | | C | | | | | | | | |
| 5,600pF (562) | | | | | | | | | | | C | | | | | | | | |
| 6,800pF (682) | | | | | | | | | | | C | | | | | | | | |
| 8,200pF (822) | | | | | | | | | | | C | | | | | | | | |
| 0.010μF (103) | | | | | | | | | | | C | | | | | | | | |
| 0.012μF (123) | | | | | | | | | | | D | | | | | | | | |
| 0.015μF (153) | | | | | | | | | | | D | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
 2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ CAPACITANCE RANGE (SH Series)

X7R Dielectric 500V To 3kV

| DIELECTRIC | | X7R | | | | | | | | | | | | | | | | |
|---------------------|---------------|------|-----|------|-----|------|------|------|-----|------|------|-----|------|------|-----|------|------|------|
| | | 0805 | | 1206 | | | | 1210 | | | 1808 | | | 1812 | | | | |
| SIZE | | 500 | 630 | 500 | 630 | 1000 | 2000 | 500 | 630 | 1000 | 500 | 630 | 2000 | 3000 | 500 | 1000 | 2000 | 3000 |
| RATED VOLTAGE (VDC) | | 500 | 630 | 500 | 630 | 1000 | 2000 | 500 | 630 | 1000 | 500 | 630 | 2000 | 3000 | 500 | 1000 | 2000 | 3000 |
| Capacitance | 100pF (101) | B | B | | | | | | | | | | | | | | | |
| | 120pF (121) | B | B | | | | | | | | | | | | | | | |
| | 150pF (151) | B | B | D | D | D | D | | | | D | D | D | | | | | |
| | 180pF (181) | B | B | D | D | D | D | | | | D | D | D | | | | | |
| | 220pF (221) | B | B | D | D | D | D | | | | D | D | D | | | | | |
| | 270pF (271) | B | B | D | D | D | D | | | | D | D | D | | D | D | | |
| | 330pF (331) | B | B | D | D | D | D | | | | D | D | K | | D | D | | |
| | 390pF (391) | B | B | D | D | D | D | | | | D | D | K | | D | D | | |
| | 470pF (471) | B | B | D | D | D | D | | | | D | D | K | | D | D | K | |
| | 560pF (561) | B | B | D | D | D | D | | | | D | D | K | | D | D | K | |
| | 680pF (681) | B | B | D | D | D | D | | | | D | D | K | | D | D | K | |
| | 820pF (821) | B | B | D | D | D | G | | | | D | D | K | | D | D | K | |
| | 1,000pF (102) | B | B | D | D | D | G | D | D | D | D | D | K | | D | D | D | K |
| | 1,200pF (122) | B | B | D | D | D | | D | D | D | D | K | | | D | D | D | |
| | 1,500pF (152) | B | B | D | D | D | | D | D | D | D | K | | | D | D | D | |
| | 1,800pF (182) | B | B | D | D | D | | D | D | D | D | K | | | D | D | D | |
| | 2,200pF (222) | B | B | D | D | D | | D | D | D | D | K | | | D | D | D | |
| | 2,700pF (272) | B | B | D | D | D | | D | D | D | D | | | | D | D | D | |
| | 3,300pF (332) | B | B | D | D | D | | D | D | D | D | | | | D | D | K | |
| | 3,900pF (392) | B | B | D | D | D | | D | D | G | D | | | | D | D | K | |
| | 4,700pF (472) | D | D | D | D | D | | D | D | G | D | | | | D | D | K | |
| | 5,600pF (562) | D | D | D | D | D | | D | D | G | K | | | | D | D | | |
| | 6,800pF (682) | D | D | D | D | D | | D | D | G | K | | | | D | D | | |
| | 8,200pF (822) | D | D | D | D | D | | D | D | G | K | | | | D | D | | |
| | 0.010μF (103) | D | D | D | D | D | | D | D | G | K | | | | D | D | | |
| | 0.012μF (123) | | | D | D | | | D | D | | | | | | D | K | | |
| | 0.015μF (153) | | | D | D | | | D | D | | | | | | D | K | | |
| | 0.018μF (183) | | | D | D | | | D | D | | | | | | D | | | |
| | 0.022μF (223) | | | G | G | | | D | D | | | | | | D | | | |
| | 0.027μF (273) | | | G | G | | | G | G | | | | | | D | | | |
| | 0.033μF (333) | | | G | G | | | G | G | | | | | | D | | | |
| | 0.039μF (393) | | | | | | | G | G | | | | | | D | | | |
| | 0.047μF (473) | | | | | | | G | G | | | | | | D | | | |
| | 0.056μF (563) | | | | | | | G | G | | | | | | K | | | |
| | 0.068μF (683) | | | | | | | | | | | | | | K | | | |
| 0.082μF (823) | | | | | | | | | | | | | | K | | | | |
| 0.10μF (104) | | | | | | | | | | | | | | K | | | | |
| 0.12μF (124) | | | | | | | | | | | | | | | | | | |
| 0.15μF (154) | | | | | | | | | | | | | | | | | | |
| 0.18μF (184) | | | | | | | | | | | | | | | | | | |
| 0.22μF (224) | | | | | | | | | | | | | | | | | | |
| 0.27μF (274) | | | | | | | | | | | | | | | | | | |
| 0.33μF (334) | | | | | | | | | | | | | | | | | | |
| 0.39μF (394) | | | | | | | | | | | | | | | | | | |
| 0.47μF (474) | | | | | | | | | | | | | | | | | | |
| 0.56μF (564) | | | | | | | | | | | | | | | | | | |
| 0.68μF (684) | | | | | | | | | | | | | | | | | | |
| 0.82μF (824) | | | | | | | | | | | | | | | | | | |
| 1.00μF (105) | | | | | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative

Soft Termination Capacitors

SH / SG Series

■ CAPACITANCE RANGE (SG Series) NP0 Dielectric

| DIELECTRIC | | NP0 | | | | | | | |
|---------------------|-------------|------|----|----|----|------|----|----|----|
| SIZE | | 0603 | | | | 0805 | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 10 | 16 | 25 | 50 |
| Capacitance | 0.1pF (0R1) | | | | | | | | |
| | 0.2pF (0R2) | | | | | | | | |
| | 0.3pF (0R3) | | | | | | | | |
| | 0.4pF (0R4) | | | | | | | | |
| | 0.5pF (0R5) | S | S | S | S | A | A | A | A |
| | 0.6pF (0R6) | S | S | S | S | A | A | A | A |
| | 0.7pF (0R7) | S | S | S | S | A | A | A | A |
| | 0.8pF (0R8) | S | S | S | S | A | A | A | A |
| | 0.9pF (0R9) | S | S | S | S | A | A | A | A |
| | 1.0pF (1R0) | S | S | S | S | A | A | A | A |
| | 1.2pF (1R2) | S | S | S | S | A | A | A | A |
| | 1.5pF (1R5) | S | S | S | S | A | A | A | A |
| | 1.8pF (1R8) | S | S | S | S | A | A | A | A |
| | 2.2pF (2R2) | S | S | S | S | A | A | A | A |
| | 2.7pF (2R7) | S | S | S | S | A | A | A | A |
| | 3.3pF (3R3) | S | S | S | S | A | A | A | A |
| | 3.9pF (3R9) | S | S | S | S | A | A | A | A |
| | 4.7pF (4R7) | S | S | S | S | A | A | A | A |
| | 5.6pF (5R6) | S | S | S | S | A | A | A | A |
| | 6.8pF (6R8) | S | S | S | S | A | A | A | A |
| | 8.2pF (8R2) | S | S | S | S | A | A | A | A |
| | 10pF (100) | S | S | S | S | A | A | A | A |
| | 12pF (120) | S | S | S | S | A | A | A | A |
| | 15pF (150) | S | S | S | S | A | A | A | A |
| | 18pF (180) | S | S | S | S | A | A | A | A |
| | 22pF (220) | S | S | S | S | A | A | A | A |
| | 27pF (270) | S | S | S | S | A | A | A | A |
| | 33pF (330) | S | S | S | S | A | A | A | A |
| | 39pF (390) | S | S | S | S | A | A | A | A |
| | 47pF (470) | S | S | S | S | A | A | A | A |
| | 56pF (560) | S | S | S | S | A | A | A | A |
| | 68pF (680) | S | S | S | S | A | A | A | A |
| | 82pF (820) | S | S | S | S | A | A | A | A |
| | 100pF (101) | S | S | S | S | A | A | A | A |
| | 120pF (121) | S | S | S | S | A | A | A | A |
| | 150pF (151) | S | S | S | S | A | A | A | A |
| | 180pF (181) | S | S | S | S | A | A | A | A |
| | 220pF (221) | S | S | S | S | A | A | A | A |
| | 270pF (271) | S | S | S | S | A | A | A | A |
| | 330pF (331) | S | S | S | S | A | A | A | A |
| | 390pF (391) | S | S | S | S | B | B | B | B |
| | 470pF (471) | S | S | S | S | B | B | B | B |
| 560pF (561) | S | S | S | S | B | B | B | B | |
| 680pF (681) | S | S | S | S | B | B | B | B | |
| 820pF (821) | S | S | S | S | B | B | B | B | |
| 1,000pF (102) | S | S | S | S | B | B | B | B | |
| 1,200pF (122) | X | X | X | X | B | B | B | B | |
| 1,500pF (152) | X | X | X | X | B | B | B | B | |
| 1,800pF (182) | X | X | X | X | B | B | B | B | |
| 2,200pF (222) | X | X | X | X | B | B | B | B | |
| 2,700pF (272) | | | | | D | D | D | D | |
| 3,300pF (332) | | | | | D | D | D | D | |
| 3,900pF (392) | | | | | D | D | D | D | |
| 4,700pF (472) | | | | | D | D | D | D | |
| 5,600pF (562) | | | | | D | D | D | D | |
| 6,800pF (682) | | | | | D | D | D | D | |
| 8,200pF (822) | | | | | D | D | D | D | |
| 0.010uF (103) | | | | | D | D | D | D | |
| 0.012uF (123) | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ CAPACITANCE RANGE (SG Series)

X7R Dielectric

| DIELECTRIC | | X7R | | | |
|---------------------|---------------|------|----|----|----|
| SIZE | | 0603 | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 |
| Capacitance | 100pF (101) | S | S | S | S |
| | 120pF (121) | S | S | S | S |
| | 150pF (151) | S | S | S | S |
| | 180pF (181) | S | S | S | S |
| | 220pF (221) | S | S | S | S |
| | 270pF (271) | S | S | S | S |
| | 330pF (331) | S | S | S | S |
| | 390pF (391) | S | S | S | S |
| | 470pF (471) | S | S | S | S |
| | 560pF (561) | S | S | S | S |
| | 680pF (681) | S | S | S | S |
| | 820pF (821) | S | S | S | S |
| | 1,000pF (102) | S | S | S | S |
| | 1,200pF (122) | S | S | S | S |
| | 1,500pF (152) | S | S | S | S |
| | 1,800pF (182) | S | S | S | S |
| | 2,200pF (222) | S | S | S | S |
| | 2,700pF (272) | S | S | S | S |
| | 3,300pF (332) | S | S | S | S |
| | 3,900pF (392) | S | S | S | S |
| | 4,700pF (472) | S | S | S | S |
| | 5,600pF (562) | S | S | S | S |
| | 6,800pF (682) | S | S | S | S |
| | 8,200pF (822) | S | S | S | S |
| | 0.010μF (103) | S | S | S | S |
| | 0.012μF (123) | S | S | S | S |
| | 0.015μF (153) | S | S | S | S |
| | 0.018μF (183) | S | S | S | S |
| | 0.022μF (223) | S | S | S | S |
| | 0.027μF (273) | S | S | S | S |
| | 0.033μF (333) | S | S | S | X |
| | 0.039μF (393) | S | S | S | X |
| | 0.047μF (473) | S | S | S | X |
| | 0.056μF (563) | S | S | S | X |
| | 0.068μF (683) | S | S | S | X |
| | 0.082μF (823) | S | S | S | X |
| | 0.10μF (104) | S | S | S | X |
| | 0.12μF (124) | | | | |
| | 0.15μF (154) | | | | |
| | 0.18μF (184) | | | | |
| 0.22μF (224) | | | | | |
| 0.27μF (274) | | | | | |
| 0.33μF (334) | | | | | |
| 0.39μF (394) | | | | | |
| 0.47μF (474) | | | | | |
| 0.56μF (564) | | | | | |
| 0.68μF (684) | | | | | |
| 0.82μF (824) | | | | | |
| 1.0μF (105) | | | | | |

Y5V Dielectric

| DIELECTRIC | | Y5V | |
|---------------------|---------------|------|----|
| SIZE | | 0603 | |
| RATED VOLTAGE (VDC) | | 10 | 16 |
| Capacitance | 0.010μF (103) | S | S |
| | 0.015μF (153) | S | S |
| | 0.022μF (223) | S | S |
| | 0.033μF (333) | S | S |
| | 0.047μF (473) | S | S |
| | 0.068μF (683) | S | S |
| | 0.10μF (104) | S | S |
| | 0.15μF (154) | S | S |
| | 0.22μF (224) | S | S |
| | 0.33μF (334) | S | S |
| | 0.47μF (474) | S | S |
| | 0.68μF (684) | S | X |
| | 1.0μF (105) | S | X |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ FEATURES

- * High voltage in a given case size.
- * Circuit open during product cracking.
- * High stability and reliability.

■ GENERAL ELECTRICAL DATA




| Dielectric | X7R |
|-----------------------------|---|
| Size | 0805, 1206, 1210, 1812 |
| Capacitance | 100pF to 1 μ F |
| Capacitance tolerance | K ($\pm 10\%$), M ($\pm 20\%$) |
| Rated voltage (WVDC) | 100V, 200V, 250V, 500V |
| DF(Tan δ) | $\leq 2.5\%$ |
| Insulation resistance at Ur | $\geq 10G\Omega$ or $RxC \geq 500\Omega \cdot F$ whichever is smaller |
| Dielectric strength | 100V: $\geq 2.5 \times WVDC$ 200V and 250V: $\geq 2 \times WVDC$ 500V: $\geq 1.5 \times WVDC$ |
| Operating temperature | -55 to +125 $^{\circ}C$ |
| Capacitance characteristic | $\pm 15\%$ |
| Termination | Ni/Sn (lead-free termination) |

■ EXPLANATION OF PART NUMBERS

| OP | 32 | B | 103 | K | 201 | C | T |
|---------------|-------------------------|-------------------|------------------------------|------------------|----------------------|--------------------|------------------|
| Series | Size (Inch (mm)) | Dielectric | Capacitance | Tolerance | Rated voltage | Termination | Packaging |
| OP=Open-mode | 32=1210 (3225) | B=X7R | 103=10x10 ³ =10nF | K= $\pm 10\%$ | 201=200 VDC | C=Cu/Ni/Sn | T=7" reeled |

* Please refer to page 2 "How to order" for more information.

■ INNER CONSTRUCTION OF OPEN-MODE DESIGN

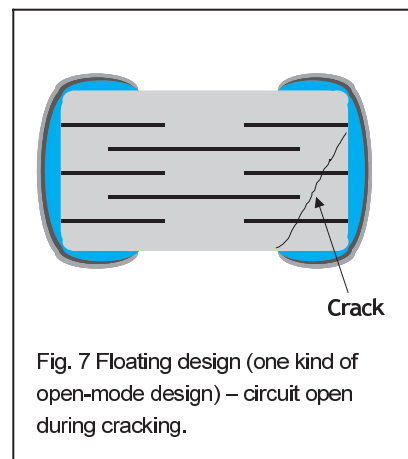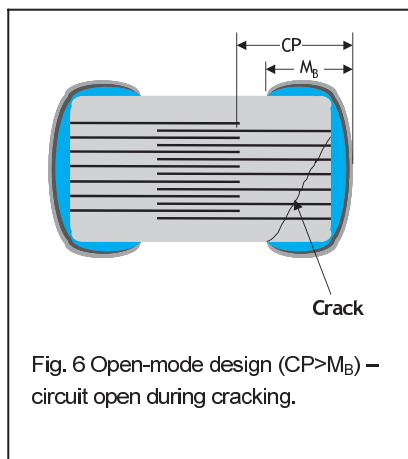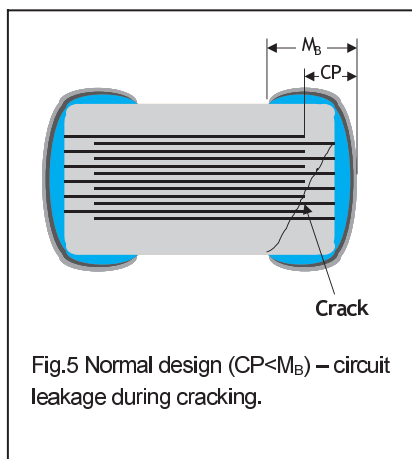

■ CAPACITANCE RANGE

| DIELECTRIC | | X7R | | | | | | | | | | | | | | | |
|---------------------|---------------|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|
| | | 0805 | | | | 1206 | | | | 1210 | | | | 1812 | | | |
| SIZE | | 100 | 200 | 250 | 500 | 100 | 200 | 250 | 500 | 100 | 200 | 250 | 500 | 100 | 200 | 250 | 500 |
| RATED VOLTAGE (VDC) | | 100 | 200 | 250 | 500 | 100 | 200 | 250 | 500 | 100 | 200 | 250 | 500 | 100 | 200 | 250 | 500 |
| Capacitance | 100pF (101) | B | B | B | B | | | | | | | | | | | | |
| | 120pF (121) | B | B | B | B | | | | | | | | | | | | |
| | 150pF (151) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 180pF (181) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 220pF (221) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 270pF (271) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 330pF (331) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 390pF (391) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 470pF (471) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 560pF (561) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 680pF (681) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 820pF (821) | B | B | B | B | B | D | D | D | | | | | | | | |
| | 1,000pF (102) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 1,200pF (122) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 1,500pF (152) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 1,800pF (182) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 2,200pF (222) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 2,700pF (272) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 3,300pF (332) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 3,900pF (392) | B | B | B | B | B | D | D | D | C | C | C | D | D | D | D | D |
| | 4,700pF (472) | B | B | B | D | B | D | D | D | C | C | C | D | D | D | D | D |
| | 5,600pF (562) | B | D | D | D | B | D | D | D | C | C | C | D | D | D | D | D |
| | 6,800pF (682) | B | D | D | D | B | D | D | D | C | C | C | D | D | D | D | D |
| | 8,200pF (822) | B | D | D | D | B | D | D | D | C | C | C | D | D | D | D | D |
| | 0.010μF (103) | B | D | D | D | B | D | D | D | C | C | C | D | D | D | D | D |
| | 0.012μF (123) | B | D | D | | B | D | D | D | C | C | C | D | D | D | D | D |
| | 0.015μF (153) | B | D | D | | B | D | D | D | C | C | C | D | D | D | D | D |
| | 0.018μF (183) | B | D | D | | B | D | D | D | C | C | C | D | D | D | D | D |
| | 0.022μF (223) | B | D | D | | B | D | D | G | C | C | C | D | D | D | D | D |
| | 0.027μF (273) | D | | | | B | D | D | G | C | C | C | D | D | D | D | D |
| | 0.033μF (333) | D | | | | B | G | G | G | C | C | C | G | D | D | D | D |
| | 0.039μF (393) | D | | | | B | G | G | | C | C | C | G | D | D | D | D |
| | 0.047μF (473) | D | | | | B | G | G | | C | D | D | G | D | D | D | D |
| 0.056μF (563) | | | | | B | G | G | | C | D | D | G | D | D | D | K | |
| 0.068μF (683) | | | | | B | G | G | | C | G | G | G | D | D | D | K | |
| 0.082μF (823) | | | | | D | G | G | | C | G | G | | D | D | D | K | |
| 0.10μF (104) | | | | | D | G | G | | C | G | G | | D | D | D | K | |
| 0.12μF (124) | | | | | D | | | | C | G | G | | D | D | D | | |
| 0.15μF (154) | | | | | G | | | | D | M | M | | D | K | K | | |
| 0.18μF (184) | | | | | G | | | | D | M | M | | D | K | K | | |
| 0.22μF (224) | | | | | G | | | | D | M | M | | D | K | K | | |
| 0.27μF (274) | | | | | | | | | G | | | | D | K | K | | |
| 0.33μF (334) | | | | | | | | | G | | | | D | K | K | | |
| 0.39μF (394) | | | | | | | | | M | | | | D | K | K | | |
| 0.47μF (474) | | | | | | | | | M | | | | K | K | K | | |
| 0.56μF (564) | | | | | | | | | M | | | | K | | | | |
| 0.68μF (684) | | | | | | | | | | | | | K | | | | |
| 0.82μF (824) | | | | | | | | | | | | | K | | | | |
| 1.0μF (105) | | | | | | | | | | | | | K | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Capacitor Array Capacitors

Y4C3/Y4C2 Series

■ FEATURES

- * High density mounting due to mounting space saving.
- * Mounting cost saving.
- * Increased throughput.

■ GENERAL ELECTRICAL DATA

| Dielectric | NP0 | | X7R | | Y5V |
|-----------------------------|---|---------------|---|----------------|----------------------------|
| Size | 4x0402 | 4x0603 | 4x0402 | 4x0603 | 4x0603 |
| Capacitance* | 10pF to 270pF | 10pF to 470pF | 1000pF to 100nF | 180pF to 100nF | 10nF to 100nF |
| Capacitance tolerance** | J (±5%), K (±10%) | | K (±10%), M (±20%) | | Z (-20/+80%) |
| Rated voltage (WVDC) | 25,50V,100V | 25, 50V,100V | 10V, 16V, 25V, 50V | 16V, 25V, 50V | 16V, 50V |
| Q/DF(Tan δ)* | Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000 | | Ur=50V, ≤2.5% Ur=25V&16V, ≤3.5% Ur=10V, ≤5.0% | | Ur=50V, ≤5% Ur=16V, ≤7% |
| Insulation resistance at Ur | ≥10GΩ | | ≥10GΩ or RxC≥500ΩxF whichever is less | | |
| Operating temperature | -55 to +125°C | | | | -25 to +85°C |
| Capacitance characteristic | ±30ppm | | ±15% | | +30/-80% |
| Termination | Ni/Sn (lead-free termination) | | | | |

■ EXPLANATION OF PART NUMBERS

| Y | 4C | 3 | B | 103 | K | 500 | C | T |
|-------------------|-----------------|--------------------------------|-------------------|------------------------------|------------------|----------------------|--------------------|------------------|
| Series | Cap. Nr. | Termination pitch | Dielectric | Capacitance | Tolerance | Rated voltage | Termination | Packaging |
| Y=Capacitor array | 4C=4xCap | 3=0.03" pitch 2=0.02" pitch | B=X7R | 103=10x10 ³ =10nF | K=±10% | 500=50 VDC | C=Cu/Ni/Sn | T=7" reeled |

* Please refer to page 2 "How to order" for more information.

■ CAPACITANCE RANGE

| SIZE | 4 x 0402 | | | | | 4 x 0603 | | | | | |
|---------------------|---------------|-----|-----|----|----|-----------|-----|----|----|-----|----|
| | DIELECTRIC | NP0 | X7R | | | NP0 | X7R | | | Y5V | |
| RATED VOLTAGE (VDC) | 25,50,100 | 10 | 16 | 25 | 50 | 25,50,100 | 16 | 25 | 50 | 16 | 50 |
| Capacitance | 10pF (100) | T | | | | B | | | | | |
| | 15pF (150) | T | | | | B | | | | | |
| | 22pF (220) | T | | | | B | | | | | |
| | 33pF (330) | T | | | | B | | | | | |
| | 47pF (470) | T | | | | B | | | | | |
| | 68pF (680) | T | | | | B | | | | | |
| | 100pF (101) | T | | | | B | | | | | |
| | 150pF (151) | T | | | | B | | | | | |
| | 180pF (181) | T | | | | B | | B | B | | |
| | 220pF (221) | T | | | | B | | B | B | | |
| | 270pF (271) | T | | | | B | | B | B | | |
| | 330pF (331) | | | | | B | | B | B | | |
| | 470pF (471) | | | | | B | | B | B | | |
| | 6,80pF (681) | | | | | | | B | B | | |
| | 1,000pF (102) | | T | T | T | T | | B | B | | |
| | 1,500pF (152) | | T | T | T | T | | B | B | | |
| | 2,200pF (222) | | T | T | T | T | | B | B | | |
| | 3,300pF (332) | | T | T | T | T | | B | B | | |
| | 4,700pF (472) | | T | T | T | T | | B | B | | |
| | 6,800pF (682) | | T | T | T | T | | B | B | | |
| 0.010μF (103) | | T | T | T | T | | B | B | | B | |
| 0.015μF (153) | | T | T | T | | | B | B | B | B | |
| 0.022μF (223) | | T | T | T | | | B | B | B | B | |
| 0.033μF (333) | | T | T | T | | | B | | | B | |
| 0.047μF (473) | | T | T | T | | | B | | | B | |
| 0.068μF (683) | | T | T | T | | | B | | | B | |
| 0.10μF (104) | | T | T | T | | | B | | B | B | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * Standard size with thin thickness.
- * Small size with high capacitance.
- * Capacitor with lead-free termination (pure Tin).

GENERAL ELECTRICAL DATA

| Dielectric | X7R | X5R | Y5V |
|-----------------------------|----------------------------------|--------------------------|--|
| Size | 0402, 0603, 0805, 1206, 1210 | | |
| Capacitance range | 0.22μF to 4.7μF | 0.22μF to 22μF | 1μF to 10μF |
| Capacitance tolerance | K (±10%), M (±20%) | | Z (-20/+80%) |
| Rated voltage (WVDC) | 6.3V, 10V, 16V, 25V | 6.3V, 10V, 16V, 25V, 50V | 10V, 16V, 25V, 50V |
| DF(Tan δ)* | 16V, 10V: ≤10.0% 6.3V: ≤15.0% | | 50V: ≤7% 25V: ≤9% 16V, 10V: ≤12.5% |
| Insulation resistance at Ur | RxC≥100ΩxF | | |
| Operating temperature | -55 to +125°C | -55 to +85°C | -25 to +85°C |
| Capacitance characteristic | ±15% | | +30/-80% |
| Termination | Ni/Sn (lead-free termination) | | |

EXPLANATION OF PART NUMBERS

| TT | 31 | X | 225 | K | 100 | C | T |
|----------------|------------------|------------|-------------------------------|-----------|---------------|-------------|-------------|
| Series | Size (Inch (mm)) | Dielectric | Capacitance | Tolerance | Rated voltage | Termination | Packaging |
| TT=Low profile | 31=1206 (3216) | X=X5R | 225=22x10 ⁵ =2.2μF | K=±10% | 100=10 VDC | C=Cu/Ni/Sn | T=7" reeled |

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

| Dielectric | X5R | | | | | | | | | | | | | | | | | |
|---------------------|--------------|--|------|----|------|-----|----|----|------|-----|----|----|------|----|----|----|----|---|
| | 0402 | | 0603 | | 0805 | | | | 1206 | | | | 1210 | | | | | |
| Size | 6.3,10 | | 25 | 10 | 16 | 6.3 | 10 | 16 | 25 | 6.3 | 10 | 16 | 25 | 50 | 10 | 16 | 25 | |
| Rated voltage (VDC) | 6.3,10 | | 25 | 10 | 16 | 6.3 | 10 | 16 | 25 | 6.3 | 10 | 16 | 25 | 50 | 10 | 16 | 25 | |
| Capacitance | 0.22μF (224) | | L | H | H | | | | | | | | | | | | | |
| | 0.47μF (474) | | L | | | | | | | | | | | | | | | |
| | 1.0μF (105) | | L | | H | H | | T | T | T | | T | T | T | | | | |
| | 1.5μF (155) | | | | | | | T | T | | | T | T | T | | | | |
| | 2.2μF (225) | | | | | | T | T | T | T | | T | T | T | T | | | |
| | 3.3μF (335) | | | | | | | | | | | T | T | T | | T | | |
| | 4.7μF (475) | | | | H | | T | T | T | T | | T | T | T | | T | | |
| | 6.8μF (685) | | | | | | | | | | | | | | | | | |
| | 10μF (106) | | | | | | T | T | | | J | T | T | T | | T | | T |
| | 22μF (226) | | | | | | T | | | | T | | | | | | T | |
| 47μF (476) | | | | | | | | | | T | | | | | | | | |

| Dielectric | X7R | | | | | | Y5V | | | | | | | | |
|---------------------|-------------|--------|----|------|----|----|------|----|----|----|------|----|----|----|------|
| | 0805 | | | 1206 | | | 0805 | | | | 1206 | | | | 1210 |
| Size | 10 | 16, 25 | 10 | 25 | 50 | 10 | 16 | 25 | 50 | 10 | 16 | 25 | 50 | 10 | |
| Rated voltage (VDC) | 10 | 16, 25 | 10 | 25 | 50 | 10 | 16 | 25 | 50 | 10 | 16 | 25 | 50 | 10 | |
| Capacitance | 1.0μF (105) | | | | T | | | | | T | | | | | |
| | 1.5μF (155) | | | | | | | | | | | | | | |
| | 2.2μF (225) | | | T | | T | | T | | | T | T | T | T | |
| | 3.3μF (335) | | | | | | T | | | | | | | | |
| | 4.7μF (475) | | T | | | T | | T | | | T | T | | | |
| | 6.8μF (685) | | | | | | | | | | T | | | | |
| | 10μF (106) | | | | T | | | T | | | T | | | | T |
| 22μF (226) | | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Low Inductance Capacitors

0612 Series

■ FEATURES

- * Standard size with thin thickness.
- * Small size with high capacitance.
- * Capacitor with lead-free termination (pure Tin).
- * MLCC with low ESL performance.

■ GENERAL ELECTRICAL DATA

| Dielectric | X7R |
|-----------------------------|---|
| Size | 0612 |
| Capacitance range | 10nF to 150nF |
| Capacitance tolerance | K ($\pm 10\%$), M ($\pm 20\%$) |
| Rated voltage (WVDC) | 50V |
| DF(Tan δ)* | $\leq 2.5\%$ |
| Insulation resistance at Ur | $\geq 10G\Omega$ or $RxC \geq 500\Omega \times F$ whichever is less |
| Operating temperature | -55 to +125°C |
| Capacitance characteristic | $\pm 15\%$ |
| Termination | Ni/Sn (lead-free termination) |
| ESL | 500pH |

■ EXPLANATION OF PART NUMBERS

| 0612 | B | 103 | K | 500 | C | T |
|-------------------------|-------------------|------------------------------|------------------|----------------------|--------------------|------------------|
| Size (Inch (mm)) | Dielectric | Capacitance | Tolerance | Rated voltage | Termination | Packaging |
| 0612(1632) | B=X7R | 103=10x10 ³ =10nF | K= $\pm 10\%$ | 500=50 VDC | C=Cu/Ni/Sn | T=7" reeled |

* Please refer to page 2 "How to order" for more information.

■ CAPACITANCE RANGE

| DIELECTRIC | | X7R |
|---------------------|-------------|------|
| SIZE | | 0612 |
| RATED VOLTAGE (VDC) | | 50 |
| Capacitance | 10nF (103) | B |
| | 12nF (123) | B |
| | 15nF (153) | B |
| | 18nF (183) | B |
| | 22nF (223) | B |
| | 27nF (273) | B |
| | 33nF (333) | B |
| | 39nF (393) | B |
| | 47nF (473) | B |
| | 56nF (563) | B |
| | 68nF (683) | B |
| | 82nF (823) | B |
| | 100nF (104) | B |
| | 120nF (124) | B |
| 150nF (154) | B | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Safety Certificated Capacitors X1/Y2 S2 Series

FEATURES

- * High voltage in a given case size.
- * High stability and reliability.
- * RoHS compliant.



GENERAL ELECTRICAL DATA

| Dielectric | NPO | X7R |
|----------------------------------|---|------------------------|
| Size | 1808, 1812, 2211 | 1808, 1812, 2220, 2211 |
| Capacitance | 4pF to 680pF | 100pF to 4700pF |
| Capacitance tolerance | J (±5%), K (±10%) | |
| Rated voltage (WVAC) | 250Vrms | |
| Q/ DF (Tan δ) | Cap<30pF: Q≥400+20C | DF≤2.5% |
| Insulation resistance at Ur | ≥10GΩ | |
| Dielectric withstanding strength | 1500VAC | |
| Peak impulse voltage | 5000V | |
| Operating temperature | -55 to +125°C | |
| Capacitance characteristic | ±60ppm | ±15% |
| Termination | Ni/Sn (lead-free termination) | |
| Certified number | TUV: R500021351, R50118359, R50195920, UL: E250427, E182369 | |
| Test standard | EN 60384-14:2005, IEC 60384-14:2005, EN 60384-14:2005, UL 60950:2000, UL 60384-14 | |

EXPLANATION OF PART NUMBERS

| S2 | 42 | N | 100 | J | 302 | L | I |
|--------------------|------------------------------------|---------------------|---|--------------------|---|---|--------------------------|
| Series S2=X1/Y2 | Size (Inch (mm)) 42=1808 (4520) | Dielectric N=NPO | Capacitance 100=10x10 ⁰ =10pF | Tolerance J=±5% | Rated voltage 302=3000 VDC 602=6000 Impulse Voltage | Termination L=Ag/Ni/Sn C=Cu/Ni/Sn | Packaging T=7" reeled |

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

| DIELECTRIC | NPO | | | | |
|----------------------|---------------------|------|------|------|----|
| | SIZE | 1808 | 1812 | 2211 | |
| | RATED VOLTAGE (VDC) | 3000 | 3000 | 3000 | |
| PEAK IMPULSE VOLTAGE | 5000 | 5000 | 5000 | 6000 | |
| Capacitance | 4pF (4R0) | F | | K | K* |
| | 5pF (5R0) | F | | K | K* |
| | 10pF (100) | F | D | K | K* |
| | 12pF (120) | F | D | K | K* |
| | 15pF (150) | F | D | K | K* |
| | 18pF (180) | F | D | K | K* |
| | 22pF (220) | F | D | K | K* |
| | 27pF (270) | F | D | K | K* |
| | 33pF (330) | F | D | K | K* |
| | 39pF (390) | G | D | K | K* |
| | 47pF (470) | G | D | K | K* |
| | 56pF (560) | G | D | K | K* |
| | 68pF (680) | G | D | K | M* |
| | 82pF (820) | G | D | K | M* |
| | 100pF (101) | K | D | K | U* |
| | 120pF (121) | K | D | M | |
| | 150pF (151) | K | D | M | |
| | 180pF (181) | | D | M | |
| | 220pF (221) | | K | M | |
| | 270pF (271) | | K | M | |
| 330pF (331) | | K | M | | |
| 390pF (391) | | K | M | | |
| 470pF (471) | | K | M | | |
| 560pF (561) | | | M | | |
| 680pF (681) | | | M | | |

| DIELECTRIC | X7R | | | | |
|----------------------|---------------------|------|------|------|------|
| | SIZE | 1808 | 1812 | 2211 | 2220 |
| | RATED VOLTAGE (VDC) | 3000 | | | |
| PEAK IMPULSE VOLTAGE | 5000 | | | | |
| Capacitance | 56pF (560) | | | | |
| | 68pF (680) | | | | |
| | 82pF (820) | | | | |
| | 100pF (101) | G | | | |
| | 120pF (121) | G | | | |
| | 150pF (151) | G | G | G | |
| | 180pF (181) | G | G | G | K |
| | 220pF (221) | G | G | G | K |
| | 270pF (271) | K | G | G | K |
| | 330pF (331) | K | G | G | K |
| | 390pF (391) | K | G | G | K |
| | 470pF (471) | K | G | K | K |
| | 560pF (561) | K | G | K | K |
| | 680pF (681) | K | K | K | K |
| | 820pF (821) | K | K | K | K |
| | 1,000pF (102) | K | M | M | K |
| | 1,200pF (122) | | | M | M |
| | 1,500pF (152) | | | M | M |
| | 1,800pF (182) | | | M | M |
| | 2,200pF (222) | | | M | M |
| 3,300pF (332) | | | | M | |
| 4,700pF (472) | | | | M | |

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "*" mark is expressed product with Cu/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

PACKAGING DIMENSION AND QUANTITY (X1/Y2 & X2/Y3 Series)

| Size Inch (mm) | L (mm) | W (mm) | MB min(mm) | T (mm)/Symbol | 7" Plastic tape | |
|----------------|---------------|-----------|------------|---------------|-----------------|-------|
| 1808 (4520) | 4.50±0.5/-0.3 | 2.03±0.25 | 0.26 | 1.40±0.15 | F | 2,000 |
| | | | | 1.60±0.20 | G | 1,000 |
| | | | | 2.00±0.20 | K | 1,000 |
| 1812 (4532) | 4.50±0.5/-0.3 | 3.20±0.30 | 0.26 | 1.60±0.20 | G | 1,000 |
| | | | | 2.00±0.20 | K | 1,000 |
| | | | | 2.50±0.30 | M | 500 |
| 2220 (5750) | 5.70±0.40 | 5.00±0.40 | 0.30 | 2.00±0.20 | K | 1,000 |
| | | | | 2.50±0.30 | M | 500 |
| | | | | 1.60±0.20 | G | 1,000 |
| 2211 (5728) | 5.70±0.40 | 2.80±0.30 | 0.30 | 2.00±0.20 | K | 1,000 |
| | | | | 2.50±0.30 | M | 500 |

Safety Certificated Capacitors X2/Y3 S3 Series

FEATURES

- * High voltage in a given case size.
- * High stability and reliability.
- * RoHS compliant.



GENERAL ELECTRICAL DATA

| Dielectric | NPO | X7R |
|----------------------------------|---|--------------------|
| Size | 1808, 1812 | |
| Capacitance* | 3.9pF to 1000pF | 150pF to 5600pF |
| Capacitance tolerance | J (±5%), K (±10%) | K (±10%), M (±20%) |
| Rated voltage (WVDC) | 2000V, 3000V | |
| Rated voltage (WVAC) | 250Vrms | |
| Q/ DF (Tan δ) | Cap<30pF: Q≥400+20C | Tan δ≤2.5% |
| Insulation resistance at Ur | ≥10GΩ | |
| Dielectric withstanding strength | 1500VAC | |
| Peak impulse voltage (X2) | 2500V | |
| Operating temperature | -55 to +125°C | |
| Capacitance characteristic | ±60ppm | ±15% |
| Termination | Ni/Sn (lead-free termination) | |
| Certified number | TUV: R500021351, R50118359, R50195920, UL: E250427, E182369 | |
| Test standard | EN 60384-14:2005, IEC 60384-14:2005, UL 60950:2000, UL 60384-14 | |

EXPLANATION OF PART NUMBERS

| S3 | 42 | N | 100 | J | 202 | L | I |
|----------|------------------|------------|------------------------------|-----------|---------------|-------------|-------------|
| Series | Size (Inch (mm)) | Dielectric | Capacitance | Tolerance | Rated voltage | Termination | Packaging |
| S3=X2/Y3 | 42=1808 (4520) | N=NP0 | 100=10x10 ⁰ =10pF | J=±5% | 202=2000 VDC | L=Ag/Ni/Sn | T=7" reeled |

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

| DIELECTRIC | NPO | | |
|---------------------|------|------|------|
| | SIZE | | |
| | 1808 | 1812 | 3000 |
| RATED VOLTAGE (VDC) | 2000 | 3000 | 3000 |
| 3.9pF (3R9) | | F | |
| 4.7pF (4R7) | | F | |
| 5.0pF (5R0) | | F | |
| 5.6pF (5R6) | | F | |
| 6.8pF (6R8) | | F | |
| 8.2pF (8R2) | | F | |
| 10pF (100) | F | F | D |
| 12pF (120) | F | F | D |
| 15pF (150) | F | F | D |
| 18pF (180) | F | F | D |
| 22pF (220) | F | F | D |
| 27pF (270) | F | F | D |
| 33pF (330) | F | F | D |
| 39pF (390) | G | G | D |
| 47pF (470) | G | G | D |
| 56pF (560) | G | G | D |
| 68pF (680) | G | G | D |
| 82pF (820) | G | G | D |
| 100pF (101) | K | K | D |
| 120pF (121) | K | K | D |
| 150pF (151) | K | K | D |
| 180pF (181) | K | K | D |
| 220pF (221) | K | K | D |
| 270pF (271) | K | K | D |
| 330pF (331) | K | | D |
| 390pF (391) | K | | D |
| 470pF (471) | K | | D |
| 560pF (561) | K | | D |
| 680pF (681) | K | | K |
| 820pF (821) | K | | K |
| 1,000pF (102) | K | | K |

| DIELECTRIC | X7R | | | |
|---------------------|------|------|------|------|
| | SIZE | | | |
| | 1808 | 3000 | 2000 | 3000 |
| RATED VOLTAGE (VDC) | 2000 | 3000 | 2000 | 3000 |
| 150pF (151) | G | | | |
| 180pF (181) | G | | | |
| 220pF (221) | G | | | |
| 270pF (271) | G | | G | |
| 330pF (331) | G | G | G | |
| 390pF (391) | G | G | G | |
| 470pF (471) | G | G | G | |
| 560pF (561) | G | G | G | |
| 680pF (681) | G | G | G | G |
| 820pF (821) | G | G | G | G |
| 1,000pF (102) | K | K | G | G |
| 1,200pF (122) | K | | G | |
| 1,500pF (152) | K | | K | |
| 1,800pF (182) | K | | K | |
| 2,200pF (222) | K | | M | |
| 2,700pF (272) | | | M | |
| 3,300pF (332) | | | M | |
| 3,900pF (392) | | | M | |
| 4,700pF (472) | | | M | |
| 5,600pF (562) | | | M | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors Qualified to AEC-Q200 MT Series



■ GENERAL ELECTRICAL DATA

| Dielectric | NPO | X7R |
|----------------------------|--|-----------------------------|
| Size | 0402, 0603, 0805, 1206 | |
| Capacitance range | 0.5pF to 0.01uF | 100pF to 1uF |
| Capacitance tolerance | Caps≤5pF:B,C; 5pF<Cap<10pF:C,D; Cap≥10pF:F, G, J | J (±5%), K (±10%), M (±20%) |
| Rated voltage (WVDC) | 10V, 16V, 25V, 50V, 100V | 10V, 16V, 25V, 50V, 100V |
| Operating temperature | -55 to +125°C | |
| Capacitance characteristic | ±30ppm/°C | ±15% |
| Termination | Ni/Sn (lead-free termination) | |

■ EXPLANATION OF PART NUMBERS

| MT | 31 | B | 104 | K | 500 | C | I |
|---|---|----------------------------|---|----------------------------|------------------------------------|----------------------------------|---------------------------------|
| Series MT= Automotive (with AEC-Q200 qualification) | Size (Inch (mm)) 31=1206 (3216) | Dielectric B=X7R | Capacitance 104=10x10 ⁴ =0.1uF | Tolerance K=±10% | Rated voltage 500=50 VDC | Termination C=Cu/Ni/Sn | Packaging T=7" reeled |

■ CAPACITANCE RANGE

NPO Dielectric

| DIELECTRIC | Size | NPO | | | | | | | | |
|---------------------|-------------|-----------------|-----|-------------|-----|-------------|-----|------|--|--|
| | | 0402 | | 0603 | | 0805 | | 1206 | | |
| RATED VOLTAGE (VDC) | 10,16,25,50 | 10,16,25,50,100 | 200 | 10,16,25,50 | 100 | 10,16,25,50 | 100 | | | |
| Capacitance | 0.5pF (0R5) | N | S | S | A | A | | | | |
| | 0.6pF (0R6) | N | S | S | A | A | | | | |
| | 0.7pF (0R7) | N | S | S | A | A | | | | |
| | 0.8pF (0R8) | N | S | S | A | A | | | | |
| | 0.9pF (0R9) | N | S | S | A | A | | | | |
| | 1.0pF (1R0) | N | S | S | A | A | | | | |
| | 1.2pF (1R2) | N | S | S | A | A | | | | |
| | 1.5pF (1R5) | N | S | S | A | A | B | B | | |
| | 1.8pF (1R8) | N | S | S | A | A | B | B | | |
| | 2.2pF (2R2) | N | S | S | A | A | B | B | | |
| | 2.7pF (2R7) | N | S | S | A | A | B | B | | |
| | 3.3pF (3R3) | N | S | S | A | A | B | B | | |
| | 3.9pF (3R9) | N | S | S | A | A | B | B | | |
| | 4.7pF (4R7) | N | S | S | A | A | B | B | | |
| | 5.6pF (5R6) | N | S | S | A | A | B | B | | |
| | 6.8pF (6R8) | N | S | S | A | A | B | B | | |
| | 8.2pF (8R2) | N | S | S | A | A | B | B | | |
| | 10pF (100) | N | S | S | A | A | B | B | | |
| | 12pF (120) | N | S | S | A | A | B | B | | |
| | 15pF (150) | N | S | S | A | A | B | B | | |
| | 18pF (180) | N | S | S | A | A | B | B | | |
| | 22pF (220) | N | S | S | A | A | B | B | | |
| | 27pF (270) | N | S | S | A | A | B | B | | |
| | 33pF (330) | N | S | S | A | A | B | B | | |
| | 39pF (390) | N | S | S | A | A | B | B | | |
| | 47pF (470) | N | S | S | A | A | B | B | | |
| | 56pF (560) | N | S | S | A | A | B | B | | |
| | 68pF (680) | N | S | S | A | A | B | B | | |
| | 82pF (820) | N | S | S | A | A | B | B | | |
| | 100pF (101) | N | S | S | A | A | B | B | | |
| | 120pF (121) | N | S | | A | A | B | B | | |
| | 150pF (151) | N | S | | A | A | B | B | | |
| | 180pF (181) | N | S | | A | A | B | B | | |
| 220pF (221) | N | S | | A | A | B | B | | | |
| 270pF (271) | N | S | | A | A | B | B | | | |
| 330pF (331) | N | S | | A | A | B | B | | | |
| 390pF (391) | N | S | | B | B | B | B | | | |
| 470pF (471) | N | S | | B | B | B | B | | | |
| 560pF (561) | | S | | B | B | B | B | | | |
| 680pF (681) | | S | | B | B | B | B | | | |
| 820pF (821) | | S | | B | B | B | B | | | |
| 1,000pF (102) | | S | | B | B | B | B | | | |
| 1,200pF (122) | | | | B | B | B | B | | | |
| 1,500pF (152) | | | | B | B | B | B | | | |
| 1,800pF (182) | | | | B | B | B | B | | | |
| 2,200pF (222) | | | | B | B | B | B | | | |
| 2,700pF (272) | | | | D | B | B | B | | | |
| 3,300pF (332) | | | | D | B | B | B | | | |
| 3,900pF (392) | | | | D | B | B | B | | | |
| 4,700pF (472) | | | | D | B | B | B | | | |
| 5,600pF (562) | | | | | B | B | B | | | |
| 6,800pF (682) | | | | | B | B | B | | | |
| 8,200pF (822) | | | | | D | D | D | | | |
| 0.010uF (103) | | | | | D | D | D | | | |

X7R Dielectric

| DIELECTRIC | Size | X7R | | | | | | | |
|---------------------|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----|
| | | 0402 | | 0603 | | 0805 | | 1206 | |
| RATED VOLTAGE (VDC) | 10,16,25,50 | 10,16,25,50 | 10,16,25,50 | 10,16,25,50 | 10,16,25,50 | 10,16,25,50 | 10,16,25,50 | 10,16,25,50 | 100 |
| Capacitance | 100pF (101) | N | N | S | S | B | B | | |
| | 120pF (121) | N | N | S | S | B | B | | |
| | 150pF (151) | N | N | S | S | B | B | B | B |
| | 180pF (181) | N | N | S | S | B | B | B | B |
| | 220pF (221) | N | N | S | S | B | B | B | B |
| | 270pF (271) | N | N | S | S | B | B | B | B |
| | 330pF (331) | N | N | S | S | B | B | B | B |
| | 390pF (391) | N | N | S | S | B | B | B | B |
| | 470pF (471) | N | N | S | S | B | B | B | B |
| | 560pF (561) | N | N | S | S | B | B | B | B |
| | 680pF (681) | N | N | S | S | B | B | B | B |
| | 820pF (821) | N | N | S | S | B | B | B | B |
| | 1,000pF (102) | N | N | S | S | B | B | B | B |
| | 1,200pF (122) | N | N | S | S | B | B | B | B |
| | 1,500pF (152) | N | N | S | S | B | B | B | B |
| | 1,800pF (182) | N | N | S | S | B | B | B | B |
| | 2,200pF (222) | N | N | S | S | B | B | B | B |
| | 2,700pF (272) | N | N | S | S | B | B | B | B |
| | 3,300pF (332) | N | N | S | S | B | B | B | B |
| | 3,900pF (392) | N | N | S | S | B | B | B | B |
| | 4,700pF (472) | N | N | S | S | B | B | B | B |
| | 5,600pF (562) | N | N | S | S | B | B | B | B |
| | 6,800pF (682) | N | N | S | S | B | B | B | B |
| | 8,200pF (822) | N | N | S | S | B | B | B | B |
| | 0.010uF (103) | N | N | S | S | B | B | B | B |
| | 0.012uF (123) | | | S | S | B | B | B | B |
| | 0.015uF (153) | | | S | S | B | B | B | B |
| | 0.018uF (183) | | | S | S | B | B | B | B |
| | 0.022uF (223) | | | S | S | B | B | B | B |
| | 0.027uF (273) | | | S | S | B | B | B | B |
| | 0.033uF (333) | | | S | X | B | B | B | B |
| | 0.039uF (393) | | | S | X | B | B | B | B |
| | 0.047uF (473) | | | S | X | B | B | B | B |
| 0.056uF (563) | | | S | X | B | B | B | B | |
| 0.068uF (683) | | | S | X | B | B | B | B | |
| 0.082uF (823) | | | S | X | B | B | B | B | |
| 0.10uF (104) | | | S | X | B | B | B | B | |
| 0.12uF (124) | | | | | B | D | B | B | |
| 0.15uF (154) | | | | | D | D | C | C | |
| 0.18uF (184) | | | | | D | D | C | C | |
| 0.22uF (224) | | | | | D | D | C | C | |
| 0.27uF (274) | | | | | | | C | C | |
| 0.33uF (334) | | | | | | | C | C | |
| 0.39uF (394) | | | | | | | C | J | |
| 0.47uF (474) | | | | | | | J | J | |
| 0.56uF (564) | | | | | | | J | J | |
| 0.68uF (684) | | | | | | | J | J | |
| 0.82uF (824) | | | | | | | J | J | |
| 1.0uF (105) | | | | | | | J | J | |
| 1.5uF (155) | | | | | | | | | |
| 2.2uF (225) | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
 2. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors without AEC-Q200

MG Series

■ FEATURES

- * A wide selection of sizes is available (0402 to 1812).
- * High capacitance in given case size.
- * Capacitor with lead-free termination (pure Tin).
- * High reliability design with severe quality controls.

■ GENERAL ELECTRICAL DATA

| Dielectric | NPO | X7R | X5R |
|----------------------------|--|---|---------------------|
| Size | 0402, 0603, 0805, 1206, 1210, 1812 | | |
| Capacitance range* | 0.5pF to 0.033μF | 100pF to 2.2μF | 0.056μF to 10μF |
| Capacitance tolerance** | Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%) | J (±5%), K (±10%), M (±20%) | |
| Rated voltage (WVDC) | 16V, 25V, 50V, 100V | 10V, 16V, 25V, 50V, 100V, 200V, 250V | 6.3V, 10V, 16V, 25V |
| Operating temperature | -55 to +125°C | | -55 to +85°C |
| Capacitance characteristic | ±30ppm/°C | | ±15% |
| Termination | Ni/Sn (lead-free termination) | | |

■ EXPLANATION OF PART NUMBERS

| MG | 31 | B | 104 | K | 500 | C | T |
|---|---|----------------------------|---|----------------------------|------------------------------------|----------------------------------|---------------------------------|
| Series MG= Automotive (without AEC-Q200 certification) | Size (Inch (mm)) 31=1206 (3216) | Dielectric B=X7R | Capacitance 104=10x10 ⁴ =0.1uF | Tolerance K=±10% | Rated voltage 500=50 VDC | Termination C=Cu/Ni/Sn | Packaging T=7" reeled |

* Please refer to page 2 "How to order" for more information.

■ CAPACITANCE RANGE

X5R Dielectric

| Dielectric | X5R | | | | | | | | | | | | | | | | | |
|--------------------|---------------|----|----|------|----|----|----|------|----|----|----|------|----|----|----|------|----|---|
| | 0402 | | | 0603 | | | | 0805 | | | | 1206 | | | | 1210 | | |
| Size | 6.3 | 10 | 16 | 6.3 | 10 | 16 | 25 | 6.3 | 10 | 16 | 25 | 6.3 | 10 | 16 | 25 | 10 | 16 | |
| Rated Voltage(VDC) | 6.3 | 10 | 16 | 6.3 | 10 | 16 | 25 | 6.3 | 10 | 16 | 25 | 6.3 | 10 | 16 | 25 | 10 | 16 | |
| Capacitance | 0.056μF (563) | | N | | | | | | | | | | | | | | | |
| | 0.068μF (683) | | N | | | | | | | | | | | | | | | |
| | 0.082μF (823) | | N | | | | | | | | | | | | | | | |
| | 0.10μF (104) | | N | N | | | | | | | | | | | | | | |
| | 0.15μF (154) | | N | N | | | | | | | | | | | | | | |
| | 0.22μF (224) | N | N | N | | | | X | | | | | | | | | | |
| | 0.27μF (274) | N | N | | | X | X | X | | | | | | | | | | |
| | 0.33μF (334) | N | N | | | X | X | X | | | | | | | | | | |
| | 0.39μF (394) | N | | | | X | X | X | | | | | | | | | | |
| | 0.47μF (474) | N | | | | X | X | X | | | | | | | | | | |
| | 0.68μF (684) | N | | | | X | X | X | | | | | | | | | | |
| | 0.82μF (824) | N | | | X | X | X | X | | | | | | | | | | |
| | 1.0μF (105) | | | | X | X | X | X | | | | | | | | | | |
| | 1.5μF (155) | | | | | | | | I | I | | | | J | J | P | K | K |
| | 2.2μF (225) | | | | | | | | I | I | I | I | | J | J | P | K | K |
| | 3.3μF (335) | | | | | | | | | | I | I | P | P | P | P | K | K |
| 4.7μF (475) | | | | | | | | | | I | I | P | P | P | P | K | K | |
| 6.8μF (685) | | | | | | | | | | | | P | P | | | | | |
| 10μF (106) | | | | | | | | | | | | P | P | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

NPO Dielectric

| Dielectric | | NPO | | | | | | | | | | | | |
|---------------------|-------------|-------------------------|-------------------------|-------------------------|-----|-----|-------------|------------------|------|-------|-------|------|-----------------|-----|
| Size | | 0402 | 0603 | 0805 | | | 1206 | | 1210 | | | 1812 | | |
| Rated Voltage (VDC) | | 10,16, 25,50, 100 | 10,16, 25,50, 100 | 10,16, 25,50, 100 | 200 | 250 | 500, 630 | 10,16, 25,50, | 100 | 10,16 | 25,50 | 100 | 10,16, 25,50 | 100 |
| Capacitance | 0.1pF (0R1) | | | | | | | | | | | | | |
| | 0.2pF (0R2) | | | | | | | | | | | | | |
| | 0.3pF (0R3) | | | | | | | | | | | | | |
| | 0.4pF (0R4) | | | | | | | | | | | | | |
| | 0.5pF (0R5) | N | S | A | A | A | A | | | | | | | |
| | 0.6pF (0R6) | N | S | A | A | A | A | | | | | | | |
| | 0.7pF (0R7) | N | S | A | A | A | A | | | | | | | |
| | 0.8pF (0R8) | N | S | A | A | A | A | | | | | | | |
| | 0.9pF (0R9) | N | S | A | A | A | A | | | | | | | |
| | 1.0pF (1R0) | N | S | A | A | A | A | | | | | | | |
| | 1.2pF (1R2) | N | S | A | A | A | A | | | | | | | |
| | 1.5pF (1R5) | N | S | A | A | A | A | B | B | | | | | |
| | 1.8pF (1R8) | N | S | A | A | A | A | B | B | | | | | |
| | 2.2pF (2R2) | N | S | A | A | A | A | B | B | | | | | |
| | 2.7pF (2R7) | N | S | A | A | A | A | B | B | | | | | |
| | 3.3pF (3R3) | N | S | A | A | A | A | B | B | | | | | |
| | 3.9pF (3R9) | N | S | A | A | A | A | B | B | | | | | |
| | 4.7pF (4R7) | N | S | A | A | A | A | B | B | | | | | |
| | 5.6pF (5R6) | N | S | A | A | A | A | B | B | | | | | |
| | 6.8pF (6R8) | N | S | A | A | A | A | B | B | | | | | |
| | 8.2pF (8R2) | N | S | A | A | A | A | B | B | | | | | |
| | 10pF (100) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 12pF (120) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 15pF (150) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 18pF (180) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 22pF (220) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 27pF (270) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 33pF (330) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 39pF (390) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 47pF (470) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 56pF (560) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 68pF (680) | N | S | A | A | A | A | B | B | C | C | C | D | D |
| | 82pF (820) | N | S | A | A | A | B | B | B | C | C | C | D | D |
| | 100pF (101) | N | S | A | A | B | B | B | B | C | C | C | D | D |
| | 120pF (121) | N | S | A | A | B | D | B | B | C | C | C | D | D |
| | 150pF (151) | N | S | A | B | D | D | B | B | C | C | C | D | D |
| | 180pF (181) | N | S | A | B | D | D | B | B | C | C | C | D | D |
| | 220pF (221) | N | S | A | D | D | D | B | B | C | C | C | D | D |
| | 270pF (271) | | S | A | D | D | D | B | B | C | C | C | D | D |
| | 330pF (331) | | S | A | D | D | D | B | B | C | C | C | D | D |
| | 390pF (391) | | S | B | D | D | D | B | B | C | C | C | D | D |
| | 470pF (471) | | S | B | D | | | B | B | C | C | C | D | D |
| 560pF (561) | | S | B | D | | | B | B | C | C | C | D | D | |
| 680pF (681) | | S | B | D | | | B | B | C | C | C | D | D | |
| 820pF (821) | | S | B | D | | | B | B | C | C | C | D | D | |
| 1,000pF (102) | | S | B | | | | B | B | C | C | C | D | D | |
| 1,200pF (122) | | | B | | | | B | B | C | C | C | D | D | |
| 1,500pF (152) | | | B | | | | B | B | C | C | C | D | D | |
| 1,800pF (182) | | | B | | | | B | B | C | C | C | D | D | |
| 2,200pF (222) | | | B | | | | B | B | C | C | C | D | D | |
| 2,700pF (272) | | | D | | | | B | B | C | C | C | D | D | |
| 3,300pF (332) | | | | | | | B | B | C | C | C | D | D | |
| 3,900pF (392) | | | | | | | B | B | C | C | C | D | D | |
| 4,700pF (472) | | | | | | | B | B | C | C | C | D | D | |
| 5,600pF (562) | | | | | | | B | B | C | C | C | D | D | |
| 6,800pF (682) | | | | | | | C | | C | C | C | D | D | |
| 8,200pF (822) | | | | | | | D | | C | C | C | D | D | |
| 0.010uF (103) | | | | | | | D | | C | C | C | D | D | |
| 0.012uF (123) | | | | | | | | | C | D | D | D | D | |
| 0.015uF (153) | | | | | | | | | C | D | D | D | D | |
| 0.018uF (183) | | | | | | | | | | | | D | D | |
| 0.022uF (223) | | | | | | | | | | | | D | D | |
| 0.027uF (273) | | | | | | | | | | | | D | D | |
| 0.033uF (333) | | | | | | | | | | | | D | D | |

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors without AEC-Q200 MG Series

X7R Dielectric

| Dielectric | | X7R | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|---------------|--------|----|----|-------------|----|----|-----|--------|----|----|-----|----------|--------|----|----|-----|----------|--------|----|----|-----|----------|------------|----|-----|----------|---|---|
| | | 0402 | | | 0603 | | | | 0805 | | | | | 1206 | | | | | 1210 | | | | | 1812 | | | | | |
| Size | | 10, 16 | 25 | 50 | 6.3, 10, 16 | 25 | 50 | 100 | 10, 16 | 25 | 50 | 100 | 200, 250 | 10, 16 | 25 | 50 | 100 | 200, 250 | 10, 16 | 25 | 50 | 100 | 200, 250 | 10, 16, 25 | 50 | 100 | 200, 250 | | |
| Capacitance | 100pF (101) | N | N | N | S | S | S | S | B | B | B | B | B | | | | | | | | | | | | | | | | |
| | 120pF (121) | N | N | N | S | S | S | S | B | B | B | B | B | | | | | | | | | | | | | | | | |
| | 150pF (151) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 180pF (181) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 220pF (221) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 270pF (271) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 330pF (331) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 390pF (391) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 470pF (471) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 560pF (561) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 680pF (681) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 820pF (821) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | |
| | 1,000pF (102) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 1,200pF (122) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 1,500pF (152) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 1,800pF (182) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 2,200pF (222) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 2,700pF (272) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 3,300pF (332) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 3,900pF (392) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 4,700pF (472) | N | N | N | S | S | S | S | B | B | B | B | B | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 5,600pF (562) | N | N | N | S | S | S | S | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 6,800pF (682) | N | N | N | S | S | S | S | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 8,200pF (822) | N | N | N | S | S | S | S | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 0.010uF (103) | N | N | N | S | S | S | S | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 0.012uF (123) | N | N | | S | S | S | | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 0.015uF (153) | N | N | | S | S | S | | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 0.018uF (183) | N | N | | S | S | S | | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 0.022uF (223) | N | N | | S | S | S | | B | B | B | B | D | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 0.027uF (273) | N | N | | S | S | S | | B | B | B | D | | B | B | B | B | B | B | C | C | C | C | C | C | D | D | D | D |
| | 0.033uF (333) | N | N | | S | S | X | | B | B | B | D | | B | B | B | B | B | G | C | C | C | C | C | C | D | D | D | D |
| | 0.039uF (393) | N | N | | S | S | X | | B | B | B | D | | B | B | B | B | B | G | C | C | C | C | C | C | D | D | D | D |
| | 0.047uF (473) | N | N | | S | S | X | | B | B | B | D | | B | B | B | B | B | G | C | C | C | C | C | D | D | D | D | D |
| 0.056uF (563) | N | | | S | S | X | | B | B | B | D | | B | B | B | B | B | G | C | C | C | C | C | D | D | D | D | D | |
| 0.068uF (683) | N | | | S | S | X | | B | B | B | D | | B | B | B | B | B | G | C | C | C | C | C | G | D | D | D | D | |
| 0.082uF (823) | N | | | S | S | X | | B | B | B | D | | B | B | B | D | G | C | C | C | C | C | G | D | D | D | D | D | |
| 0.10uF (104) | N | | | S | S | X | | B | B | B | D | | B | B | B | D | G | C | C | C | C | C | G | D | D | D | D | D | |
| 0.12uF (124) | | | | S | X | | | D | D | D | | | B | B | B | D | | | C | C | C | C | G | D | D | D | D | D | |
| 0.15uF (154) | | | | S | X | | | D | D | D | | | C | C | C | G | | | C | C | C | D | M | D | D | D | K | | |
| 0.18uF (184) | | | | S | X | | | D | D | D | | | C | C | C | G | | | C | C | C | D | M | D | D | D | K | | |
| 0.22uF (224) | | | | S | X | | | D | D | D | | | C | C | C | G | | | C | C | C | D | M | D | D | D | K | | |
| 0.27uF (274) | | | | X | | | | D | D | | | | C | C | D | | | | C | C | C | G | M | D | D | D | K | | |
| 0.33uF (334) | | | | X | | | | D | D | | | | C | C | D | | | | C | C | D | G | M | D | D | D | K | | |
| 0.39uF (394) | | | | X | | | | D | D | | | | C | J | P | | | | C | C | D | M | M | D | D | D | K | | |
| 0.47uF (474) | | | | X | | | | D | D | | | | J | J | P | | | | C | C | D | M | M | D | D | K | K | | |
| 0.56uF (564) | | | | | | | | D | D | | | | J | J | P | | | | D | D | D | M | | D | D | K | | | |
| 0.68uF (684) | | | | | | | | D | D | | | | J | J | P | | | | D | D | D | K | | D | K | K | | | |
| 0.82uF (824) | | | | | | | | D | D | | | | J | J | P | | | | D | D | D | K | | D | K | K | | | |
| 1.0uF (105) | | | | | | | | D | | | | | J | J | P | | | | D | D | D | K | | D | K | K | | | |
| 1.5uF (155) | | | | | | | | | | | | | J | P | | | | | K | G | | | | | | | K | | |
| 2.2uF (225) | | | | | | | | | | | | | J | P | | | | | K | G | | | | | | | M | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ FEATURES

- * High density mounting due to mounting space saving.
- * Mounting cost saving.
- * Increased throughput.

■ GENERAL ELECTRICAL DATA

| Dielectric | NP0 | X7R |
|-----------------------------|---------------------------------------|--------------------|
| Size | 4x0402 | 4x0402 |
| Capacitance range* | 10pF to 220pF | 1000pF to 0.1μF |
| Capacitance tolerance** | J (±5%), K (±10%) | K (±10%), M (±20%) |
| Rated voltage (WVDC) | 50V | 10V, 16V, 25V |
| Insulation resistance at Ur | ≥10GΩ or RxC≥500ΩxF whichever is less | |
| Operating temperature | -55 to +125°C | |
| Capacitance characteristic | ±30ppm | ±15% |
| Termination | Ni/Sn (lead-free termination) | |

■ EXPLANATION OF PART NUMBERS

| MY | 24 | N | 102 | J | 500 | C | T |
|---|--------------------------------------|---|---|---------------------------|------------------------------------|----------------------------------|---|
| Series MY= Automotive Capacitor array (with AEC-Q200 qualification) | Size (Inch (mm)) 24=4x0402 | Dielectric N=NP0 (C0G) B=X7R | Capacitance 102=10x10 ² =1000pFuF | Tolerance J=±5% | Rated voltage 500=50 VDC | Termination C=Cu/Ni/Sn | Packaging T=7" reeled G=13" reeled |

* Please refer to page 2 "How to order" for more information.

■ CAPACITANCE RANGE

| Size | 4 x 0402 | | | | |
|--------------------|---------------|-----|----|----|---|
| Dielectric | NP0 | X7R | | | |
| Rated Voltage(VDC) | 50 | 10 | 16 | 25 | |
| Capacitance | 10pF (100) | T | | | |
| | 15pF (150) | T | | | |
| | 22pF (220) | T | | | |
| | 33pF (330) | T | | | |
| | 47pF (470) | T | | | |
| | 68pF (680) | T | | | |
| | 100pF (101) | T | | | |
| | 150pF (151) | T | | | |
| | 180pF (181) | T | | | |
| | 220pF (221) | T | | | |
| | 270pF (271) | | | | |
| | 330pF (331) | | | | |
| | 470pF (471) | | | | |
| | 6,80pF (681) | | | | |
| | 1,000pF (102) | | T | T | T |
| | 1,500pF (152) | | T | T | T |
| | 2,200pF (222) | | T | T | T |
| | 3,300pF (332) | | T | T | T |
| | 4,700pF (472) | | T | T | T |
| | 6,800pF (682) | | T | T | T |
| | 0.010μF (103) | | T | T | T |
| | 0.015μF (153) | | T | T | T |
| | 0.022μF (223) | | T | T | T |
| | 0.033μF (333) | | T | T | T |
| 0.047μF (473) | | T | T | T | |
| 0.068μF (683) | | T | T | T | |
| 0.10μF (104) | | T | T | T | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Appendix I : Reliability Test Conditions and Requirements

* About Reliability Test Conditions and Requirements, please refer to Walsin MLCC approval sheet for more detail.

| No | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|--|---|----------------|-----------------------|---------------------|---|---|--------------------------|--|--|---|-----------------------|-------------------|--------------------------|-------------------|---------------|-------------------|---|-------------------|---|------|--------------------|-----------|--|-----------|------------------|-----------|--------------------------------|-----|-------------|-----|---------------------------------|-----|-------------------------|------|---|-----|-------------------|--------|----------|-----|-------|-----|---|------|---|-----|-----|------|--|------|----------------------|------|------|------|--|------|------------|----|------|-----|-----|------------|--------|--------------------|--|------|-----|-----|--|-----|-----|-----|-----|-----|-----|-----|---|-----|--|---------------|-----|-----|---------------------------|--|--|--------|-------------|---------------|-----|--------|---|-----|--------|------|-------------|------|------|-----|-----|
| 1. | Visual and Mechanical | --- | * No remarkable defect. * Dimensions to conform to individual specification sheet. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. | Capacitance | Class I: NPO Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10% | * Shall not exceed the limits given in the detailed spec. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3. | Q/ D.F. (Dissipation Factor) | Class II * : X7R,X7E, X6S, X5R,Y5V Cap≤10μF, 1.0±0.2Vrms, 1kHz±10% ** Cap>10μF, 0.5±0.2Vrms, 120Hz±20% ** Test condition: 0.5±0.2Vrms, 1KHz±10% X7R: 0603≥225(10V), 0805=106(6.3V&10V) X5R: 01R5≥103, 0201≥224 (6.3V,10V), 0402≥475 (6.3V), 0402≥225(10V), 0603=106 (6.3V,10V), TT18X≥475(10V) , TT15X series X6S:0201≥224 (6.3V),0402≥225 (6.3V), * Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement. | NPO: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C X7R,, X6S, X5R: <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥100V</td> <td>≤2.5%</td> <td>≤3%</td> <td>1206±0.47μF</td> </tr> <tr> <td></td> <td></td> <td>≤5%</td> <td>0805±0.1μF, 0603±0.068μF</td> </tr> <tr> <td rowspan="2">50V</td> <td rowspan="2">≤2.5%</td> <td>≤3%</td> <td>0201(50V); 0603±0.047μF; 0805±0.18μF; 1206±0.47μF</td> </tr> <tr> <td>≤5%</td> <td>1210±4.7μF</td> </tr> <tr> <td></td> <td></td> <td>≤10%</td> <td>0402±0.1μF; 0603±1μF; 0805±1μF; 1206±2.2μF; 1210±10μF; TT series</td> </tr> <tr> <td>35V</td> <td>≤3.5%</td> <td>≤10%</td> <td>0603±1μF;0805±2.2μF; 1210±10μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤3.5%</td> <td>≤5%</td> <td>0201±0.01μF;0805±1μF; 1210±10μF</td> </tr> <tr> <td>≤7%</td> <td>0603±0.33μF; 1206±4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0402±0.1μF;0603±0.47μF; 0805±2.2μF; 1206±6.8μF; 1210±22μF ; TT series</td> </tr> <tr> <td></td> <td></td> <td>≤12.5%</td> <td>0402±1μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5%</td> <td>0201±0.01μF; 0402±0.033μF; 0603±0.15μF; 0805±0.68μF; 1206±2.2μF; 1210±4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0201±0.1μF;0402±0.22μF;0603±0.68μF;0805±2.2μF; 1206±4.7μF; 1210±22μF; TT series</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0201±0.012μF;0402±0.33μF;0603±0.33μF; 0805±2.2μF;1206±2.2μF;1210±22μF; TT series</td> </tr> <tr> <td>≤15%</td> <td>0201±0.1μF; 0402±1μF</td> </tr> <tr> <td rowspan="2">6.3V</td> <td rowspan="2">≤10%</td> <td>≤15%</td> <td>0201±0.1μF;0402±1μF;0603±10μF; 0805±4.7μF; 1206±4.7μF ;1210±100μF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0402±2.2μF</td> </tr> <tr> <td>4V</td> <td>≤15%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> X7R/X7E, LD series : 100V: DF≤1.4%; ≤200V:DF≤1.0% Y5V: <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th colspan="2">Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤5%</td> <td>≤7%</td> <td>0603±0.1μF; 0805±0.47μF; 1206±4.7μF; TT series & Cap≥1μF</td> </tr> <tr> <td>35V</td> <td>≤7%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤5%</td> <td>≤7%</td> <td>0402±0.047μF;0603±0.1μF; 0805±0.33μF;1206±1μF; 1210±4.7μF</td> </tr> <tr> <td>≤9%</td> <td>0402±0.068μF;0603±0.47μF; 1206±4.7μF; 1210±22μF; TT series & Cap≥1μF</td> </tr> <tr> <td>16V (C<1.0μF)</td> <td>≤7%</td> <td>≤9%</td> <td>0402±0.068μF; 0603±0.68μF</td> </tr> <tr> <td></td> <td></td> <td>≤12.5%</td> <td>0402±0.22μF</td> </tr> <tr> <td>16V (C≥1.0μF)</td> <td>≤9%</td> <td>≤12.5%</td> <td>0603±2.2μF; 0805±3.3μF;1206±10μF; 1210±22μF; 1812±47μF; TT series & Cap≥1μF</td> </tr> <tr> <td>10V</td> <td>≤12.5%</td> <td>≤20%</td> <td>0402±0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> | Rated vol. | D.F.≤ | Exception of D.F. ≤ | | ≥100V | ≤2.5% | ≤3% | 1206±0.47μF | | | ≤5% | 0805±0.1μF, 0603±0.068μF | 50V | ≤2.5% | ≤3% | 0201(50V); 0603±0.047μF; 0805±0.18μF; 1206±0.47μF | ≤5% | 1210±4.7μF | | | ≤10% | 0402±0.1μF; 0603±1μF; 0805±1μF; 1206±2.2μF; 1210±10μF; TT series | 35V | ≤3.5% | ≤10% | 0603±1μF;0805±2.2μF; 1210±10μF | 25V | ≤3.5% | ≤5% | 0201±0.01μF;0805±1μF; 1210±10μF | ≤7% | 0603±0.33μF; 1206±4.7μF | ≤10% | 0402±0.1μF;0603±0.47μF; 0805±2.2μF; 1206±6.8μF; 1210±22μF ; TT series | | | ≤12.5% | 0402±1μF | 16V | ≤3.5% | ≤5% | 0201±0.01μF; 0402±0.033μF; 0603±0.15μF; 0805±0.68μF; 1206±2.2μF; 1210±4.7μF | ≤10% | 0201±0.1μF;0402±0.22μF;0603±0.68μF;0805±2.2μF; 1206±4.7μF; 1210±22μF; TT series | 10V | ≤5% | ≤10% | 0201±0.012μF;0402±0.33μF;0603±0.33μF; 0805±2.2μF;1206±2.2μF;1210±22μF; TT series | ≤15% | 0201±0.1μF; 0402±1μF | 6.3V | ≤10% | ≤15% | 0201±0.1μF;0402±1μF;0603±10μF; 0805±4.7μF; 1206±4.7μF ;1210±100μF; TT series | ≤20% | 0402±2.2μF | 4V | ≤15% | --- | --- | Rated vol. | D.F. ≤ | Exception of D.F.≤ | | ≥50V | ≤5% | ≤7% | 0603±0.1μF; 0805±0.47μF; 1206±4.7μF; TT series & Cap≥1μF | 35V | ≤7% | --- | --- | 25V | ≤5% | ≤7% | 0402±0.047μF;0603±0.1μF; 0805±0.33μF;1206±1μF; 1210±4.7μF | ≤9% | 0402±0.068μF;0603±0.47μF; 1206±4.7μF; 1210±22μF; TT series & Cap≥1μF | 16V (C<1.0μF) | ≤7% | ≤9% | 0402±0.068μF; 0603±0.68μF | | | ≤12.5% | 0402±0.22μF | 16V (C≥1.0μF) | ≤9% | ≤12.5% | 0603±2.2μF; 0805±3.3μF;1206±10μF; 1210±22μF; 1812±47μF; TT series & Cap≥1μF | 10V | ≤12.5% | ≤20% | 0402±0.47μF | 6.3V | ≤20% | --- | --- |
| Rated vol. | D.F.≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥100V | ≤2.5% | ≤3% | 1206±0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤5% | 0805±0.1μF, 0603±0.068μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V | ≤2.5% | ≤3% | 0201(50V); 0603±0.047μF; 0805±0.18μF; 1206±0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤5% | 1210±4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% | 0402±0.1μF; 0603±1μF; 0805±1μF; 1206±2.2μF; 1210±10μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤3.5% | ≤10% | 0603±1μF;0805±2.2μF; 1210±10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤3.5% | ≤5% | 0201±0.01μF;0805±1μF; 1210±10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤7% | 0603±0.33μF; 1206±4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% | 0402±0.1μF;0603±0.47μF; 0805±2.2μF; 1206±6.8μF; 1210±22μF ; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% | 0402±1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V | ≤3.5% | ≤5% | 0201±0.01μF; 0402±0.033μF; 0603±0.15μF; 0805±0.68μF; 1206±2.2μF; 1210±4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% | 0201±0.1μF;0402±0.22μF;0603±0.68μF;0805±2.2μF; 1206±4.7μF; 1210±22μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤5% | ≤10% | 0201±0.012μF;0402±0.33μF;0603±0.33μF; 0805±2.2μF;1206±2.2μF;1210±22μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0201±0.1μF; 0402±1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤10% | ≤15% | 0201±0.1μF;0402±1μF;0603±10μF; 0805±4.7μF; 1206±4.7μF ;1210±100μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0402±2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤15% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F. ≤ | Exception of D.F.≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤5% | ≤7% | 0603±0.1μF; 0805±0.47μF; 1206±4.7μF; TT series & Cap≥1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤7% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤5% | ≤7% | 0402±0.047μF;0603±0.1μF; 0805±0.33μF;1206±1μF; 1210±4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤9% | 0402±0.068μF;0603±0.47μF; 1206±4.7μF; 1210±22μF; TT series & Cap≥1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C<1.0μF) | ≤7% | ≤9% | 0402±0.068μF; 0603±0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% | 0402±0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C≥1.0μF) | ≤9% | ≤12.5% | 0603±2.2μF; 0805±3.3μF;1206±10μF; 1210±22μF; 1812±47μF; TT series & Cap≥1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤12.5% | ≤20% | 0402±0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤20% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4a. | Dielectric Strength | *To apply voltage(≤100V) 250%. *Duration: 1 to 5 sec. *Charge & discharge current less than 50mA. *To apply voltage: 200V ~300V & LD series ≥2 times V DC 500V ~ 999V ≥1.5 times V DC 1000V ~ 3000V ≥1.2 times V DC *Cut-off, set at 10mA *TEST= 15 sec. *RAMP=0 | *No evidence of damage or flash over during test. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4b. | Dielectric Strength (for X1/Y2 & X2/Y3) | * To apply 1500 VAC voltage. * Duration: 60 sec. | * No evidence of damage or flash over during test. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5. | Insulation Resistance | To apply rated voltage for max. 120 sec. | 10GΩ or RxC≥500Ω-F whichever is smaller. Class II (X7R, X7E, X6S, X5R, Y5V) <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V:0603±1μF;0805±1μF;1206±2.2μF;1210±4.7μF</td> </tr> <tr> <td>35V:0805±2.2μF;1210±10μF</td> </tr> <tr> <td>25V:0402±1μF;0603±2.2μF;0805±2.2μF;1206±10μF;1210±10μF</td> </tr> <tr> <td>16V:0201±0.1μF;0402±0.22μF;0603±1μF;0805±2.2μF;1206±10μF;1210±47μF</td> </tr> <tr> <td>10V:0201±47nF;0402±0.47μF;0603±0.47μF; 0805±2.2μF; 1206±4.7μF;1210±47μF</td> </tr> <tr> <td>6.3V ; 4V ; TT series</td> </tr> <tr> <td>50V: 0402±0.1μF</td> <td rowspan="2">RxC≥50 Ω-F</td> </tr> <tr> <td>35V:0603±1μF</td> </tr> <tr> <td>10V:0603±10μF</td> <td></td> </tr> </tbody> </table> Rated Voltage: 200V ~ 630V To apply rated voltage (500V max.) for 60 sec. >10GΩ or 100Ω-F whichever is smaller. Rated Voltage: >630V To apply 500V for 60sec. >10GΩ | Rated voltage | Insulation Resistance | 100V: X7R | 10GΩ or RxC≥100 Ω-F whichever is smaller. | 50V:0603±1μF;0805±1μF;1206±2.2μF;1210±4.7μF | 35V:0805±2.2μF;1210±10μF | 25V:0402±1μF;0603±2.2μF;0805±2.2μF;1206±10μF;1210±10μF | 16V:0201±0.1μF;0402±0.22μF;0603±1μF;0805±2.2μF;1206±10μF;1210±47μF | 10V:0201±47nF;0402±0.47μF;0603±0.47μF; 0805±2.2μF; 1206±4.7μF;1210±47μF | 6.3V ; 4V ; TT series | 50V: 0402±0.1μF | RxC≥50 Ω-F | 35V:0603±1μF | 10V:0603±10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: X7R | 10GΩ or RxC≥100 Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V:0603±1μF;0805±1μF;1206±2.2μF;1210±4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V:0805±2.2μF;1210±10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V:0402±1μF;0603±2.2μF;0805±2.2μF;1206±10μF;1210±10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V:0201±0.1μF;0402±0.22μF;0603±1μF;0805±2.2μF;1206±10μF;1210±47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V:0201±47nF;0402±0.47μF;0603±0.47μF; 0805±2.2μF; 1206±4.7μF;1210±47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V ; 4V ; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V: 0402±0.1μF | RxC≥50 Ω-F | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V:0603±1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V:0603±10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6. | Temperature Coefficient | With no electrical load. <table border="1"> <thead> <tr> <th>T.C.</th> <th>Operating Temp</th> </tr> </thead> <tbody> <tr> <td>NPO (C0G)</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>NPO (C0H)</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>NPO (C0J)</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X7R</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X7E</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X6S</td> <td>-55~105°C at 25°C</td> </tr> <tr> <td>X5R</td> <td>-55~ 85°C at 25°C</td> </tr> <tr> <td>Y5V</td> <td>-25~ 85°C at 20°C</td> </tr> </tbody> </table> | T.C. | Operating Temp | NPO (C0G) | -55~125°C at 25°C | NPO (C0H) | -55~125°C at 25°C | NPO (C0J) | -55~125°C at 25°C | X7R | -55~125°C at 25°C | X7E | -55~125°C at 25°C | X6S | -55~105°C at 25°C | X5R | -55~ 85°C at 25°C | Y5V | -25~ 85°C at 20°C | <table border="1"> <thead> <tr> <th>T.C.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>NPO (C0G)</td> <td>Within ±30ppm/°C</td> </tr> <tr> <td>NPO (C0H)</td> <td>Within ±60ppm/°C</td> </tr> <tr> <td>NPO (C0J)</td> <td>Within ±120ppm/°C</td> </tr> <tr> <td>X7R</td> <td>Within ±15%</td> </tr> <tr> <td>X7E</td> <td>Within ±4.7%</td> </tr> <tr> <td>X6S</td> <td>Within ±22%</td> </tr> <tr> <td>X5R</td> <td>Within ±15%</td> </tr> <tr> <td>Y5V</td> <td>Within +30%/ -80%</td> </tr> </tbody> </table> | T.C. | Capacitance Change | NPO (C0G) | Within ±30ppm/°C | NPO (C0H) | Within ±60ppm/°C | NPO (C0J) | Within ±120ppm/°C | X7R | Within ±15% | X7E | Within ±4.7% | X6S | Within ±22% | X5R | Within ±15% | Y5V | Within +30%/ -80% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T.C. | Operating Temp | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO (C0G) | -55~125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO (C0H) | -55~125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO (C0J) | -55~125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7R | -55~125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7E | -55~125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X6S | -55~105°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X5R | -55~ 85°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | -25~ 85°C at 20°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T.C. | Capacitance Change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO (C0G) | Within ±30ppm/°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO (C0H) | Within ±60ppm/°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO (C0J) | Within ±120ppm/°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7R | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7E | Within ±4.7% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X6S | Within ±22% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X5R | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | Within +30%/ -80% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7. | Adhesive Strength of Termination | *Pressurizing force: 01005:1N, 0201:2N, 0402 & 0603: 5N >0603: 10N *Test time:10 ±1 sec | * No remarkable damage or removal of the terminations. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Appendix I : Reliability Test Conditions and Requirements


| No | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--|---|------------|-------------|--------------------|----------------------------|------|-----|-------------|-------|--------------------------|----------------------------|------|-----|--|------|--|------|---|-----|-----|------|---------------------------------|-----|-----|------|---------------------------------|------|------------------------|------|---|------|----------|-----|-----|------|---|------|--|-----|-------|------|--|------|---------------------------------|------|------|------|--|----|------|-----|-----|------------|-------|--------------------|------|-------|------|-----------------------------------|-----|------|-----|-----|-----|-------|------|--|------|---|--------------|------|--------|---------------------------|--|--|------|-------------|--------------|--------|------|---|-----|------|------|-------------|------|------|-----|-----|---------------|-----------------------|-----------|---|---|--------------------------|--|--|--|
| 8. | Vibration Resistance | <ul style="list-style-type: none"> * Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) * Measurement to be made after keeping at room temp. for 24±2 hrs. | <ul style="list-style-type: none"> * No remarkable defect. * Dimensions to conform to individual specification sheet. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9. | Solderability | <ul style="list-style-type: none"> * Solder temperature: 235±5°C * Dipping time: 2±0.5 sec. | 95% min. coverage of all metalized area. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10. | Bending Test | *The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm / SH series: 5 mm** & 3 mm*** and then the pressure shall be maintained for 5±1 sec. *Measurement to be made after keeping at room temp. for 24±2 hrs. (** Thickness >1.0mm; *** Thickness≤1.0mm) | <ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X7E, X6S, X5R: within ±12.5% , Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11. | Resistance to Soldering Heat | <ul style="list-style-type: none"> * Solder temperature: 260±5°C * Dipping time: 10±1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs. | <ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X7E, X6S, X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12. | Temperature Cycle | <ul style="list-style-type: none"> * Conduct the five cycles according to the temperatures and time. <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2~3</td> </tr> </tbody> </table> <ul style="list-style-type: none"> * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs. | Step | Temp. (°C) | Time (min.) | 1 | Min. operating temp. +0/-3 | 30±3 | 2 | Room temp. | 2~3 | 3 | Max. operating temp. +3/-0 | 30±3 | 4 | Room temp. | 2~3 | <ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X7E, X6S, X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step | Temp. (°C) | Time (min.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Min. operating temp. +0/-3 | 30±3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Room temp. | 2~3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Max. operating temp. +3/-0 | 30±3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Room temp. | 2~3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13. | Humidity (Damp Heat) Steady State | <ul style="list-style-type: none"> * Test temp.: 40±2°C * Humidity: 90~95% RH * Test time: 500+24/0hrs. *Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs. | <ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X7E, X6S, X5R: ≥10V**, within ±12.5%; 6.3V within ±25%; TT series, within ±25% **10V:0603≥4.7µF;0402≥1µF;0201≥0.1µF, within ±25%; Y5V: ≥10V, within ±30%; 6.3V, within +30/-40% * Q/D.F. value: NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C, Less than 10pF Q≥200+10C X7R, X6S, X5R: <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥100V</td> <td rowspan="2">≤3%</td> <td>≤6%</td> <td>1206≥0.47µF</td> </tr> <tr> <td>≤7.5%</td> <td>0805≥0.1µF; 0603≥0.068µF</td> </tr> <tr> <td rowspan="3">≥50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V);0603≥0.047µF; 0805≥0.18µF; 1206≥0.47µF</td> </tr> <tr> <td>≤10%</td> <td>1210≥4.7µF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.1µF;0603≥1µF; 0805≥1µF; 1206≥2.2µF; 1210≥10µF; TT series</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1µF; 0805≥2.2µF; 1210≥10µF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10%</td> <td>0201≥0.01µF;0805≥1µF; 1210≥10µF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33µF;1206≥4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.10µF;0603≥0.47µF;0805≥2.2µF;1206≥6.8µF; 1210≥22µF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0402≥1µF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15µF;0805≥0.68µF;1206≥2.2µF;1210≥4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.01µF;0402≥0.033µF;0603≥0.68µF;0805≥2.2µF;1206≥4.7µF; 1210≥22µF; TT series</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.012µF;0402≥0.33µF; 0603≥0.33µF;0805≥2.2µF 1206≥2.2µF; 1210≥22µF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1µF ;0402≥1µF; TT series</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0201≥0.1µF;0402≥1µF;0603≥10µF; 0805≥4.7µF;1206≥47µF;1210≥100µF;TT series</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>X7R/X7E, LD series : DF≤3% Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603≥0.1µF;0805≥0.47µF;1206≥4.7µF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402≥0.047µF;0603≥0.1µF;0805≥0.33µF;1206≥1µF; 1210≥4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.068µF;0603≥0.47µF;1206≥4.7µF; 1210≥22µF; TT series & Cap≥1µF</td> </tr> <tr> <td>16V(C<1.0µF)</td> <td>≤10%</td> <td>≤12.5%</td> <td>0402≥0.068µF; 0603≥0.68µF</td> </tr> <tr> <td></td> <td></td> <td>≤20%</td> <td>0402≥0.22µF</td> </tr> <tr> <td>16V(C≥1.0µF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>0603≥2.2µF;0805≥3.3µF;1206≥10µF;1210≥22µF; 1812≥47µF; TT series & Cap≥1µF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402≥0.47µF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X7E, X6S, X5R, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="6">1GΩ or RxC≥10 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V:0603≥1µF;0805≥1µF;1206≥2.2µF;1210≥4.7µF</td> </tr> <tr> <td>35V:0805≥2.2µF;1210≥10µF</td> </tr> <tr> <td>25V:0402≥1µF;0603≥2.2µF;0805≥2.2µF;1206≥10µF;1210≥10µF</td> </tr> <tr> <td>16V:0201≥0.1µF;0402≥0.22µF;0603≥1µF;0805≥2.2µF;1206≥10µF;1210≥47µF</td> </tr> <tr> <td>10V:0201≥47nF;0402≥0.47µF;0603≥0.47µF; 0805≥2.2µF;1206≥4.7µF;1210≥47µF 6.3V ; 4V ; TT series</td> </tr> </tbody> </table> | Rated vol. | D.F.≤ | Exception of D.F.≤ | ≥100V | ≤3% | ≤6% | 1206≥0.47µF | ≤7.5% | 0805≥0.1µF; 0603≥0.068µF | ≥50V | ≤3% | ≤6% | 0201(50V);0603≥0.047µF; 0805≥0.18µF; 1206≥0.47µF | ≤10% | 1210≥4.7µF | ≤20% | 0402≥0.1µF;0603≥1µF; 0805≥1µF; 1206≥2.2µF; 1210≥10µF; TT series | 35V | ≤5% | ≤20% | 0603≥1µF; 0805≥2.2µF; 1210≥10µF | 25V | ≤5% | ≤10% | 0201≥0.01µF;0805≥1µF; 1210≥10µF | ≤14% | 0603≥0.33µF;1206≥4.7µF | ≤15% | 0402≥0.10µF;0603≥0.47µF;0805≥2.2µF;1206≥6.8µF; 1210≥22µF; TT series | ≤20% | 0402≥1µF | 16V | ≤5% | ≤10% | 0603≥0.15µF;0805≥0.68µF;1206≥2.2µF;1210≥4.7µF | ≤15% | 0201≥0.01µF;0402≥0.033µF;0603≥0.68µF;0805≥2.2µF;1206≥4.7µF; 1210≥22µF; TT series | 10V | ≤7.5% | ≤15% | 0201≥0.012µF;0402≥0.33µF; 0603≥0.33µF;0805≥2.2µF 1206≥2.2µF; 1210≥22µF | ≤20% | 0201≥0.1µF ;0402≥1µF; TT series | 6.3V | ≤15% | ≤30% | 0201≥0.1µF;0402≥1µF;0603≥10µF; 0805≥4.7µF;1206≥47µF;1210≥100µF;TT series | 4V | ≤20% | --- | --- | Rated vol. | D.F.≤ | Exception of D.F.≤ | ≥50V | ≤7.5% | ≤10% | 0603≥0.1µF;0805≥0.47µF;1206≥4.7µF | 35V | ≤10% | --- | --- | 25V | ≤7.5% | ≤10% | 0402≥0.047µF;0603≥0.1µF;0805≥0.33µF;1206≥1µF; 1210≥4.7µF | ≤15% | 0402≥0.068µF;0603≥0.47µF;1206≥4.7µF; 1210≥22µF; TT series & Cap≥1µF | 16V(C<1.0µF) | ≤10% | ≤12.5% | 0402≥0.068µF; 0603≥0.68µF | | | ≤20% | 0402≥0.22µF | 16V(C≥1.0µF) | ≤12.5% | ≤20% | 0603≥2.2µF;0805≥3.3µF;1206≥10µF;1210≥22µF; 1812≥47µF; TT series & Cap≥1µF | 10V | ≤20% | ≤30% | 0402≥0.47µF | 6.3V | ≤30% | --- | --- | Rated voltage | Insulation Resistance | 100V: X7R | 1GΩ or RxC≥10 Ω-F whichever is smaller. | 50V:0603≥1µF;0805≥1µF;1206≥2.2µF;1210≥4.7µF | 35V:0805≥2.2µF;1210≥10µF | 25V:0402≥1µF;0603≥2.2µF;0805≥2.2µF;1206≥10µF;1210≥10µF | 16V:0201≥0.1µF;0402≥0.22µF;0603≥1µF;0805≥2.2µF;1206≥10µF;1210≥47µF | 10V:0201≥47nF;0402≥0.47µF;0603≥0.47µF; 0805≥2.2µF;1206≥4.7µF;1210≥47µF 6.3V ; 4V ; TT series |
| Rated vol. | D.F.≤ | Exception of D.F.≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥100V | ≤3% | ≤6% | 1206≥0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤7.5% | 0805≥0.1µF; 0603≥0.068µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤3% | ≤6% | 0201(50V);0603≥0.047µF; 0805≥0.18µF; 1206≥0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% | 1210≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0402≥0.1µF;0603≥1µF; 0805≥1µF; 1206≥2.2µF; 1210≥10µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤5% | ≤20% | 0603≥1µF; 0805≥2.2µF; 1210≥10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤5% | ≤10% | 0201≥0.01µF;0805≥1µF; 1210≥10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤14% | 0603≥0.33µF;1206≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0402≥0.10µF;0603≥0.47µF;0805≥2.2µF;1206≥6.8µF; 1210≥22µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0402≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V | ≤5% | ≤10% | 0603≥0.15µF;0805≥0.68µF;1206≥2.2µF;1210≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0201≥0.01µF;0402≥0.033µF;0603≥0.68µF;0805≥2.2µF;1206≥4.7µF; 1210≥22µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤7.5% | ≤15% | 0201≥0.012µF;0402≥0.33µF; 0603≥0.33µF;0805≥2.2µF 1206≥2.2µF; 1210≥22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0201≥0.1µF ;0402≥1µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤15% | ≤30% | 0201≥0.1µF;0402≥1µF;0603≥10µF; 0805≥4.7µF;1206≥47µF;1210≥100µF;TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤20% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F.≤ | Exception of D.F.≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤7.5% | ≤10% | 0603≥0.1µF;0805≥0.47µF;1206≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤10% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤7.5% | ≤10% | 0402≥0.047µF;0603≥0.1µF;0805≥0.33µF;1206≥1µF; 1210≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0402≥0.068µF;0603≥0.47µF;1206≥4.7µF; 1210≥22µF; TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V(C<1.0µF) | ≤10% | ≤12.5% | 0402≥0.068µF; 0603≥0.68µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0402≥0.22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V(C≥1.0µF) | ≤12.5% | ≤20% | 0603≥2.2µF;0805≥3.3µF;1206≥10µF;1210≥22µF; 1812≥47µF; TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤20% | ≤30% | 0402≥0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤30% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: X7R | 1GΩ or RxC≥10 Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V:0603≥1µF;0805≥1µF;1206≥2.2µF;1210≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V:0805≥2.2µF;1210≥10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V:0402≥1µF;0603≥2.2µF;0805≥2.2µF;1206≥10µF;1210≥10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V:0201≥0.1µF;0402≥0.22µF;0603≥1µF;0805≥2.2µF;1206≥10µF;1210≥47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V:0201≥47nF;0402≥0.47µF;0603≥0.47µF; 0805≥2.2µF;1206≥4.7µF;1210≥47µF 6.3V ; 4V ; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Appendix I : Reliability Test Conditions and Requirements

| No | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|--|-------------------|------------|---------------------|-------------------|------|-----------------|--------------------------------|---------|----------|---|-----------------|---|-----|--------|-------------------------------------|--------------------------------------|-----------------------------|---|-----|---------|---------------|--|------|---------------|--|--|------|--------|--------------------------------------|------|-------|--|------|------|----------|------------|-------|--------------------|------|--------|--|-----|------|--------|------|------------|---|---------------|------|---|------------------|---------------|--------|---|------|-------------|------------------|----------|------|----------|---------------|-----------------------|-----------|--|---|--------------------------|--|--|---------------------------------------|---------------------------------|-----------------------|---------|-----|------|----------|-----|---------|------|-----|------|---------|--|------------|-------|---------------------|-------|-----|-----------------|--------------------------------|------|-----|---|-----------------|---|-----|-----|-------------------------------------|--------------------------------------|-----------------------------|---|-----|-----|---------------|--|-----|-----|--|--|-----|-------|--------------------------------------|------|------|--|----|------|-----|------------|-------|--------------------|------|-------|--|-----|------|-----|-----|-------|---|--------------|------|---|------------------|--------------|--------|--|-----|------|------------------|------|------|-----|---------------|-----------------------|-----------|---|---|--------------------------|--|--|--|-----------------------|
| 14. | Humidity (Damp Heat) Load | <p>* Test temp.: 40±2°C * Humidity: 90~95%RH * Test time: 500+24/-0 hrs. * To apply voltage: Rated voltage.(Max.500V) * Before initial measurement(Class II only): To apply test voltage for 1hr at 40°C and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.</p> | <p>* No remarkable damage. Cap change: NP0: ±7.5% or 0.75pF whichever is larger. X7R, X7E, X6S, X5R: ≥10V**, within ±12.5%; 6.3V within ±25%; TT series, within ±25% **10V:0603≥4.7µF;0402≥1µF;0201≥0.1µF, within ±25%; Y5V: ≥10V, within ±30%; 6.3V, within +30/-40% Q/D.F. value: NP0: C≥30pF,Q≥200;C<30pF, Q≥100+10/3C X7R, X6S, X5R:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥100V</td> <td rowspan="2">≤3%</td> <td>≤6% 1206±0.47µF</td> </tr> <tr> <td>≤7.5% 0805±0.1µF, 0603±0.068µF</td> </tr> <tr> <td rowspan="3">≥50V</td> <td rowspan="3">≤3%</td> <td>≤6% 0201(50V)0603±0.047µF; 0805±0.18µF; 1206±0.47µF</td> </tr> <tr> <td>≤10% 1210±4.7µF</td> </tr> <tr> <td>≤20% 0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series</td> </tr> <tr> <td rowspan="4">35V</td> <td rowspan="4">≤5%</td> <td>≤20% 0603±1µF; 0805±2.2µF;1210±10µF</td> </tr> <tr> <td>≤10% 0201±0.01µF;0805±1µF; 1210±10µF</td> </tr> <tr> <td>≤14% 0603±0.33µF;1206±4.7µF</td> </tr> <tr> <td>≤15% 0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤5%</td> <td>≤20% 0402±1µF</td> </tr> <tr> <td>≤10% 0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤15% 0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series</td> </tr> <tr> <td>≤15% 0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF</td> </tr> <tr> <td>10V</td> <td>≤7.5%</td> <td>≤20% 0201±0.1µF ;0402±1µF; TT series</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30% 0201±0.1µF;0402±1µF;0603±10µF; 0805±4.7µF;1206±4.7µF;1210±100µF;TT series</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> </tr> </tbody> </table> <p>X7R/X7E, LD series : DF≤3% Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10% 0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap≥1µF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> </tr> <tr> <td>25V</td> <td>≤7.5%</td> <td>≤10% 0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF</td> </tr> <tr> <td rowspan="2">16V (C<1.0µF)</td> <td rowspan="2">≤10%</td> <td>≤15% 0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap≥1µF</td> </tr> <tr> <td>≤20% 0402±0.22µF</td> </tr> <tr> <td>16V (C≥1.0µF)</td> <td>≤12.5%</td> <td>≤20% 0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap≥1µF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30% 0402±0.47µF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> </tr> </tbody> </table> <p>*I.R.: ≥10V, 500MΩ or 25 Q-F whichever is smaller. Class II (X7R, X7E, X6S, X5R, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="10">500MΩ or RxCa5 Q-F whichever is smaller.</td> </tr> <tr> <td>50V:0603±1µF;0805±1µF;1206±2.2µF;1210±4.7µF</td> </tr> <tr> <td>35V:0805±2.2µF;1210±10µF</td> </tr> <tr> <td>25V:0402±1µF;0603±2.2µF;0805±2.2µF;1206±10µF;1210±10µF</td> </tr> <tr> <td>16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF</td> </tr> <tr> <td>10V:0201±47nF;0402±0.47µF;0603±0.47µF</td> </tr> <tr> <td>0805±2.2µF;1206±4.7µF;1210±47µF</td> </tr> <tr> <td>6.3V : 4V : TT series</td> </tr> </tbody> </table> | Rated vol. | D.F.≤ | Exception of D.F. ≤ | ≥100V | ≤3% | ≤6% 1206±0.47µF | ≤7.5% 0805±0.1µF, 0603±0.068µF | ≥50V | ≤3% | ≤6% 0201(50V)0603±0.047µF; 0805±0.18µF; 1206±0.47µF | ≤10% 1210±4.7µF | ≤20% 0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series | 35V | ≤5% | ≤20% 0603±1µF; 0805±2.2µF;1210±10µF | ≤10% 0201±0.01µF;0805±1µF; 1210±10µF | ≤14% 0603±0.33µF;1206±4.7µF | ≤15% 0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series | 25V | ≤5% | ≤20% 0402±1µF | ≤10% 0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF | 16V | ≤5% | ≤15% 0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series | ≤15% 0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF | 10V | ≤7.5% | ≤20% 0201±0.1µF ;0402±1µF; TT series | 6.3V | ≤15% | ≤30% 0201±0.1µF;0402±1µF;0603±10µF; 0805±4.7µF;1206±4.7µF;1210±100µF;TT series | 4V | ≤20% | --- | Rated vol. | D.F.≤ | Exception of D.F.≤ | ≥50V | ≤7.5% | ≤10% 0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap≥1µF | 35V | ≤10% | --- | 25V | ≤7.5% | ≤10% 0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF | 16V (C<1.0µF) | ≤10% | ≤15% 0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap≥1µF | ≤20% 0402±0.22µF | 16V (C≥1.0µF) | ≤12.5% | ≤20% 0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap≥1µF | 10V | ≤20% | ≤30% 0402±0.47µF | 6.3V | ≤30% | --- | Rated voltage | Insulation Resistance | 100V: X7R | 500MΩ or RxCa5 Q-F whichever is smaller. | 50V:0603±1µF;0805±1µF;1206±2.2µF;1210±4.7µF | 35V:0805±2.2µF;1210±10µF | 25V:0402±1µF;0603±2.2µF;0805±2.2µF;1206±10µF;1210±10µF | 16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF | 10V:0201±47nF;0402±0.47µF;0603±0.47µF | 0805±2.2µF;1206±4.7µF;1210±47µF | 6.3V : 4V : TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F.≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥100V | ≤3% | ≤6% 1206±0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤7.5% 0805±0.1µF, 0603±0.068µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤3% | ≤6% 0201(50V)0603±0.047µF; 0805±0.18µF; 1206±0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤5% | ≤20% 0603±1µF; 0805±2.2µF;1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0201±0.01µF;0805±1µF; 1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤14% 0603±0.33µF;1206±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤5% | ≤20% 0402±1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V | ≤5% | ≤15% 0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤7.5% | ≤20% 0201±0.1µF ;0402±1µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤15% | ≤30% 0201±0.1µF;0402±1µF;0603±10µF; 0805±4.7µF;1206±4.7µF;1210±100µF;TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤20% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F.≤ | Exception of D.F.≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤7.5% | ≤10% 0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤10% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤7.5% | ≤10% 0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C<1.0µF) | ≤10% | ≤15% 0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402±0.22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C≥1.0µF) | ≤12.5% | ≤20% 0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤20% | ≤30% 0402±0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤30% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: X7R | 500MΩ or RxCa5 Q-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V:0603±1µF;0805±1µF;1206±2.2µF;1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V:0805±2.2µF;1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V:0402±1µF;0603±2.2µF;0805±2.2µF;1206±10µF;1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V:0201±47nF;0402±0.47µF;0603±0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0805±2.2µF;1206±4.7µF;1210±47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V : 4V : TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15. | | High Temperature Load (Endurance) | <p>*Test temp.: NP0, X7R/X7E: 125±3°C X6S: 105±3°C X5R, Y5V: 85±3°C *Test time: 1000+24/-0 hrs. *To apply voltage: (1) 6.3V or C≥10µF or TT series: 150% of rated voltage. (2) 10V≥Ur<500V: 200% of rated voltage. (3) 500V: 150% of rated voltage. (4) Ur≥630V: 120% of rated voltage. (5) 100% of rated voltage for below range.</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated voltage</th> <th>Capacitance range</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>6.3V,10V</td> <td>C≥0.1µF</td> </tr> <tr> <td>6.3V,10V</td> <td>C≥1.0µF</td> </tr> <tr> <td rowspan="2">0402</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>4V</td> <td>C≥22µF</td> </tr> <tr> <td>6.3V,10V</td> <td>C≥4.7µF</td> </tr> <tr> <td rowspan="2">0603</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>35V</td> <td>C≥1.0µF</td> </tr> <tr> <td>4V</td> <td>C≥47µF</td> </tr> <tr> <td rowspan="2">0805</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>6.3V</td> <td>C≥22µF</td> </tr> <tr> <td>6.3V</td> <td>C≥47µF</td> </tr> <tr> <td>1206</td> <td>NP0</td> <td>3000V</td> <td>C≥1.5pF</td> </tr> <tr> <td>TT18</td> <td>Y5V</td> <td>6.3V,10V</td> <td>C≥2.2µF</td> </tr> <tr> <td>TT21</td> <td>Y5V</td> <td>6.3V</td> <td>C≥10µF</td> </tr> <tr> <td>TT31</td> <td>Y5V</td> <td>6.3V</td> <td>C≥22µF</td> </tr> </tbody> </table> <p>(6)150% of rated voltage for below range.</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated voltage</th> <th>Capacitance</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X5R/X7R/X6S</td> <td>16V</td> <td>C≥0.1µF</td> </tr> <tr> <td>50V</td> <td>C≥0.1µF</td> </tr> <tr> <td rowspan="2">0402</td> <td rowspan="2">X5R/X7R/X6S</td> <td>10~25V</td> <td>C≥0.22µF</td> </tr> <tr> <td>16V</td> <td>C≥0.47µF</td> </tr> <tr> <td rowspan="2">0603</td> <td rowspan="2">X5R/X7R/</td> <td>10~50V</td> <td>C≥1.0µF</td> </tr> <tr> <td>16V</td> <td>C≥2.2µF</td> </tr> <tr> <td rowspan="4">0805</td> <td rowspan="2">X5R/X7R/</td> <td>10~50V</td> <td>C≥4.7µF</td> </tr> <tr> <td>50V</td> <td>C≥2.2µF</td> </tr> <tr> <td rowspan="2">Y5V</td> <td>100V</td> <td>C≥0.47µF</td> </tr> <tr> <td>16V</td> <td>C≥4.7µF</td> </tr> <tr> <td>2220</td> <td>X7R</td> <td>100V</td> <td>C≥6.8µF</td> </tr> </tbody> </table> <p>*Before initial measurement (Class II only): To apply test voltage for 1hr at test temp. and then set for 24±2 hrs at room temp. *Measurement to be made after keeping at room temp. for 24±2 hrs</p> | Size | Dielectric | Rated voltage | Capacitance range | 0201 | X7R/ X6S/ X5R | 6.3V,10V | C≥0.1µF | 6.3V,10V | C≥1.0µF | 0402 | X7R/ X6S/ X5R | 4V | C≥22µF | 6.3V,10V | C≥4.7µF | 0603 | X7R/ X6S/ X5R | 35V | C≥1.0µF | 4V | C≥47µF | 0805 | X7R/ X6S/ X5R | 6.3V | C≥22µF | 6.3V | C≥47µF | 1206 | NP0 | 3000V | C≥1.5pF | TT18 | Y5V | 6.3V,10V | C≥2.2µF | TT21 | Y5V | 6.3V | C≥10µF | TT31 | Y5V | 6.3V | C≥22µF | Size | Dielectric | Rated voltage | Capacitance | 0201 | X5R/X7R/X6S | 16V | C≥0.1µF | 50V | C≥0.1µF | 0402 | X5R/X7R/X6S | 10~25V | C≥0.22µF | 16V | C≥0.47µF | 0603 | X5R/X7R/ | 10~50V | C≥1.0µF | 16V | C≥2.2µF | 0805 | X5R/X7R/ | 10~50V | C≥4.7µF | 50V | C≥2.2µF | Y5V | 100V | C≥0.47µF | 16V | C≥4.7µF | 2220 | X7R | 100V | C≥6.8µF | <p>* No remarkable damage. Cap change: NP0: ±3.0% or ±0.3pF whichever is larger X7R, X7E, X6S, X5R: ≥10V**, within ±12.5%; 6.3V within ±25%; TT series, within ±25% **10V:0603≥4.7µF;0402≥1µF;0201≥0.1µF, within ±25%; Y5V: ≥10V, within ±30%; 6.3V, within +30/-40% Q/D.F. value: NP0: More than 30pF, Q≥350; 10pF≤C<30pF, Q≥275+2.5C; Less than 10pF, Q≥200+10C X7R, X6S, X5R:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥100V</td> <td rowspan="2">≤3%</td> <td>≤6% 1206±0.47µF</td> </tr> <tr> <td>≤7.5% 0805±0.1µF, 0603±0.068µF</td> </tr> <tr> <td rowspan="3">≥50V</td> <td rowspan="3">≤3%</td> <td>≤6% 0201(50V)0603±0.047µF; 0805±0.18µF; 1206±0.47µF</td> </tr> <tr> <td>≤10% 1210±4.7µF</td> </tr> <tr> <td>≤20% 0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series</td> </tr> <tr> <td rowspan="4">35V</td> <td rowspan="4">≤5%</td> <td>≤20% 0603±1µF; 0805±2.2µF;1210±10µF</td> </tr> <tr> <td>≤10% 0201±0.01µF;0805±1µF; 1210±10µF</td> </tr> <tr> <td>≤14% 0603±0.33µF;1206±4.7µF</td> </tr> <tr> <td>≤15% 0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤5%</td> <td>≤20% 0402±1µF</td> </tr> <tr> <td>≤10% 0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤15% 0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series</td> </tr> <tr> <td>≤15% 0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF</td> </tr> <tr> <td>10V</td> <td>≤7.5%</td> <td>≤20% 0201±0.1µF ;0402±1µF; TT series</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30% 0201±0.1µF;0402±1µF;0603±10µF; 0805±4.7µF;1206±4.7µF;1210±100µF;TT series</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> </tr> </tbody> </table> <p>X7R/X7E, LD series : DF≤3% Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10% 0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap≥1µF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> </tr> <tr> <td>25V</td> <td>≤7.5%</td> <td>≤10% 0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF</td> </tr> <tr> <td rowspan="2">16V(C<1.0µF)</td> <td rowspan="2">≤10%</td> <td>≤15% 0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap≥1µF</td> </tr> <tr> <td>≤20% 0402±0.22µF</td> </tr> <tr> <td>16V(C≥1.0µF)</td> <td>≤12.5%</td> <td>≤20% 0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF;TT series & Cap≥1µF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30% 0402±0.47µF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> </tr> </tbody> </table> <p>*I.R.: ≥10V, 1GΩ or 50 Q-F whichever is smaller. Class II (X7R, X7E, X6S, X5R, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="10">1GΩ or RxC≥10 Q-F whichever is smaller.</td> </tr> <tr> <td>50V:0603±1µF;0805±1µF;1206±2.2µF;1210±4.7µF</td> </tr> <tr> <td>35V:0805±2.2µF;1210±10µF</td> </tr> <tr> <td>25V:0402±1µF;0603±2.2µF;0805±2.2µF;1206±10µF;1210±10µF</td> </tr> <tr> <td>16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF</td> </tr> <tr> <td>10V:0201±47nF;0402±0.47µF;0603±0.47µF;0805±2.2µF; 1206±4.7µF;1210±47µF</td> </tr> <tr> <td>6.3V : 4V : TT series</td> </tr> </tbody> </table> | Rated vol. | D.F.≤ | Exception of D.F. ≤ | ≥100V | ≤3% | ≤6% 1206±0.47µF | ≤7.5% 0805±0.1µF, 0603±0.068µF | ≥50V | ≤3% | ≤6% 0201(50V)0603±0.047µF; 0805±0.18µF; 1206±0.47µF | ≤10% 1210±4.7µF | ≤20% 0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series | 35V | ≤5% | ≤20% 0603±1µF; 0805±2.2µF;1210±10µF | ≤10% 0201±0.01µF;0805±1µF; 1210±10µF | ≤14% 0603±0.33µF;1206±4.7µF | ≤15% 0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series | 25V | ≤5% | ≤20% 0402±1µF | ≤10% 0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF | 16V | ≤5% | ≤15% 0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series | ≤15% 0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF | 10V | ≤7.5% | ≤20% 0201±0.1µF ;0402±1µF; TT series | 6.3V | ≤15% | ≤30% 0201±0.1µF;0402±1µF;0603±10µF; 0805±4.7µF;1206±4.7µF;1210±100µF;TT series | 4V | ≤20% | --- | Rated vol. | D.F.≤ | Exception of D.F.≤ | ≥50V | ≤7.5% | ≤10% 0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap≥1µF | 35V | ≤10% | --- | 25V | ≤7.5% | ≤10% 0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF | 16V(C<1.0µF) | ≤10% | ≤15% 0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap≥1µF | ≤20% 0402±0.22µF | 16V(C≥1.0µF) | ≤12.5% | ≤20% 0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF;TT series & Cap≥1µF | 10V | ≤20% | ≤30% 0402±0.47µF | 6.3V | ≤30% | --- | Rated voltage | Insulation Resistance | 100V: X7R | 1GΩ or RxC≥10 Q-F whichever is smaller. | 50V:0603±1µF;0805±1µF;1206±2.2µF;1210±4.7µF | 35V:0805±2.2µF;1210±10µF | 25V:0402±1µF;0603±2.2µF;0805±2.2µF;1206±10µF;1210±10µF | 16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF | 10V:0201±47nF;0402±0.47µF;0603±0.47µF;0805±2.2µF; 1206±4.7µF;1210±47µF | 6.3V : 4V : TT series |
| Size | | Dielectric | Rated voltage | Capacitance range | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0201 | X7R/ X6S/ X5R | 6.3V,10V | C≥0.1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 6.3V,10V | C≥1.0µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0402 | X7R/ X6S/ X5R | 4V | C≥22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 6.3V,10V | C≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0603 | X7R/ X6S/ X5R | 35V | C≥1.0µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 4V | C≥47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0805 | X7R/ X6S/ X5R | 6.3V | C≥22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 6.3V | C≥47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1206 | NP0 | 3000V | C≥1.5pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TT18 | Y5V | 6.3V,10V | C≥2.2µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TT21 | Y5V | 6.3V | C≥10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TT31 | Y5V | 6.3V | C≥22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Size | Dielectric | Rated voltage | Capacitance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0201 | X5R/X7R/X6S | 16V | C≥0.1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥0.1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0402 | X5R/X7R/X6S | 10~25V | C≥0.22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 16V | C≥0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0603 | X5R/X7R/ | 10~50V | C≥1.0µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 16V | C≥2.2µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0805 | X5R/X7R/ | 10~50V | C≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥2.2µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Y5V | 100V | C≥0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 16V | C≥4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2220 | X7R | 100V | C≥6.8µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F.≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥100V | ≤3% | ≤6% 1206±0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤7.5% 0805±0.1µF, 0603±0.068µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤3% | ≤6% 0201(50V)0603±0.047µF; 0805±0.18µF; 1206±0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤5% | ≤20% 0603±1µF; 0805±2.2µF;1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0201±0.01µF;0805±1µF; 1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤14% 0603±0.33µF;1206±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤5% | ≤20% 0402±1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V | ≤5% | ≤15% 0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤7.5% | ≤20% 0201±0.1µF ;0402±1µF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤15% | ≤30% 0201±0.1µF;0402±1µF;0603±10µF; 0805±4.7µF;1206±4.7µF;1210±100µF;TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤20% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F.≤ | Exception of D.F.≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤7.5% | ≤10% 0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤10% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤7.5% | ≤10% 0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V(C<1.0µF) | ≤10% | ≤15% 0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402±0.22µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V(C≥1.0µF) | ≤12.5% | ≤20% 0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF;TT series & Cap≥1µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤20% | ≤30% 0402±0.47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤30% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: X7R | 1GΩ or RxC≥10 Q-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V:0603±1µF;0805±1µF;1206±2.2µF;1210±4.7µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V:0805±2.2µF;1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V:0402±1µF;0603±2.2µF;0805±2.2µF;1206±10µF;1210±10µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V:0201±47nF;0402±0.47µF;0603±0.47µF;0805±2.2µF; 1206±4.7µF;1210±47µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V : 4V : TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16. | | ESR | For RF Series only, refer to data sheet. | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

■ Constructions

| No. | Name | NPO | NPO/X7R/X6S/X5R/Y5V |
|-----|------------------|--------------|---------------------|
| ① | Ceramic material | BaTiO3 based | |
| ② | Inner electrode | AgPd alloy | Ni |
| ③ | Inner layer | Ag | Cu |
| ④ | Termination | Middle layer | Ni |
| ⑤ | | Outer layer | Sn |

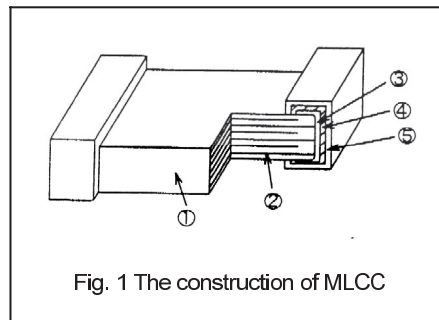

■ Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

■ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N2 within oven are recommended.

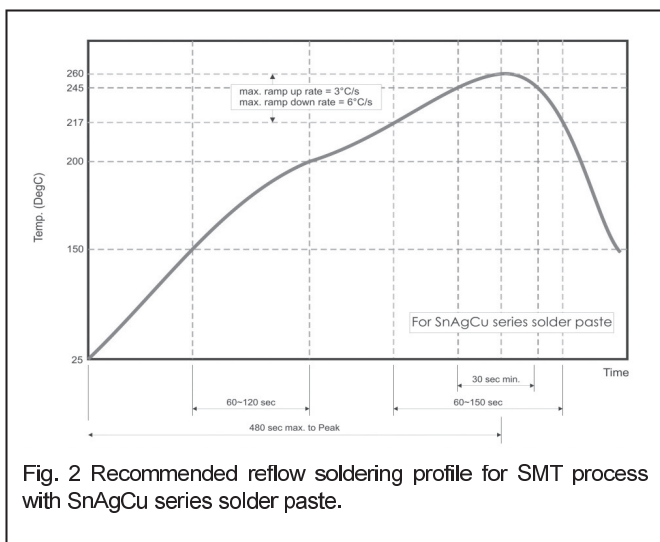


Fig. 2 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

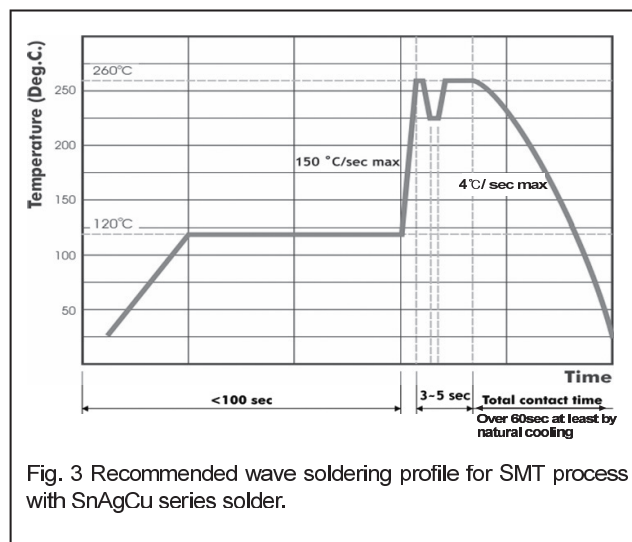


Fig. 3 Recommended wave soldering profile for SMT process with SnAgCu series solder.

Taiwan - Yang-Mei Plant / Sales Office

Walsin Technology Corporation
566-1, Kao-Shi Road, Yang-Mei,
Tao-Yuan, Taiwan
Tel: +886-3-475-8711
Fax: +886-3-475-7130
Email: info@passivecomponent.com

Taiwan - Kaohsiung Plant

Walsin Technology Corporation
1st, West 13 Street, K.E.P.Z.
Kaohsiung, Taiwan
Tel: +886-7-821-8171
Fax: +886-7-813-1661
Email: info@passivecomponent.com

China - Dalang Plant / Sales Office

Dongguan Walsin Tech. Electronics CO., Ltd.
Xiniupo Administrative Zone,
Dalang Town, Dongguan City,
Guangdong Province 523799
Tel: +86-769-831-15168
Fax: +86-769-831-15188
Email: stlin@passivecomponent.com

China - Suzhou Plant / Sales Office

Suzhou Walsin Technology Electronics Co., Ltd.
No. 369, Changyan Street,
Suzhou Industrial Park,
Jiangsu Province 215126
Tel: +86-512-628-36888
Fax: +86-512-628-37888
Email: davidcheng@passivecomponent.com

China - Guangzhou Plant / Sales Office

Pan Overseas (Guangzhou) Electronic Co., Ltd.
No. 277, Hong Ming Road, Eastern Section,
Guangzhou Economic and Technology
Development Zone, China
Tel: +86-20-8223-7476
Fax: +86-20-8223-7475
Email: info@passivecomponent.com

China - Chongqing Sales Office

Avenue of Stars Yongchuan District No.999
Chongqing , China
Tel: +86-512-628-36888 Ext:5329
Fax: +86-512-628-37888
Email: tommylee@passivecomponent.com

Germany - Munich Sales Office

Walsin Technology Corporation Europe
Stefan-George-Ring 29, 81929 Munich, Germany
Tel: +49-(0)89-9308-6475
Fax: +49-(0)89-9308-6464
Email: aw@passivecomponent.com

Singapore - Sales Office

WTC Singapore Sales Office, Singapore
8 Ubi View #04-01 Serial System Building
Singapore 408554
Tel: +65-6896-3877
Fax: +65-6861-3381
Email: michaelchee@sg.passivecomponent.com

United States - West Coast Sales Office

Walsin Technology Corporation, USA
39500 Stevenson Place Suite 101,
Fremont, CA 94539, USA
Tel: +1-214-708-5182
E-mail: fctseng@passivecomponent.com

JAPAN - Sales Office

WTC Japan Sales Office, Japan
8-4-17, Fukayanaka, Ayase-shi,
Kanagawa, 252-1107, Japan.
Tel: +81-467-71-0884
Fax: +81-467-71-0910
Email: tsakano@kamaya.co.jp



Walsin Technology Corporation

TAIWAN - WTC Yang-Mei Plant / Sales Office

Walsin Technology Corporation

566-1, Kao-Shi Road, Yang-Mei, Tao-Yuan, Taiwan

Tel: +886-3-475-8711

Fax: +886-3-475-7130

Email: info@passivecomponent.com

Kaohsiung Plant, Taiwan

Walsin Technology Corporation

1st, West 13 Street, K.E.P.Z. Kaohsiung, Taiwan

Tel: +886-7-821-8171

Fax: +886-7-813-1661

Email: info@passivecomponent.com



Jan 2014