


# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠

ACMS series for DC power line (ACM 系列適用於直流電源信號線)

Rated Current (耐電流): 1-3A(安培)

EQUIVALENT CIRCUIT DIAGRAM 同等電路圖



## Electrical characteristics 電氣特性

Part Number 產品料號	Impedance 阻值(歐姆) ( $\Omega$ ) $\pm$ 25% [100MHz]	DC Resistance 直流阻抗 $\Omega$ (MAX) (歐姆)	Rated Current mA (MAX) 耐電流
<b>1608 系列</b>			
ACMS160808A300	30	0.04	3000
ACMS160808A600	60	0.04	3000
ACMS160808A121 2A	120	0.05	2000
<b>2012 系列</b>			
ACMS201209A110	11	0.03	3000
ACMS201209A170	17	0.03	3000
ACMS201209A310	31	0.03	3000
ACMS201209A470	47	0.03	3000
ACMS201209A520	52	0.03	3000
ACMS201209A600	60	0.04	3000
ACMS201209A800	80	0.04	3000
ACMS201209A101	100	0.04	3000
ACMS201209A121	120	0.05	3000
ACMS201209A221	220	0.05	3000
ACMS201209A301	300	0.05	3000
ACMS201209A601 2A	600	0.10	2000
ACMS201209A102 1A	1000	0.30	1000
ACMS201209A152 1A	1500	0.30	1000
ACMS201209B121	120	0.10	3000
<b>3216 系列</b>			
ACMS321611A190	19	0.03	3000
ACMS321611A310	31	0.03	3000
ACMS321611A520	52	0.03	3000
ACMS321611A700	70	0.04	3000
ACMS321611A101	100	0.04	3000
ACMS321611A151	150	0.05	3000
ACMS321611A301	300	0.06	3000
ACMS321611A501 2.5A	500	0.07	2500
ACMS321611A601 2A	600	0.08	2000
ACMS321611A102 1A	1000	0.30	1000
<b>3225 系列</b>			
ACM322513A520	52	0.03	3000
ACM322513A600	60	0.03	3000
<b>4516 系列</b>			
ACMS451616A600	60	0.04	3000
ACMS451616A800	80	0.04	3000
ACMS451616A101	100	0.04	3000
ACMS451616A181	180	0.04	3000
ACMS451616A851 1.5A	850(at 50MHz)	0.10	1500
<b>4532 系列</b>			
ACMS453215A121	120	0.04	3000
ACMS453215A151	150	0.04	3000
ACMS453215A132 2A	1300(at 30MHz)	0.06	2000

\* TEST EQUIPMENT: HP-4291A IMPEDANCE ANALYZER 測試設備: HP-4291A 阻值分析儀

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
鈺鎧保留更改此目錄中任何內容之權利. 而不再另行通知.

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


ACMS series for DC power line (ACMS 系列適用於直流電源信號線)

Rated Current (耐電流): 1-3A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


ACMS160808A300

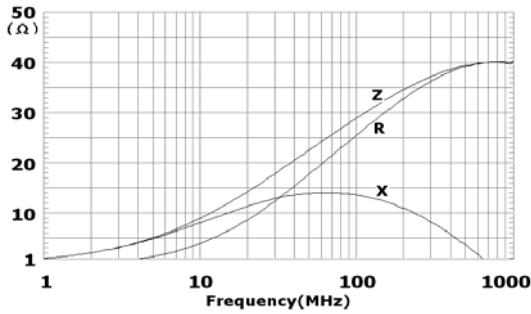


ACMS160808A600

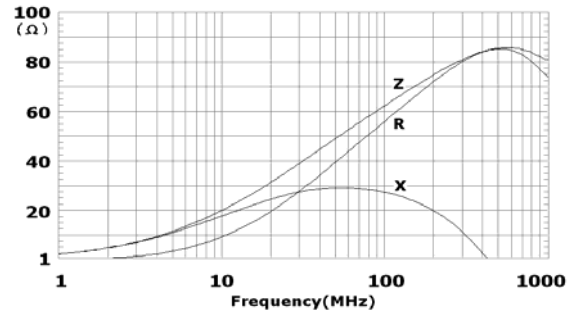


ACMS160808A121 2A

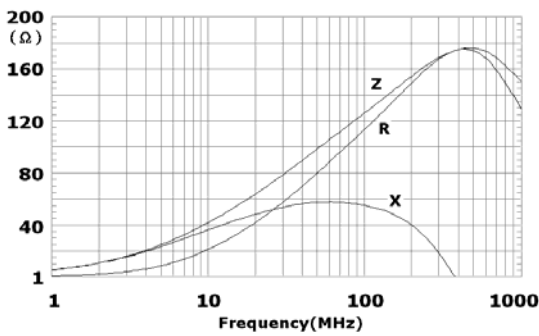


ACMS201209A110

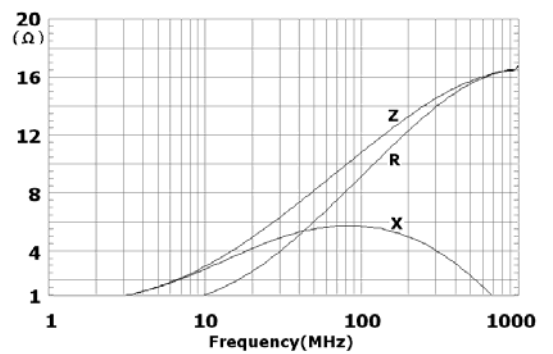


ACMS201209A170

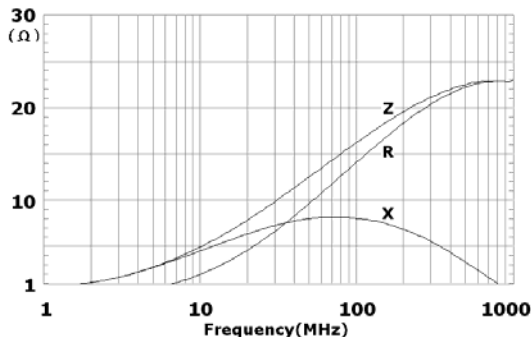


ACMS201209A310

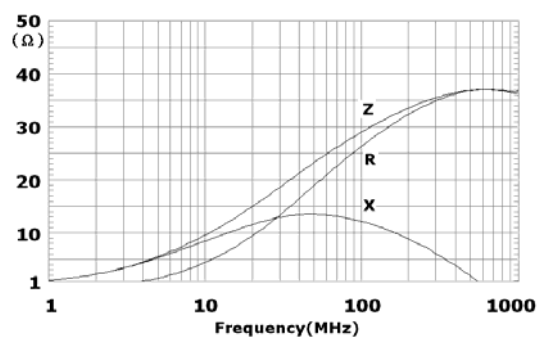

ACMS201209A470

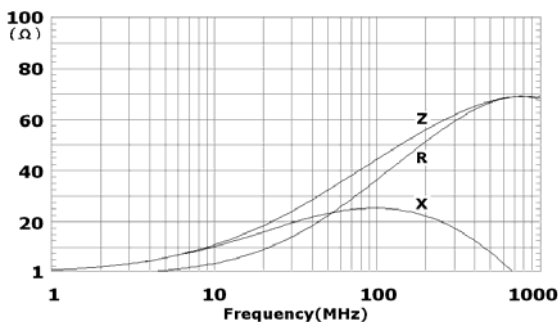

ACMS201209A520

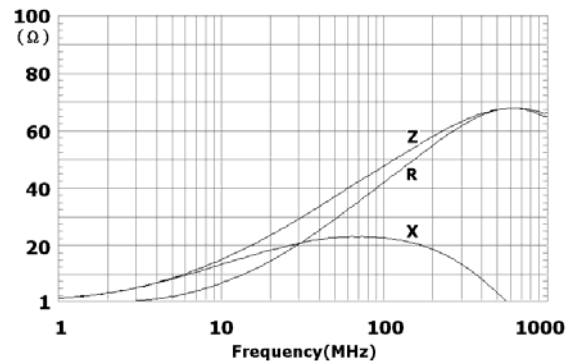

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
 鈺鎧保留更改此目錄中任何內容之權利。而不再另行通知。

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


ACMS series for DC power line (ACMS 系列適用於直流電源信號線)

Rated Current (耐電流): 1-3A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


ACMS201209A600

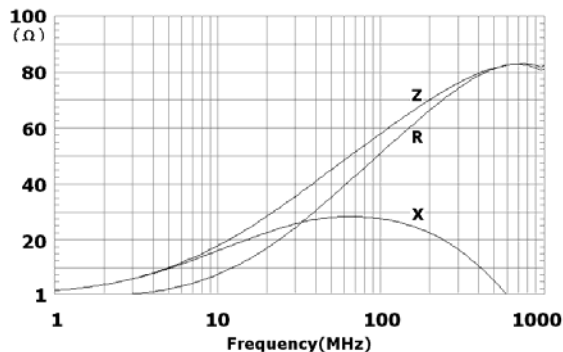


ACMS201209A800

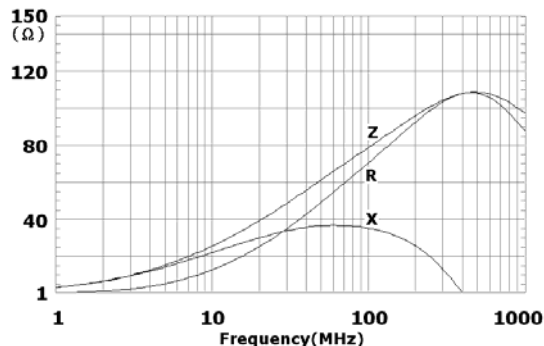


ACMS201209A101

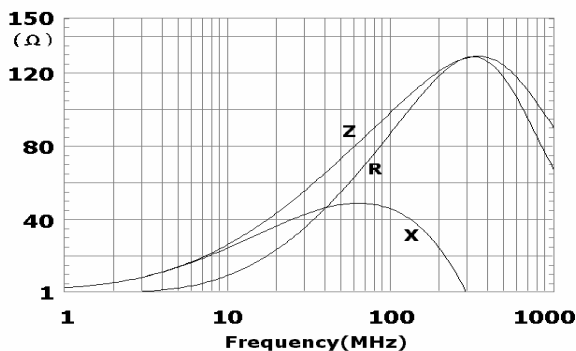


ACMS201209A121

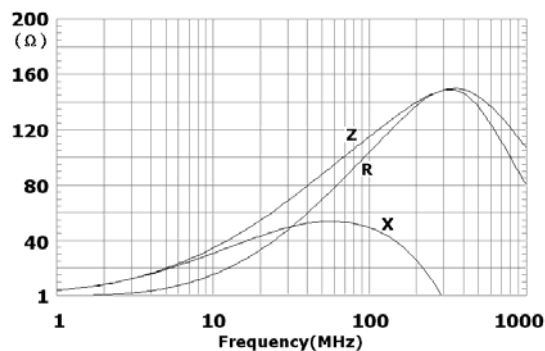


ACMS201209A221

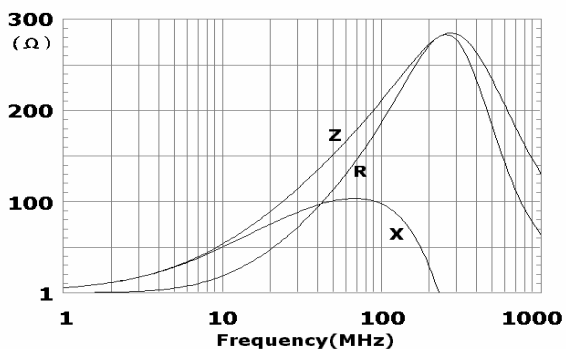


ACMS201209A301

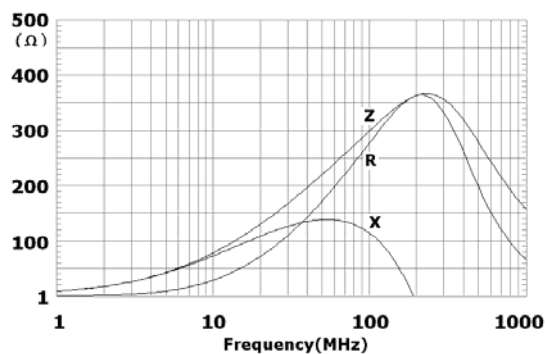

ACMS201209A601 2A

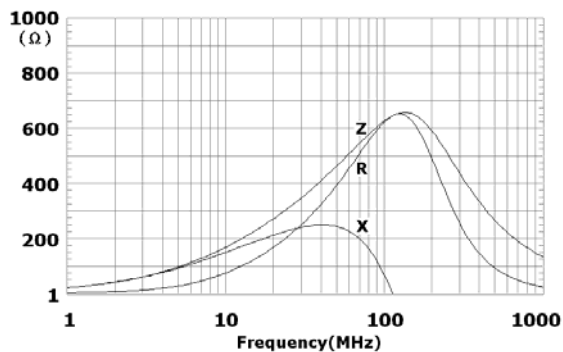

ACMS201209A102 1A

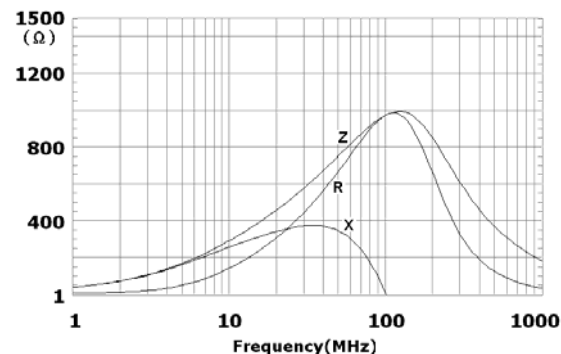

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
 鈺鎧保留更改此目錄中任何內容之權利. 而不再另行通知.

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


ACMS series for DC power line (ACMS 系列適用於直流電源信號線)

Rated Current (耐電流): 1-3A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


ACMS201209A152 1A

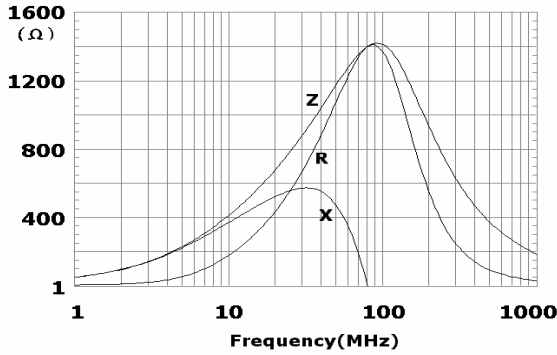


ACMS201209B121

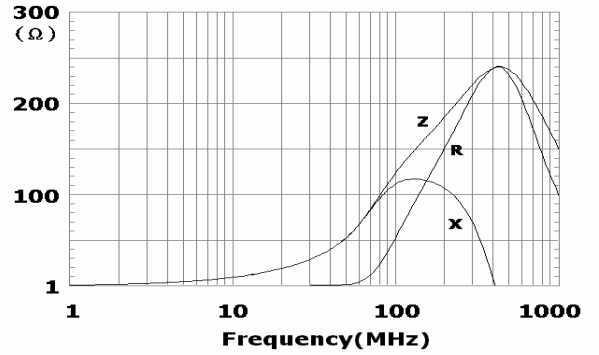


ACMS321611A190

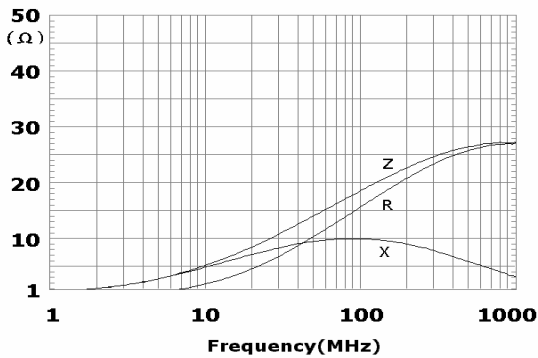


ACMS321611A310

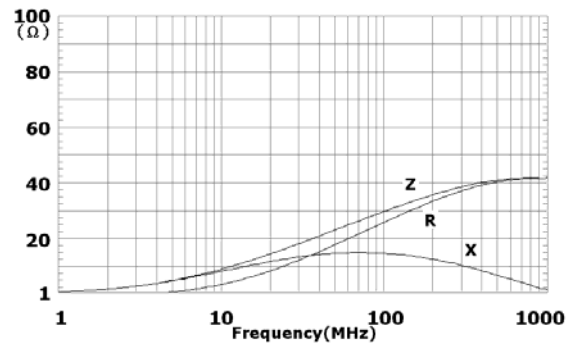


ACMS321611A520

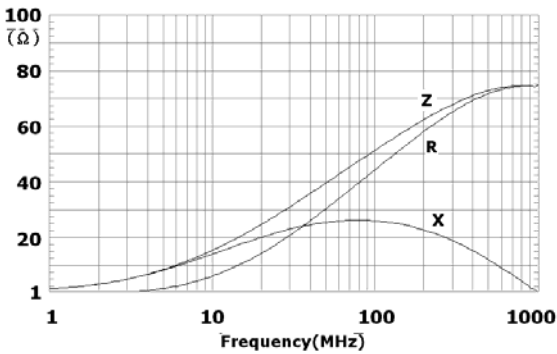


ACMS321611A700

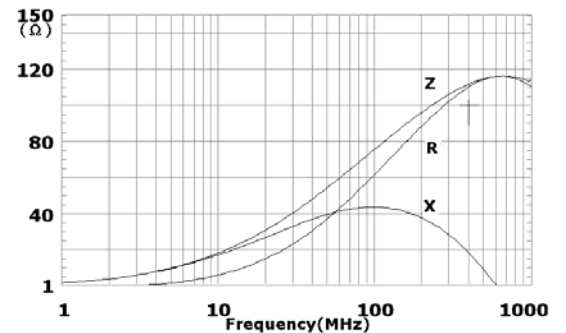

ACMS321611A101

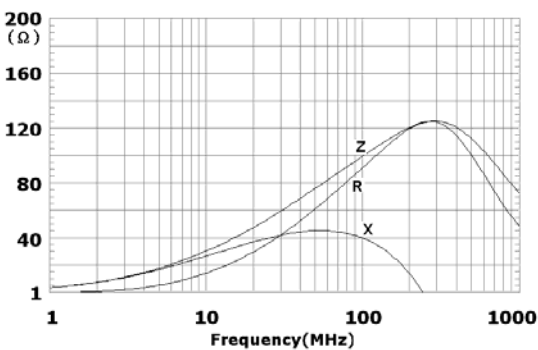

ACMS321611A151

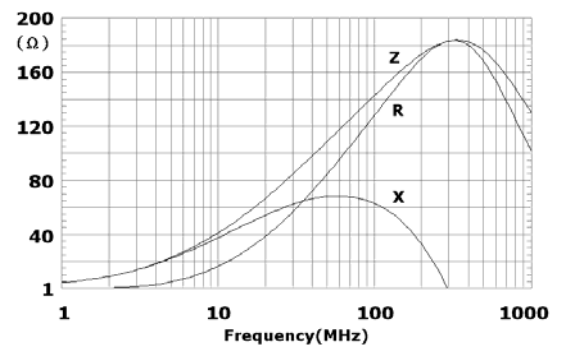

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
 鈺鑑保留更改此目錄中任何內容之權利。而不再另行通知。

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


ACMS series for DC power line (ACMS 系列適用於直流電源信號線)

Rated Current (耐電流): 1-3A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


ACMS321611A301

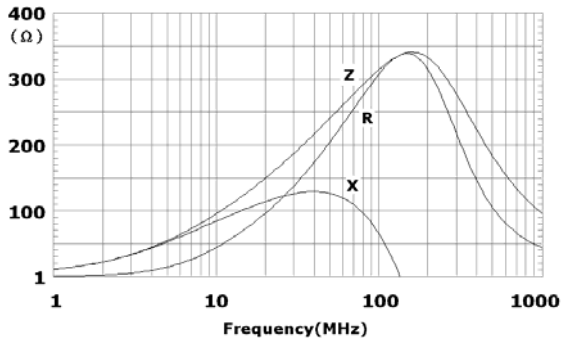


ACMS321611A501 2A

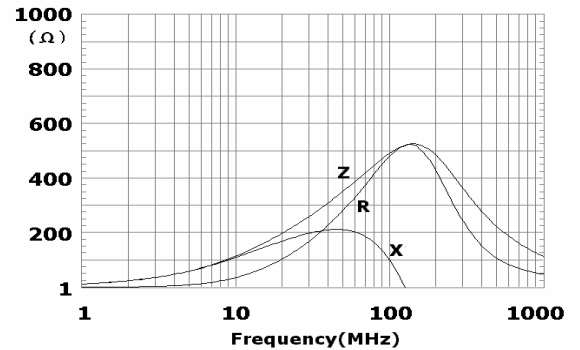


ACMS321611A601 2A

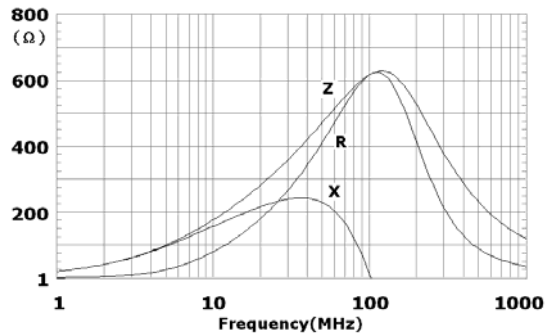


ACMS321611A102 1A

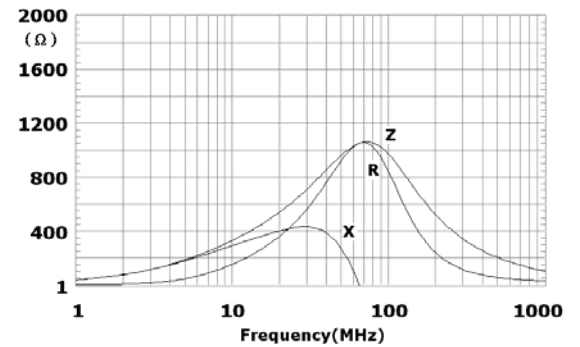


ACMS322513A520

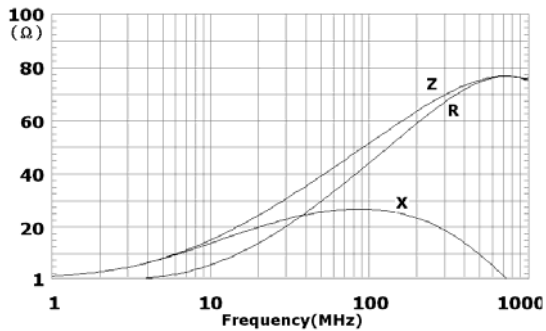


ACMS322513A600

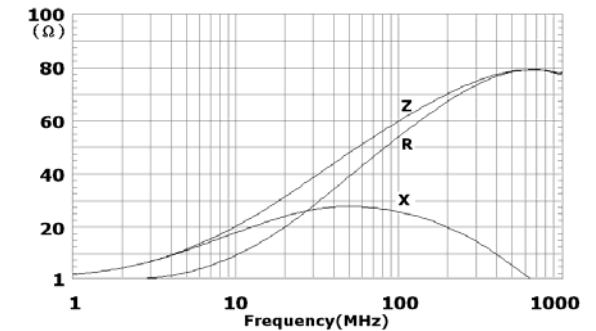

ACMS451616A600

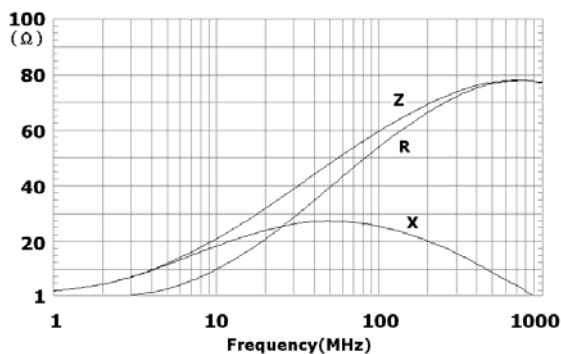

ACMS451616A800

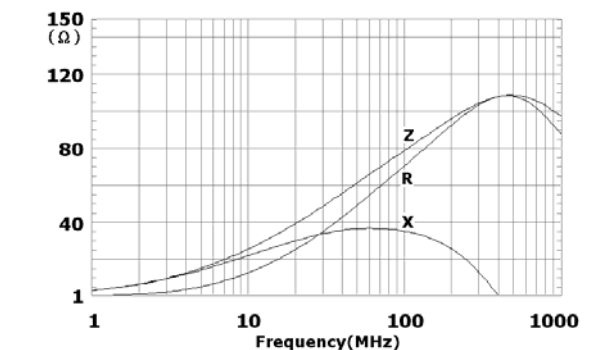

\* Max Echo reserves the rights for revising the content of this catalog without further notification.

鈺鑽保留更改此目錄中任何內容之權利。而不再另行通知。

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


ACMS series for DC power line (ACMS 系列適用於直流電源信號線)

Rated Current (耐電流): 1-3A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X vs. 頻率特性


ACMS451616A101

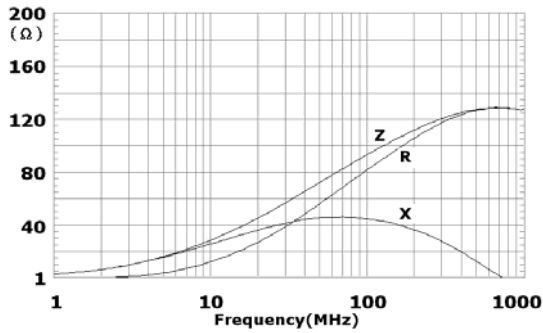


ACMS451616A181

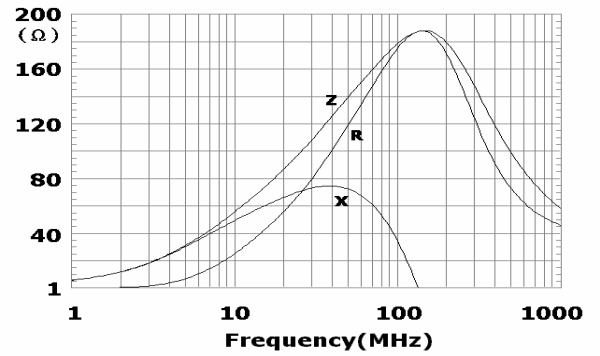


ACMS451616A851 1.5A

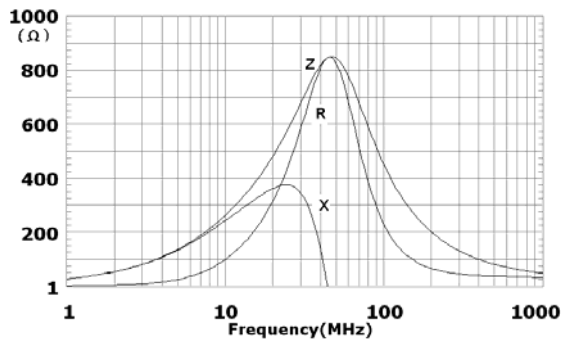


ACMS453215A121

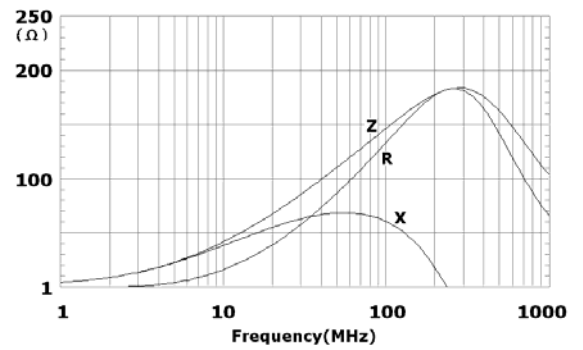

ACMS453215A151

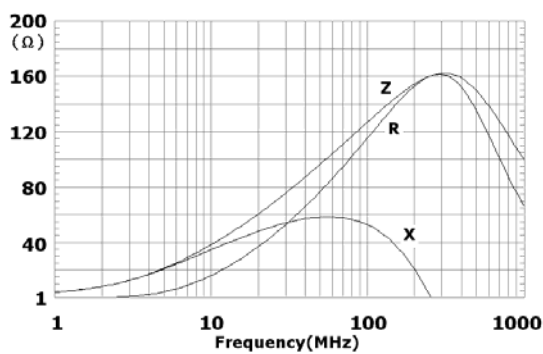

ACMS453215A132 2A

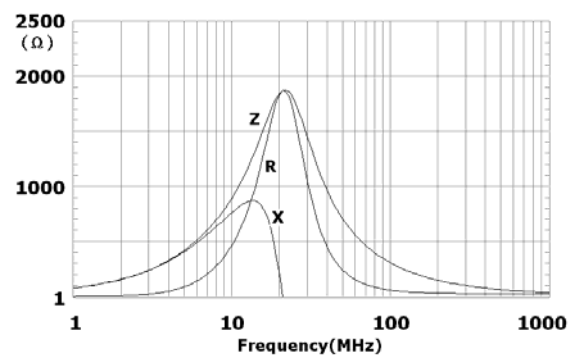

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
 鈺鎧保留更改此目錄中任何內容之權利. 而不再另行通知.