


MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠

BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)

EQUIVALENT CIRCUIT DIAGRAM 同等電路圖



•No directionality 無方向性



Electrical characteristics 電氣特性

Part Number 產品料號	Impedance 阻值(歐姆) (Ω) \pm 25% [100MHz]	DC Resistance 直流阻抗 Ω (MAX) (歐姆)	Rated Current mA (MAX) 耐電流
2012 系列			
BCMS201209A070	7	0.008	6000
BCMS201209A110	11	0.008	6000
BCMS201209A170	17	0.008	6000
BCMS201209A300	30	0.008	6000
BCMS201209A390RDC008	39	0.008	6000
BCMS201209A600	60	0.020	6000
BCMS201209A800	80	0.020	6000
BCMS201209A121	120	0.025	6000
3216 系列			
BCMS321611A310	31	0.006	6000
BCMS321611A520	52	0.020	6000
BCMS321611A800 4A	80	0.030	4000
BCMS321611A121 5A	120	0.025	5000
3225 系列			
BCMS322513A520	52	0.020	6000
BCMS322513A600	60	0.020	6000
4516 系列			
BCMS451616A600	60	0.020	6000
BCMS451616A750 8A	75	0.010	8000
BCMS451616A101	100	0.020	6000
BCMS451616A121	120	0.020	6000
4532 系列			
BCMS453215A600	60	0.020	6000
BCMS453215A121	120	0.020	6000
BCMS453215A151	150	0.020	6000
BCMS453215B700	70	0.020	6000

TEST EQUIPMENT: HP-4291A IMPEDANCE ANALYZER 測試設備: HP-4291A 阻值分析儀

* Max Echo reserves the rights for revising the content of this catalog without further notification.
鈺鎧保留更改此目錄中任何內容之權利. 而不再另行通知.

MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


BCMS201209A070

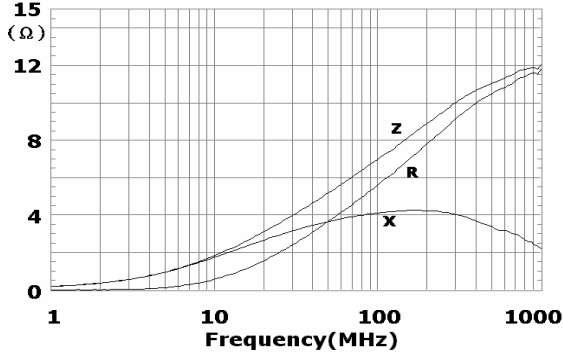


BCMS201209A110

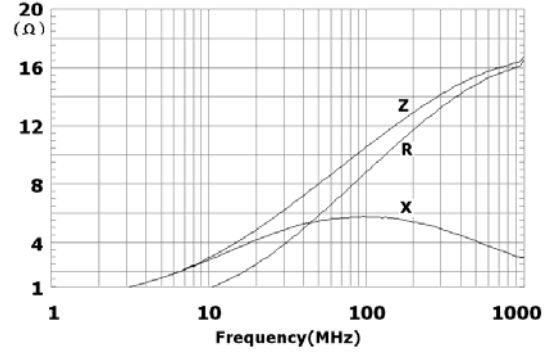


BCMS201209A170

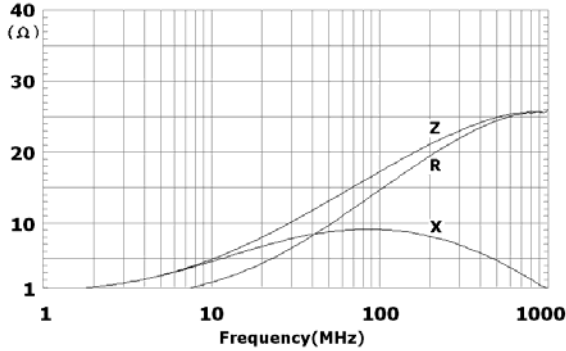


BCMS201209A300

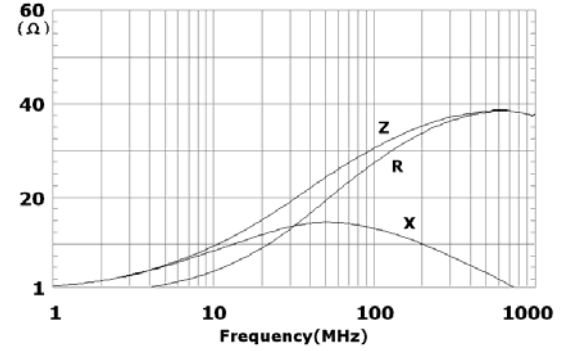


BCMS201209A390RDC008

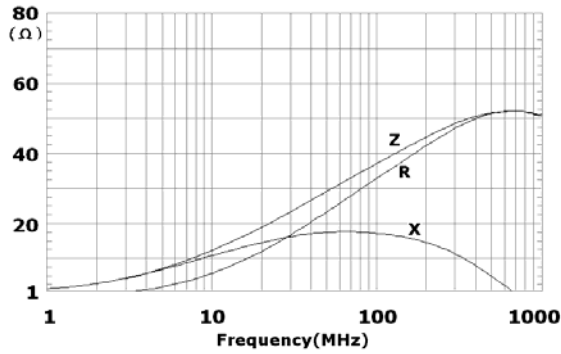


BCMS201209A600

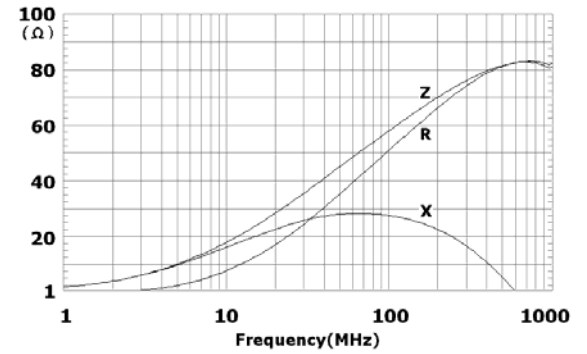

BCMS201209A800

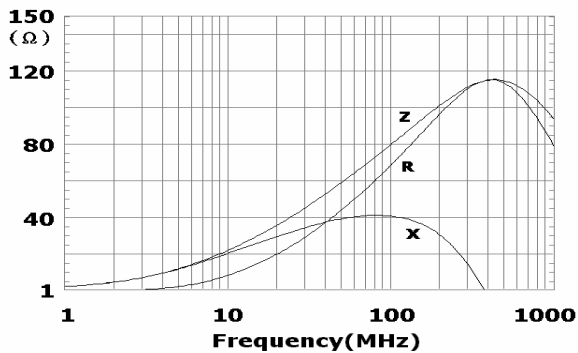

BCMS201209A121

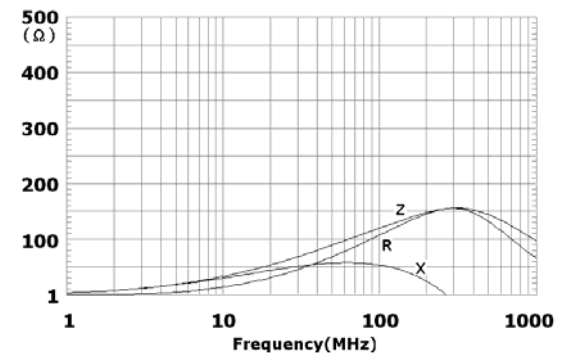

* Max Echo reserves the rights for revising the content of this catalog without further notification.
 鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。

MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X vs. 頻率特性


BCMS321611A310

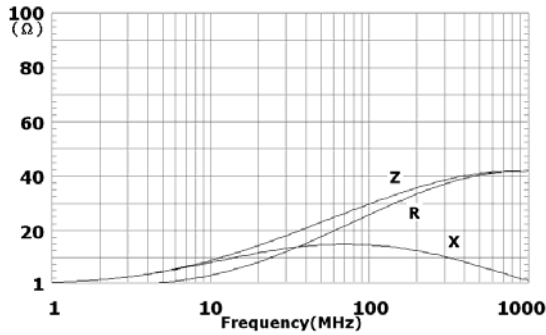


BCMS321611A520

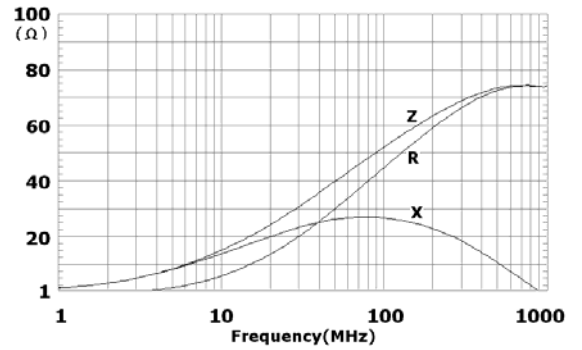


BCMS321611A800 4A

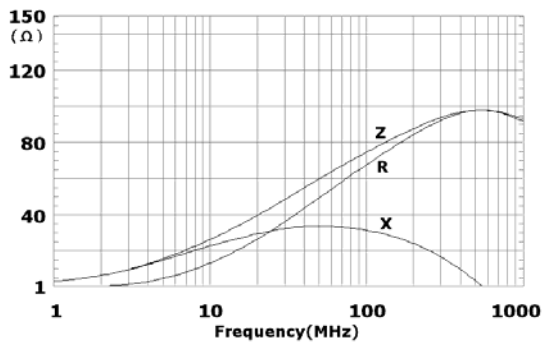


BCMS321611A121 5A

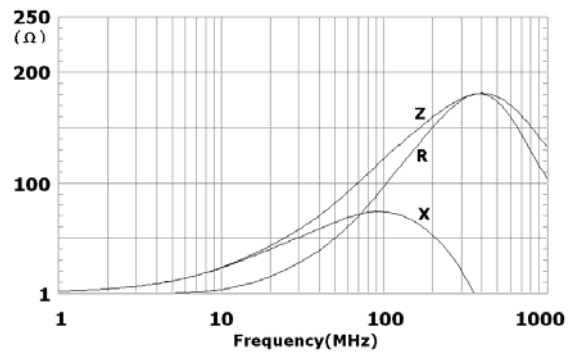


BCMS322513A520

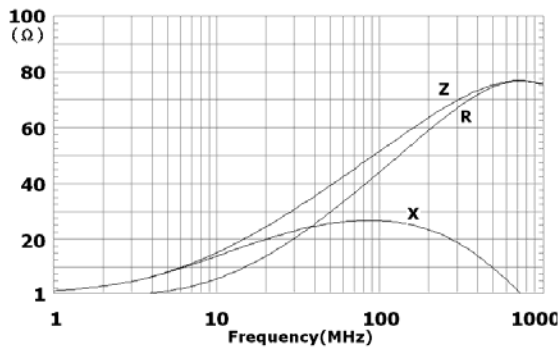


BCMS322513A600

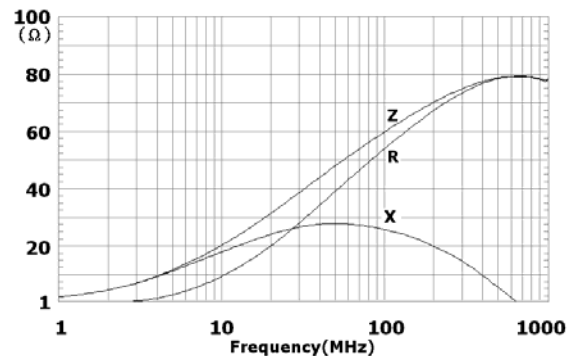

BCMS451616A600

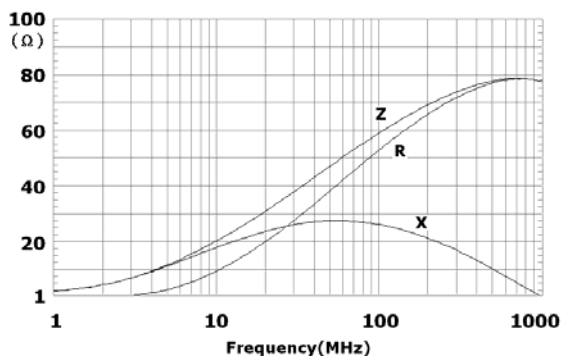

BCMS451616A750 8A

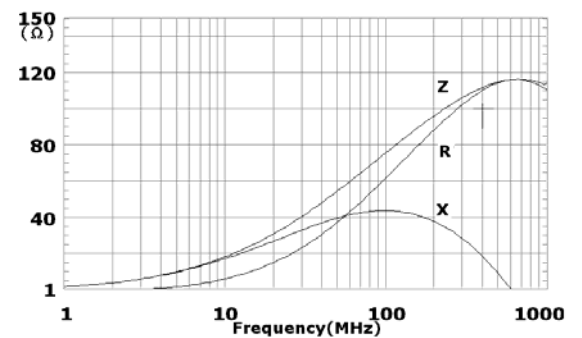

* Max Echo reserves the rights for revising the content of this catalog without further notification.
 鈺鎧保留更改此目錄中任何內容之權利。而不再另行通知。

MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


BCMS454616A101

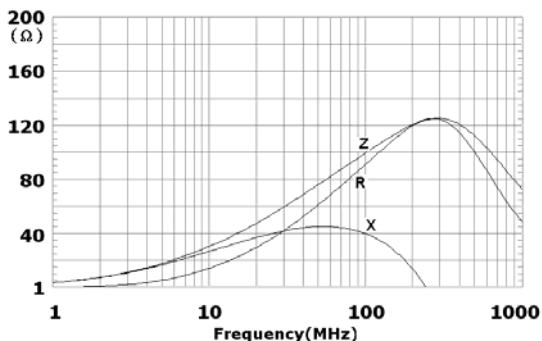


BCMS451616A121

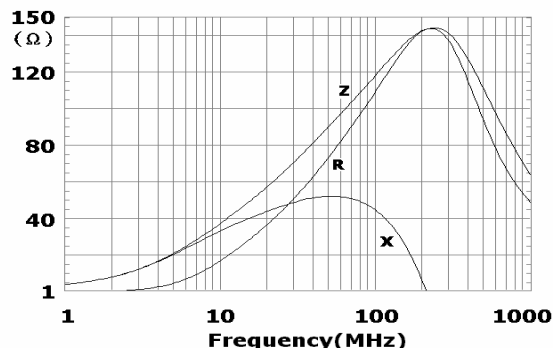


BCMS453215A600

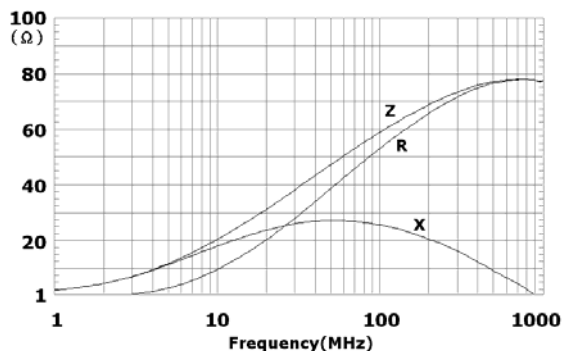


BCMS453215A121

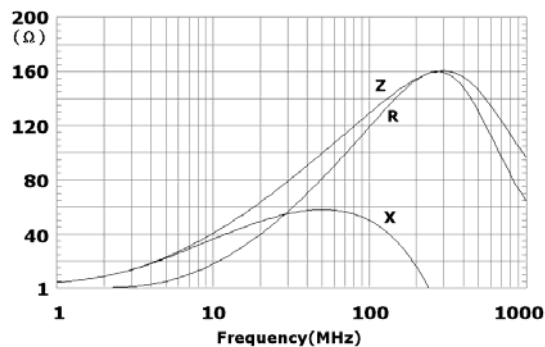

BCMS453215A151

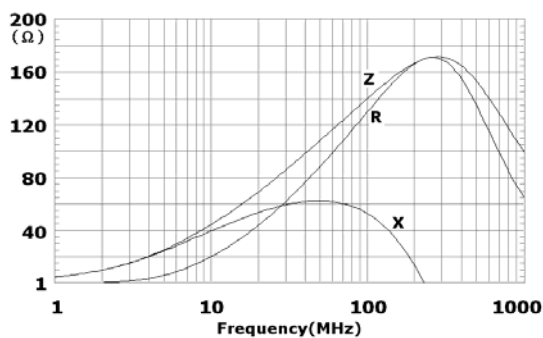

BCMS453215B700

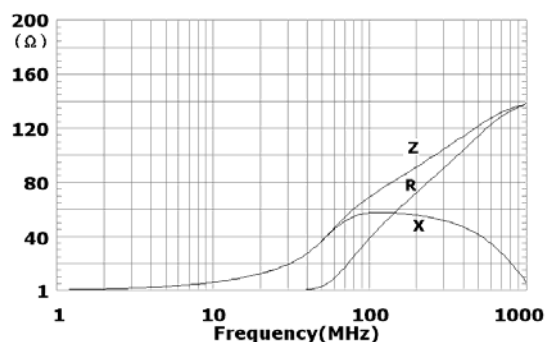

* Max Echo reserves the rights for revising the content of this catalog without further notification.
 鈺鎧保留更改此目錄中任何內容之權利. 而不再另行通知.