

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)




Chip Ferrite Beads BLM15/BLM18/BLM21/BLM31/BLM41 Series

■ Features (BLM_A Series)


The chip ferrite bead BLM series comprises ferrite bead in the shape of a chip. This ferrite bead generates a high impedance which at high frequencies mainly consists of a resistance element. The BLM series is effective in circuits without stable ground lines because the BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. The BLM_A series generates an impedance from the relatively low frequencies. Therefore the BLM_A series is effective in noise suppression in the wide frequency range (30MHz-Several hundred MHz).

■ Equivalent Circuit

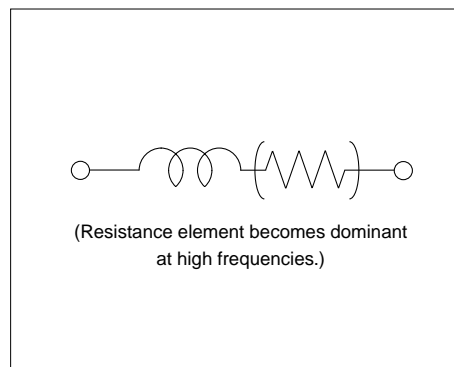


BLM15A Series (0402 Size)

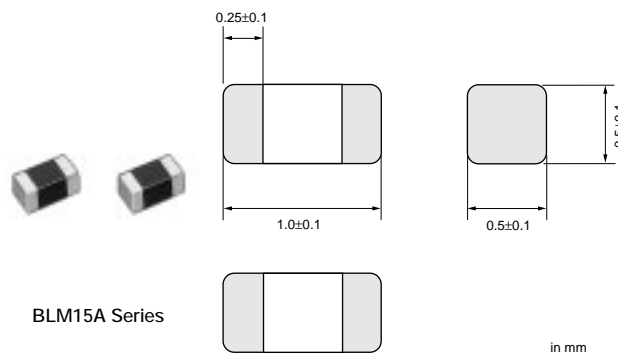

Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM15AG100SN1	10 (Typ.)	1000	0.05	-55 to 125
BLM15AG700SN1	70 (Typ.)	500	0.15	-55 to 125
BLM15AG121SN1	120 ±25%	500	0.25	-55 to 125
BLM15AG221SN1	220 ±25%	300	0.35	-55 to 125
BLM15AG601SN1	600 ±25%	300	0.6	-55 to 125
BLM15AG102SN1	1000 ±25%	200	1.0	-55 to 125


■ Impedance-Frequency (Typical)

BLM15A Series

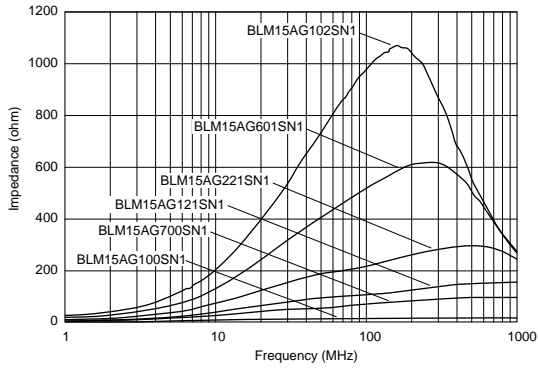


■ Impedance-Frequency Characteristics


BLM15AG100SN1

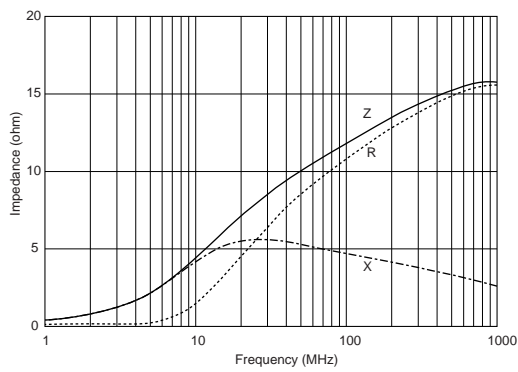


BLM15AG700SN1

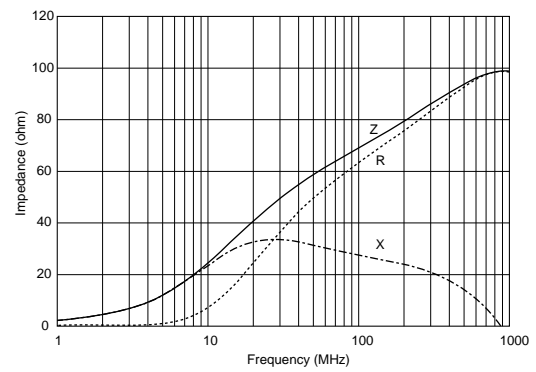


BLM15AG121SN1

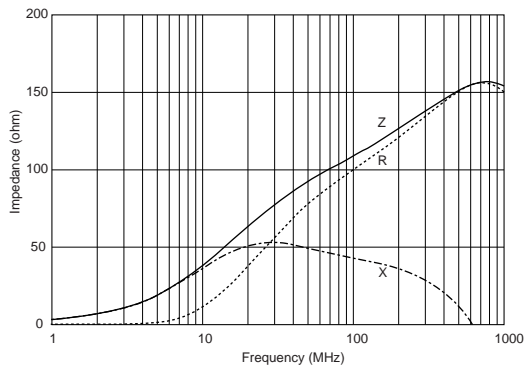


BLM15AG221SN1

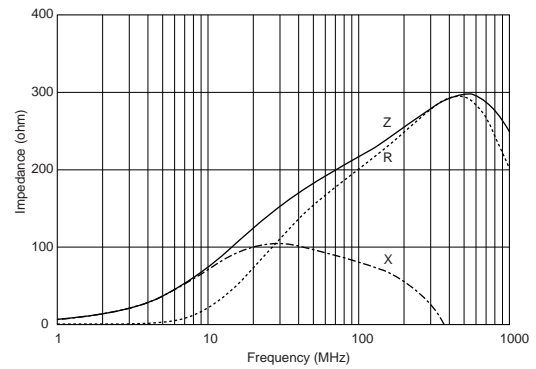


BLM15AG601SN1

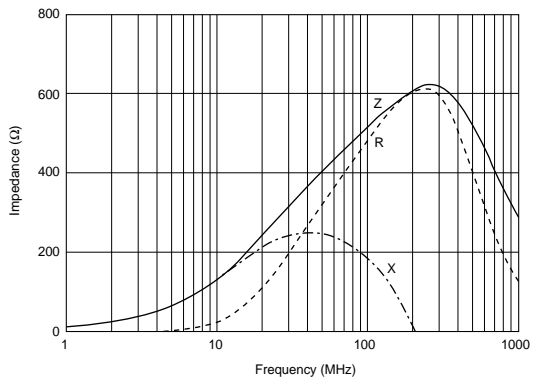

BLM15AG102SN1

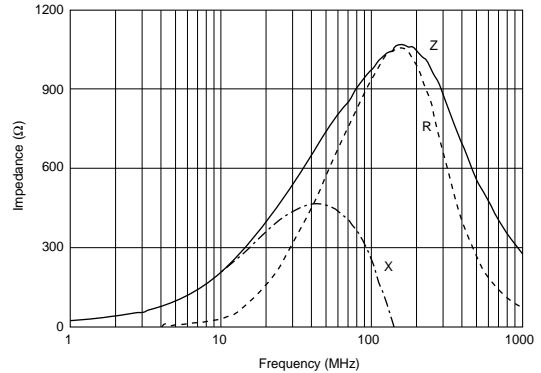


BLM18A Series (0603 Size)


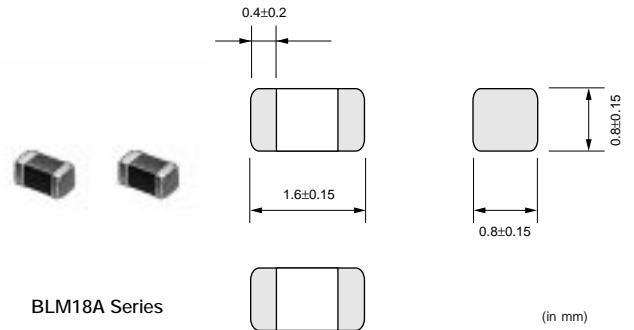


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM18AG121SN1	120 ±25%	200	0.20	-55 to 125
BLM18AG151SN1	150 ±25%	200	0.25	-55 to 125
BLM18AG221SN1	220 ±25%	200	0.30	-55 to 125
BLM18AG331SN1	330 ±25%	200	0.45	-55 to 125
BLM18AG471SN1	470 ±25%	200	0.50	-55 to 125
BLM18AG601SN1	600 ±25%	200	0.50	-55 to 125
BLM18AG102SN1	1000 ±25%	100	0.70	-55 to 125

■ Impedance-Frequency (Typical)

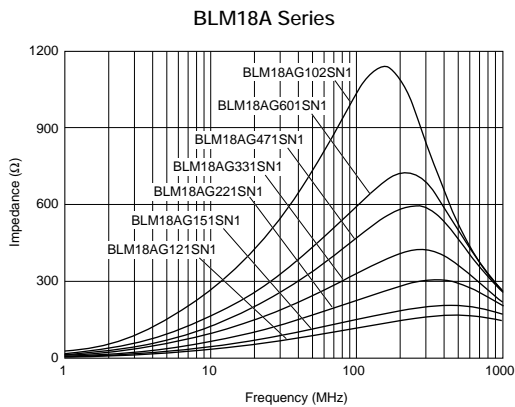

■ Impedance-Frequency Characteristics

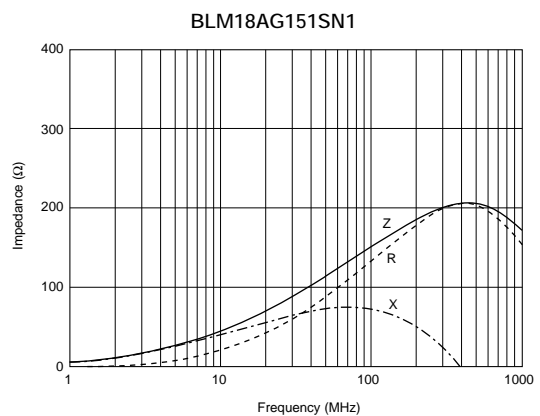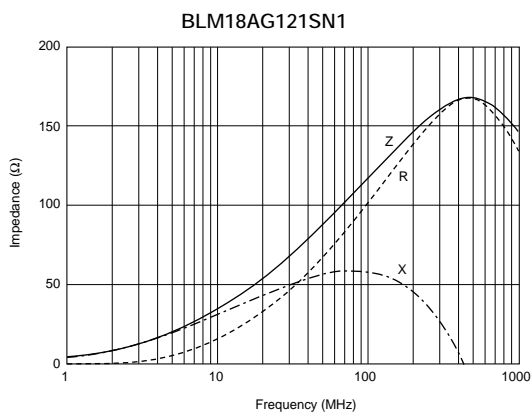


Continued on the following page. ↗

↳ Continued from the preceding page.


■ Impedance-Frequency Characteristics

1


BLM18AG221SN1

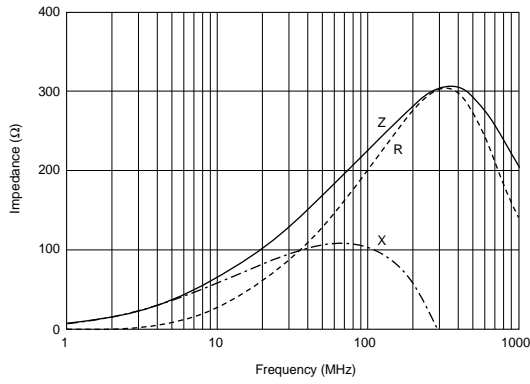


BLM18AG331SN1

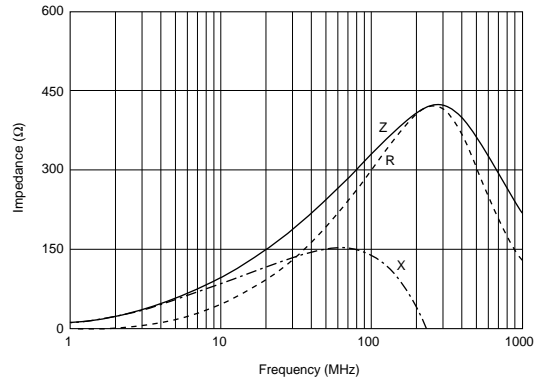


BLM18AG471SN1

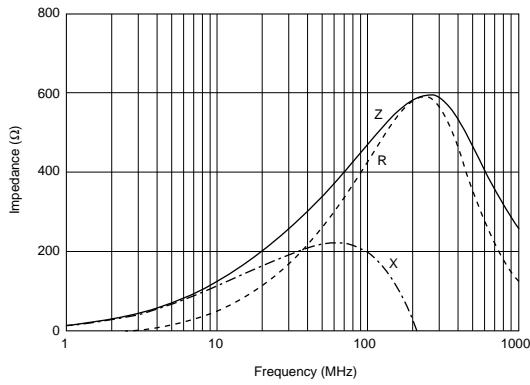


BLM18AG601SN1

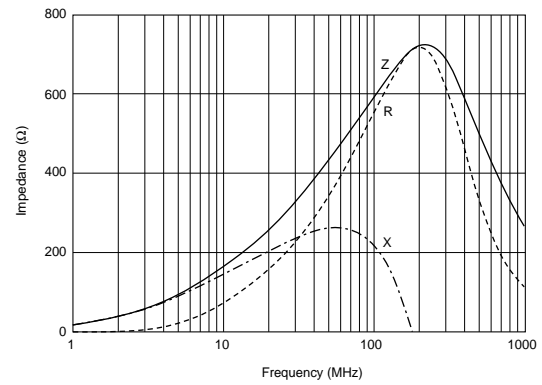

BLM18AG102SN1

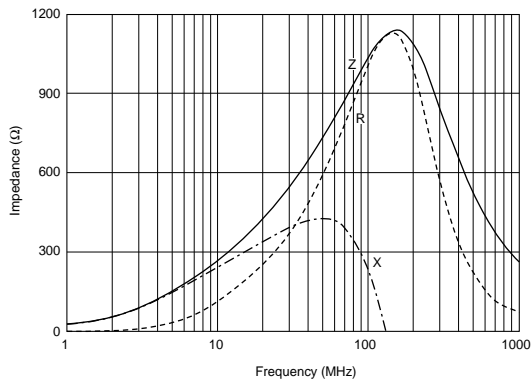


BLM21A Series (0805 Size)


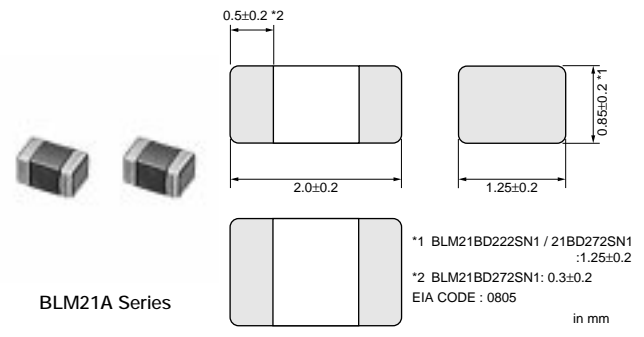


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM21AG121SN1	120 ±25%	200	0.15	-55 to 125
BLM21AG151SN1	150 ±25%	200	0.15	-55 to 125
BLM21AG221SN1	220 ±25%	200	0.20	-55 to 125
BLM21AG331SN1	330 ±25%	200	0.25	-55 to 125
BLM21AJ401SN1	400 ±25%	200	0.85	-55 to 125
BLM21AG471SN1	470 ±25%	200	0.25	-55 to 125
BLM21AG601SN1	600 ±25%	200	0.30	-55 to 125
BLM21AJ601SN1	600 ±25%	200	1.10	-55 to 125
BLM21AG102SN1	1000 ±25%	200	0.45	-55 to 125
BLM21AH102SN1	1000 ±25%	200	0.45	-55 to 85

■ Impedance-Frequency (Typical)

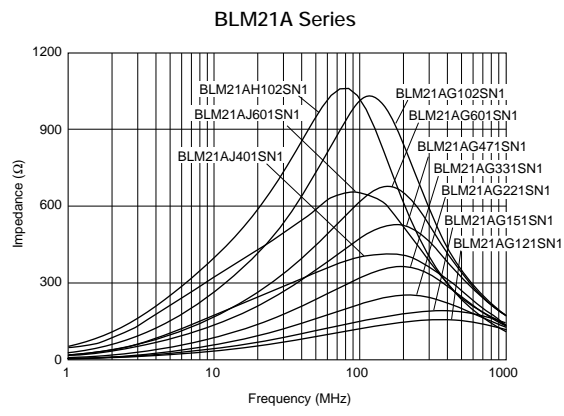

■ Impedance-Frequency Characteristics

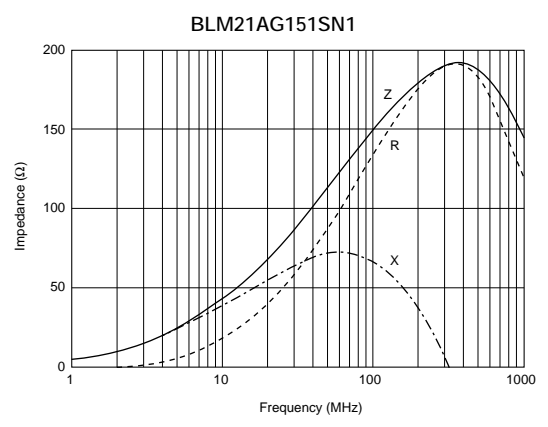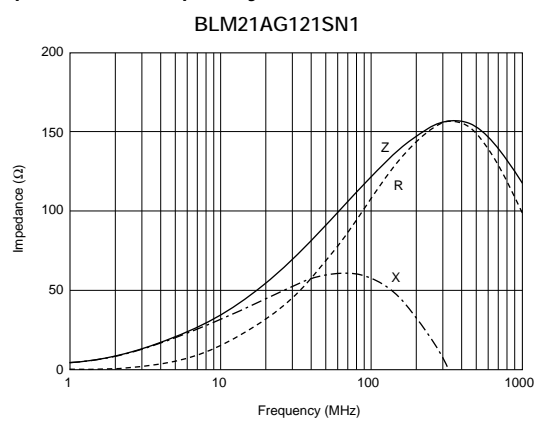


Continued on the following page. ↗

↳ Continued from the preceding page.


■ Impedance-Frequency Characteristics

1


BLM21AG221SN1

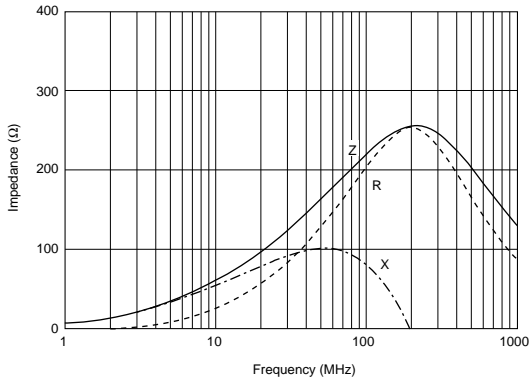


BLM21AG331SN1

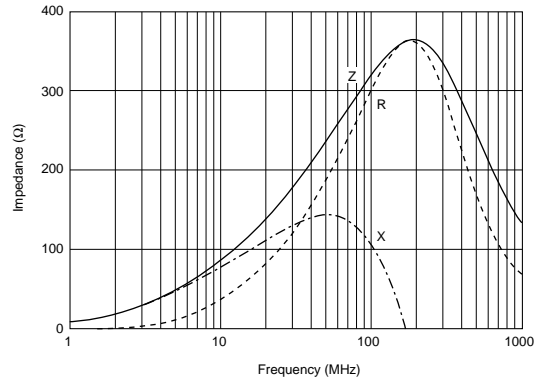


BLM21AJ401SN1

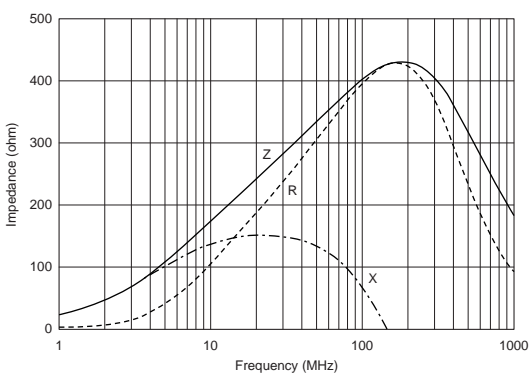


BLM21AG471SN1

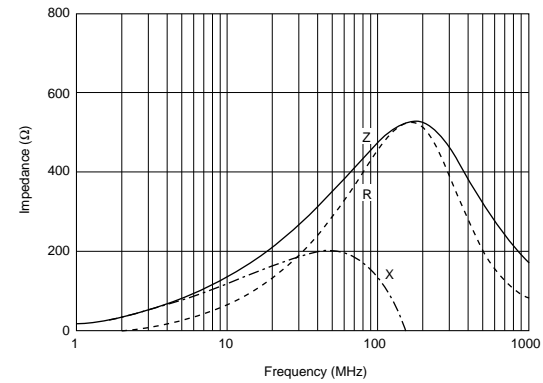


BLM21AG601SN1

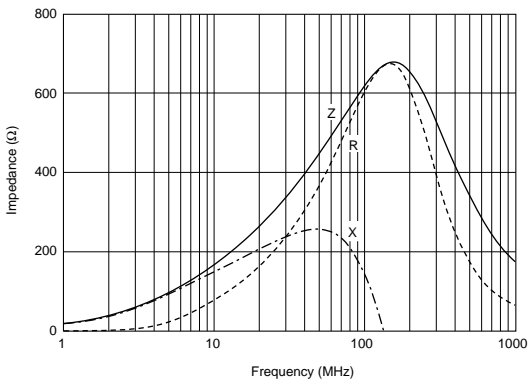


BLM21AJ601SN1

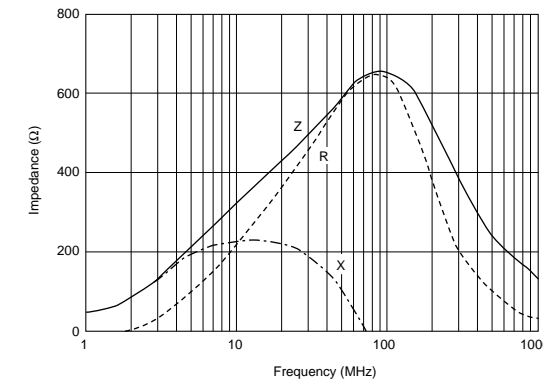


BLM21AG102SN1

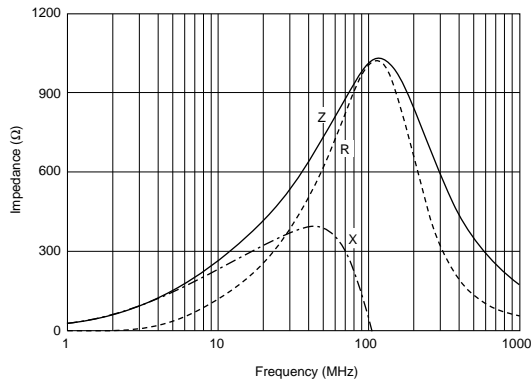

BLM21AH102SN1

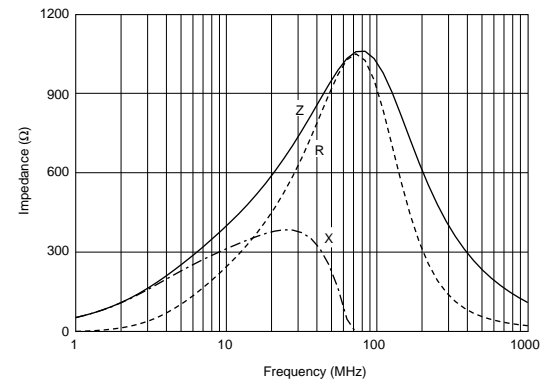


BLM31A Series (1206 Size)



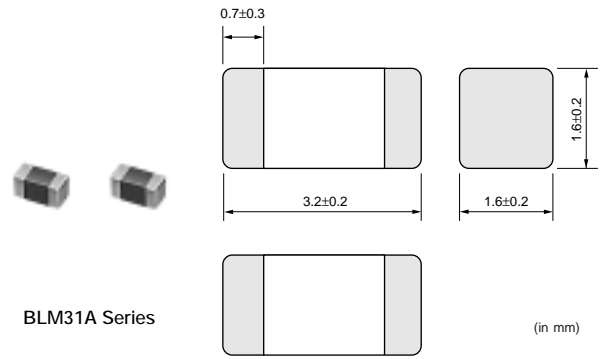


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM31AJ260SN1	26 ±25%	500	0.05	-55 to 125
BLM31AF700SN1	70 ±25%	200	0.15	-55 to 125
BLM31AJ601SN1	600 ±25%	200	0.90	-55 to 125


■ Impedance-Frequency (Typical)

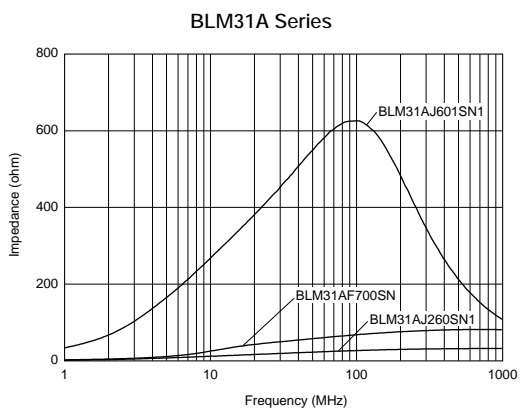

■ Impedance-Frequency Characteristics

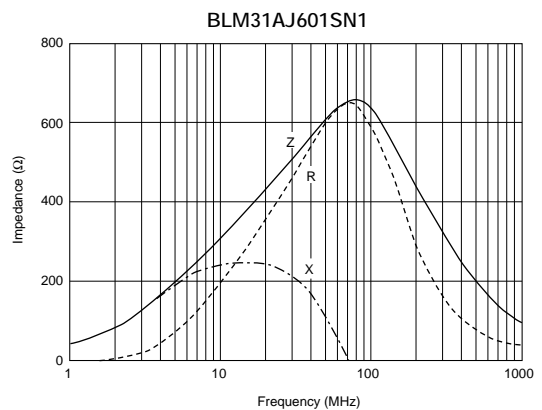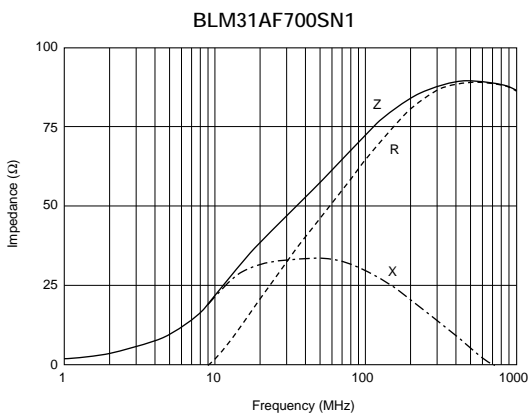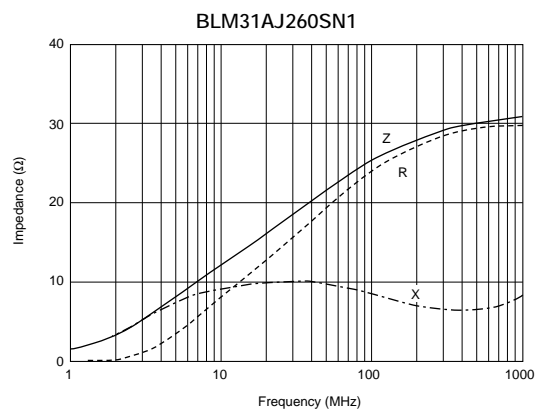


BLM41A Series (1806 Size)


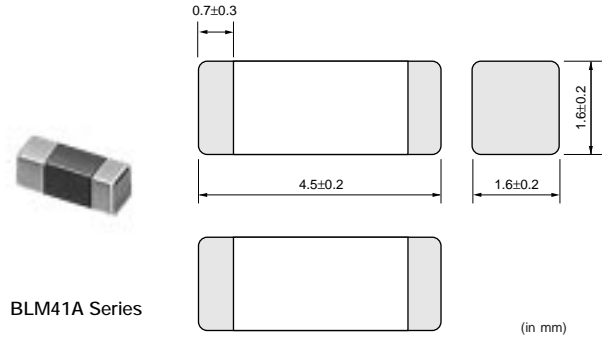


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM41AF800SN1	80 ±25%	500	0.10	-55 to 125
BLM41AF151SN1	150 ±25%	200	0.50	-55 to 125

■ Impedance-Frequency (Typical)

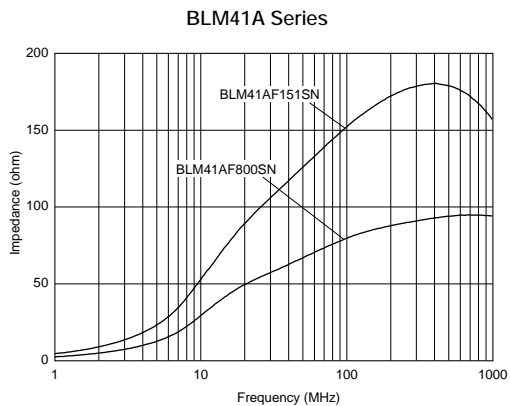

■ Impedance-Frequency Characteristics

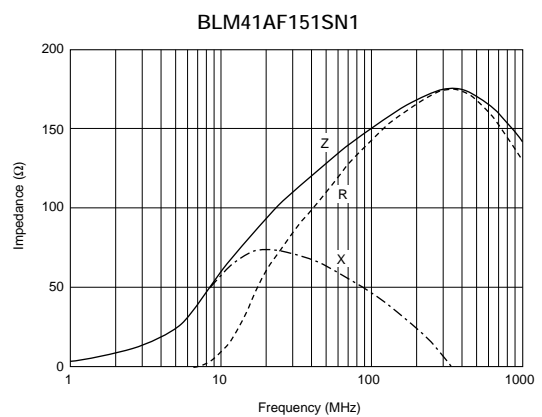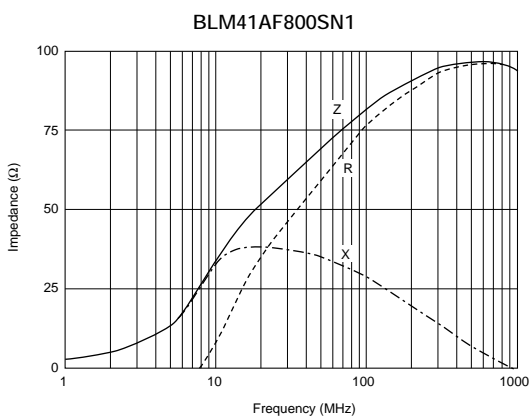


■ Features (BLM_B Series)


The chip ferrite bead BLM series comprises ferrite bead in the shape of a chip. This ferrite bead generates a high impedance which at high frequencies mainly consists of a resistance element. The BLM series is effective in circuits without stable ground lines because the BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. The BLM_B series can minimize attenuation of the signal waveform due to its sharp impedance characteristics. Various impedances are available to match signal frequency.

■ Equivalent Circuit


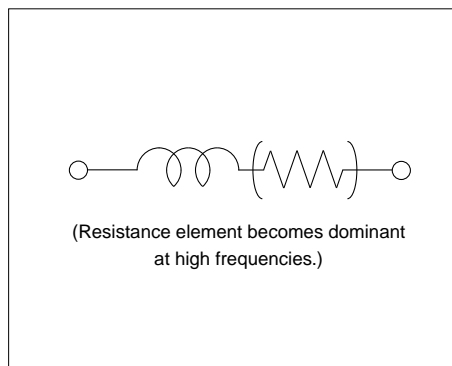


BLM15B Series (0402 Size)

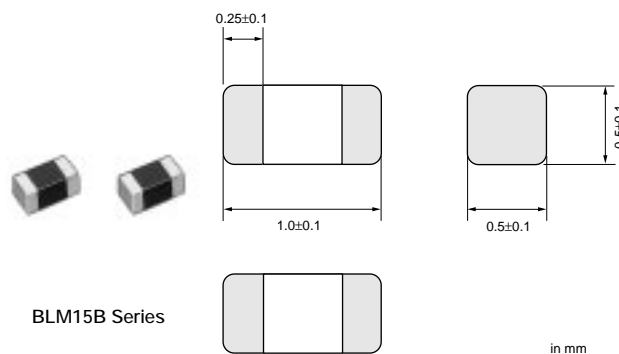

Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM15BB050SN1	5 ±25%	500	0.08	-55 to 125
BLM15BB100SN1	10 ±25%	300	0.10	-55 to 125
BLM15BB220SN1	22 ±25%	300	0.20	-55 to 125
BLM15BB470SN1	47 ±25%	300	0.35	-55 to 125
BLM15BB750SN1	75 ±25%	300	0.40	-55 to 125
BLM15BB121SN1	120 ±25%	300	0.55	-55 to 125
BLM15BB221SN1	220 ±25%	200	0.80	-55 to 125
BLM15BD471SN1	470 ±25%	200	0.60	-55 to 125
BLM15BD601SN1	600 ±25%	200	0.65	-55 to 125
BLM15BD102SN1	1000 ±25%	200	0.90	-55 to 125

■ Impedance-Frequency (Typical)

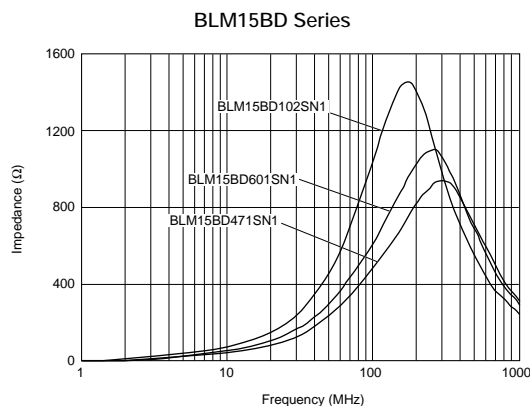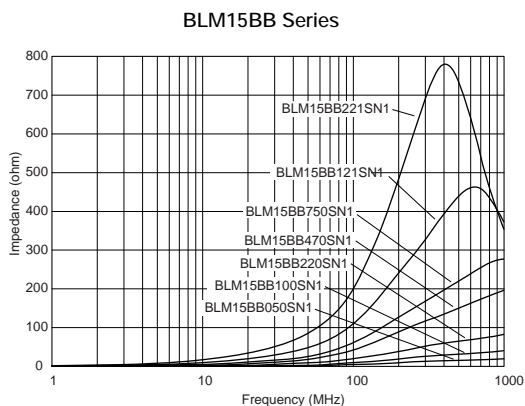


Continued on the following page. ↗


Continued from the preceding page.

Impedance-Frequency Characteristics


BLM15BB050SN1

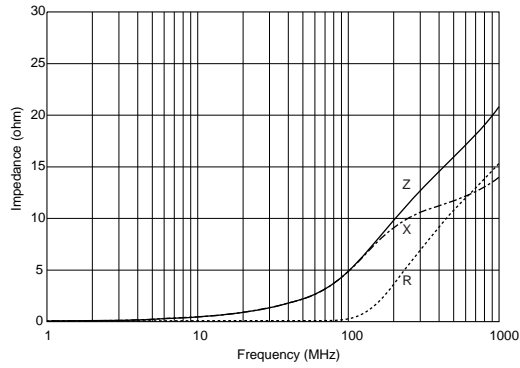


BLM15BB100SN1

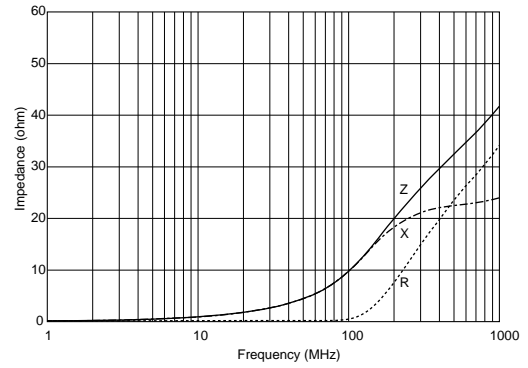


BLM15BB220SN1

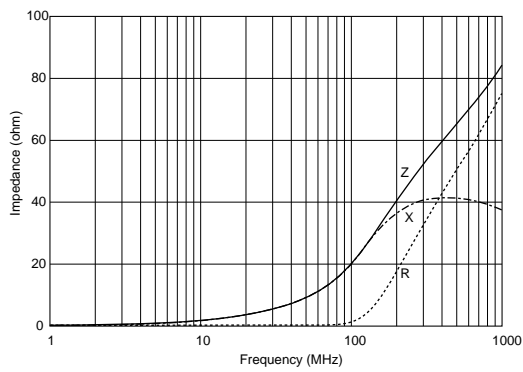


BLM15BB470SN1

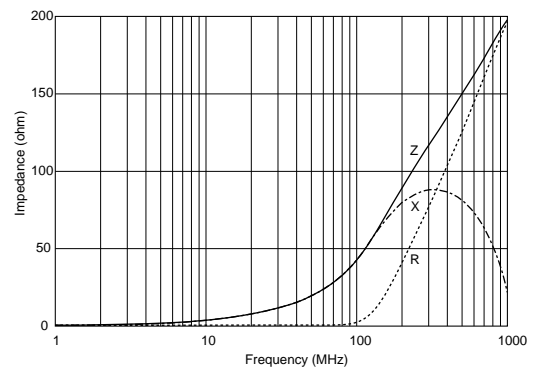


BLM15BB750SN1

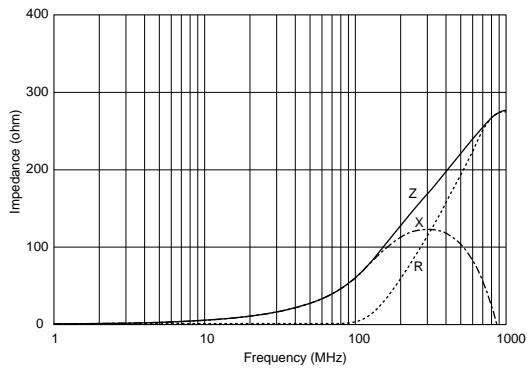


BLM15BB121SN1

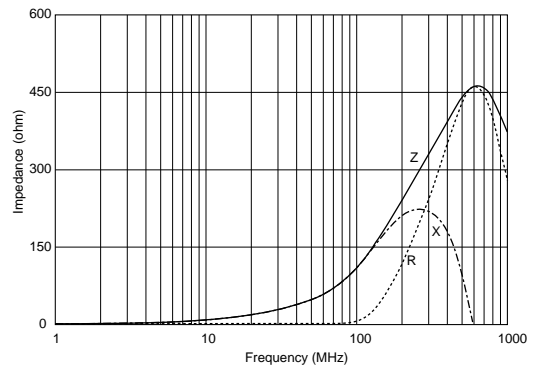

BLM15BB221SN1

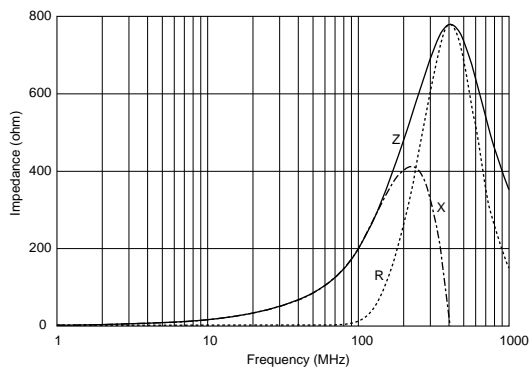

BLM15BD471SN1


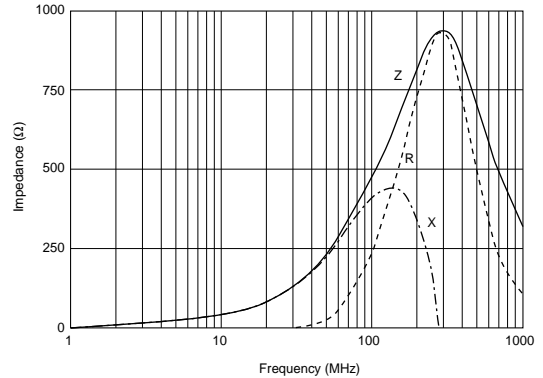


Continued on the following page. ↗


Continued from the preceding page.

1

Impedance-Frequency Characteristics

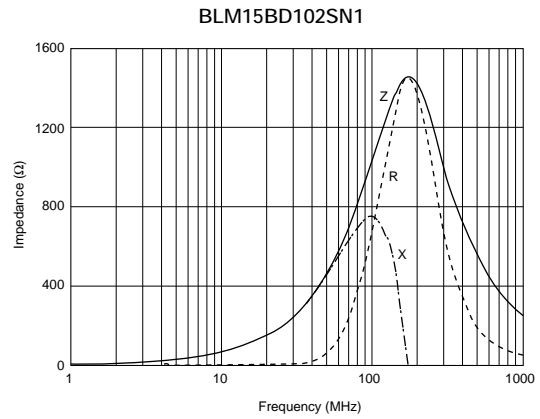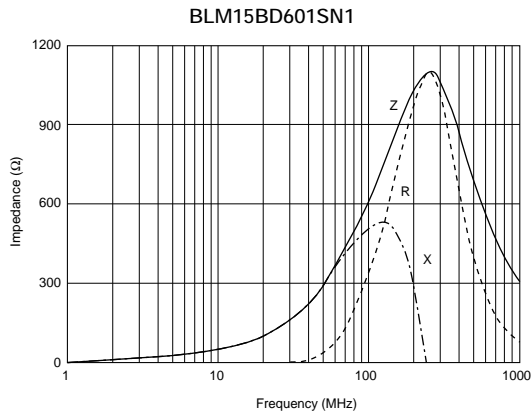

BLM18B Series (0603 Size)

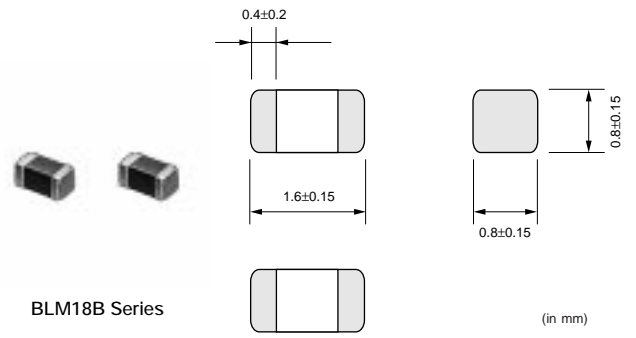

Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM18BA050SN1	5 ±25%	500	0.20	-55 to 125
BLM18BB050SN1	5 ±25%	700	0.10	-55 to 125
BLM18BA100SN1	10 ±25%	500	0.25	-55 to 125
BLM18BB100SN1	10 ±25%	500	0.15	-55 to 125
BLM18BA220SN1	22 ±25%	500	0.35	-55 to 125
BLM18BB220SN1	22 ±25%	500	0.25	-55 to 125
BLM18BA470SN1	47 ±25%	300	0.55	-55 to 125
BLM18BB470SN1	47 ±25%	500	0.30	-55 to 125
BLM18BB600SN1	60 ±25%	200	0.35	-55 to 125
BLM18BA750SN1	75 ±25%	300	0.70	-55 to 125
BLM18BB750SN1	75 ±25%	200	0.35	-55 to 125
BLM18BA121SN1	120 ±25%	200	0.90	-55 to 125
BLM18BB121SN1	120 ±25%	200	0.50	-55 to 125
BLM18BD121SN1	120 ±25%	200	0.40	-55 to 125
BLM18BB141SN1	140 ±25%	200	0.55	-55 to 125
BLM18BB151SN1	150 ±25%	200	0.55	-55 to 125
BLM18BD151SN1	150 ±25%	200	0.40	-55 to 125
BLM18BB221SN1	220 ±25%	200	0.65	-55 to 125
BLM18BD221SN1	220 ±25%	200	0.45	-55 to 125
BLM18BB331SN1	330 ±25%	200	0.75	-55 to 125
BLM18BD331SN1	330 ±25%	200	0.50	-55 to 125
BLM18BD421SN1	420 ±25%	200	0.55	-55 to 125
BLM18BB471SN1	470 ±25%	50	1.00	-55 to 125
BLM18BD471SN1	470 ±25%	200	0.55	-55 to 125
BLM18BD601SN1	600 ±25%	200	0.65	-55 to 125
BLM18BD102SN1	1000 ±25%	100	0.85	-55 to 125
BLM18BD152SN1	1500 ±25%	50	1.20	-55 to 125
BLM18BD182SN1	1800 ±25%	50	1.50	-55 to 125






Continued on the following page. ↗

Continued from the preceding page.

Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM18BD222SN1	2200 ±25%	50	1.50	-55 to 125
BLM18BD252SN1	2500 ±25%	50	1.50	-55 to 125


Rated current is 6A for taping type.

■ Impedance-Frequency (Typical)

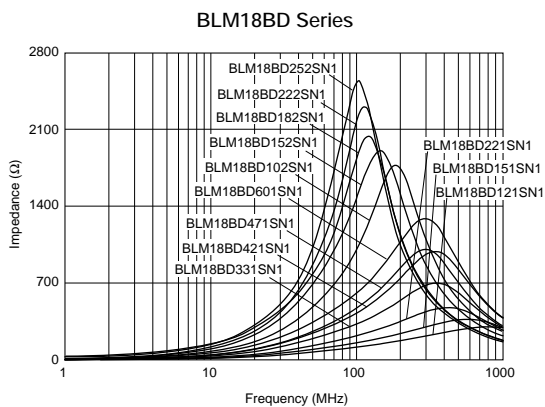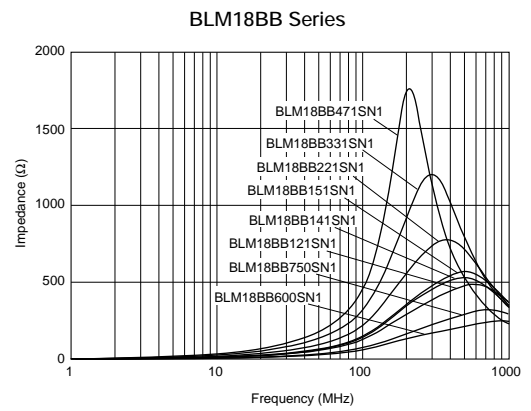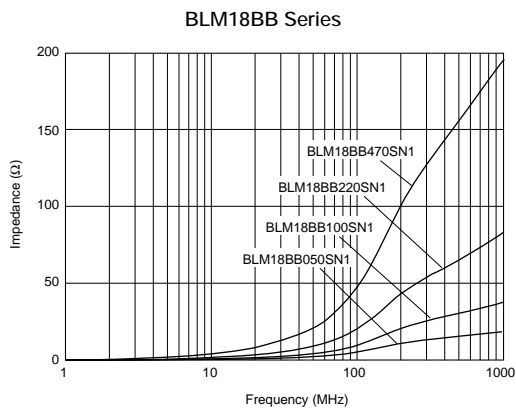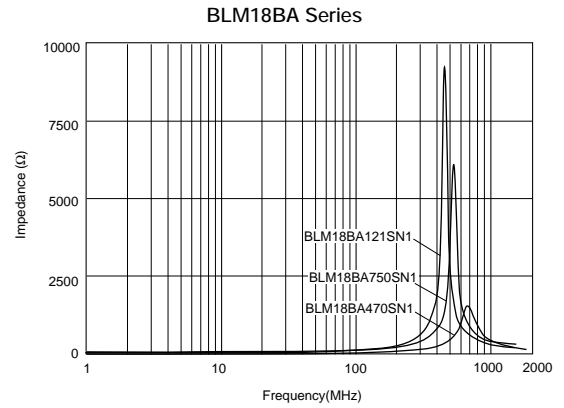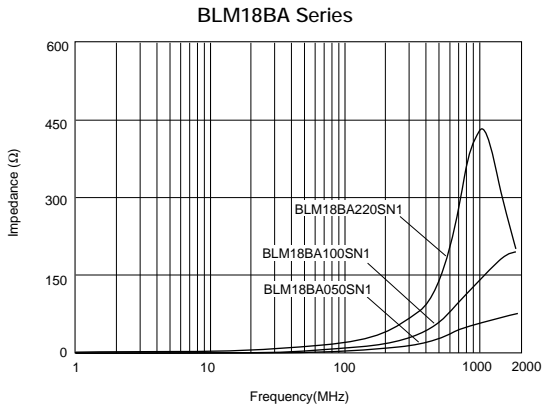


■ Impedance-Frequency Characteristics


BLM18BA050SN1

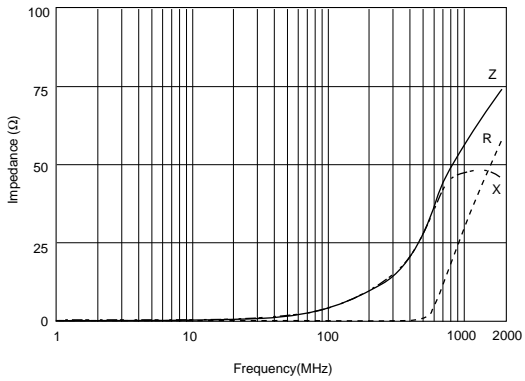


BLM18BB050SN1

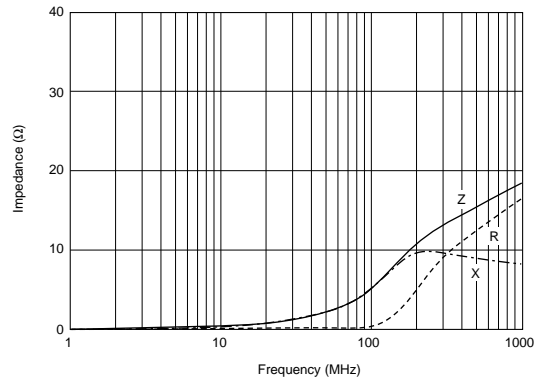


BLM18BA100SN1

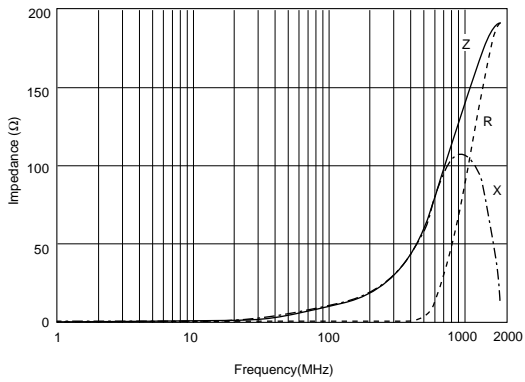


BLM18BB100SN1

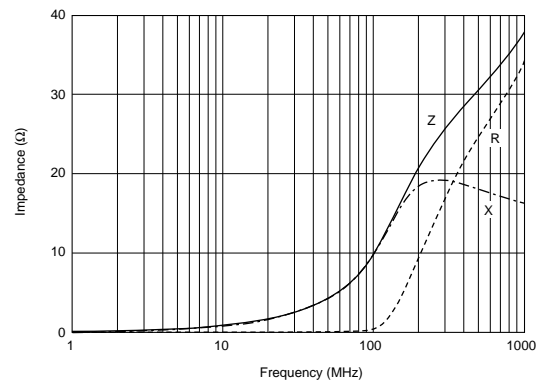


BLM18BA220SN1

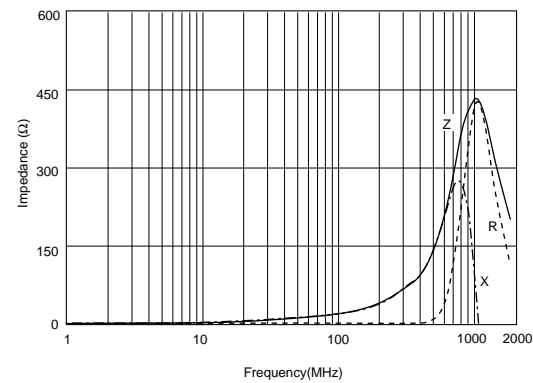


BLM18BB220SN1

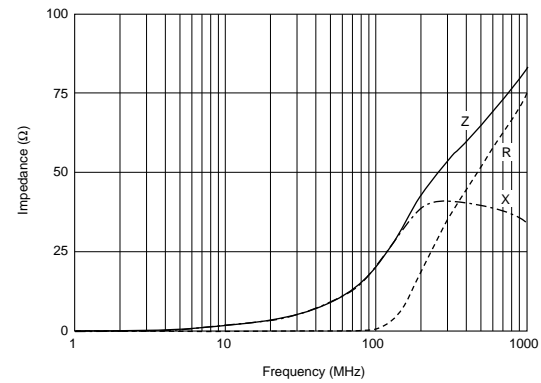

BLM18BA470SN1

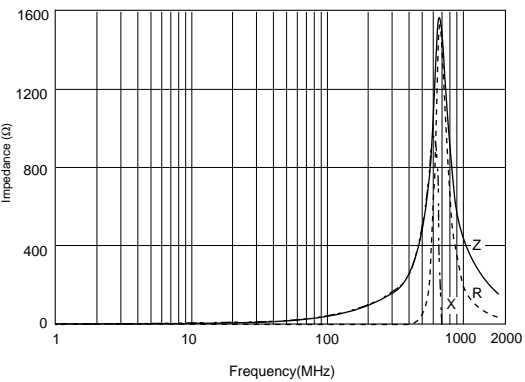

BLM18BB470SN1

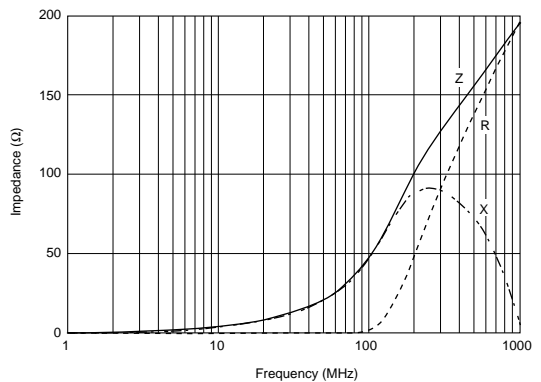


Continued on the following page. ↗


Continued from the preceding page.

Impedance-Frequency Characteristics


BLM18BB600SN1

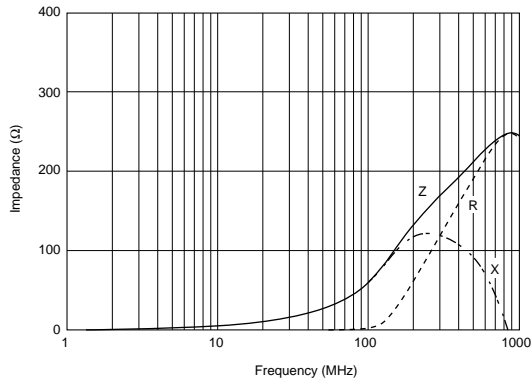


BLM18BA750SN1

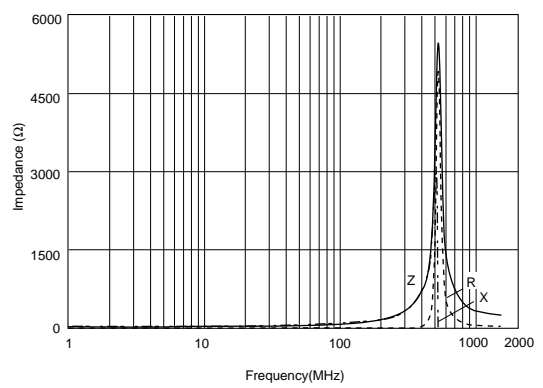


BLM18BB750SN1

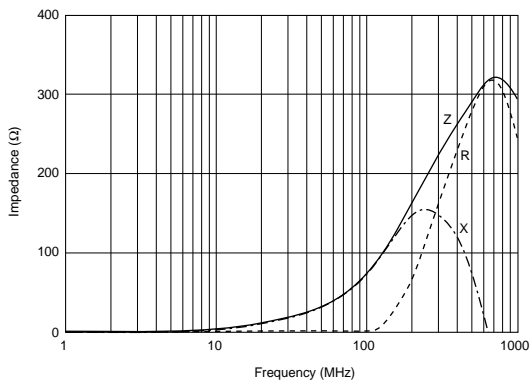


BLM18BA121SN1

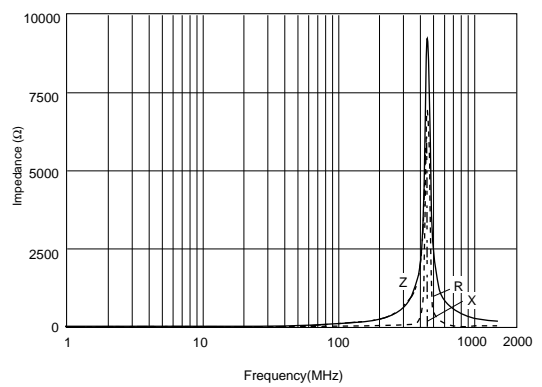


BLM18BB121SN1

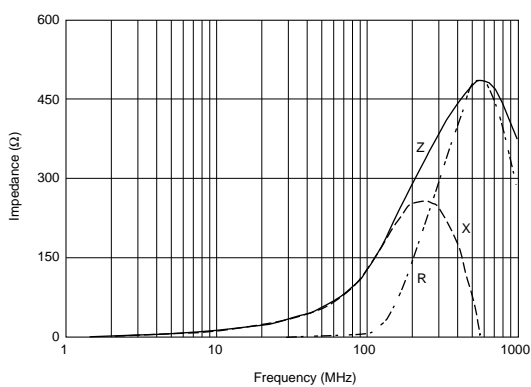


BLM18BD121SN1

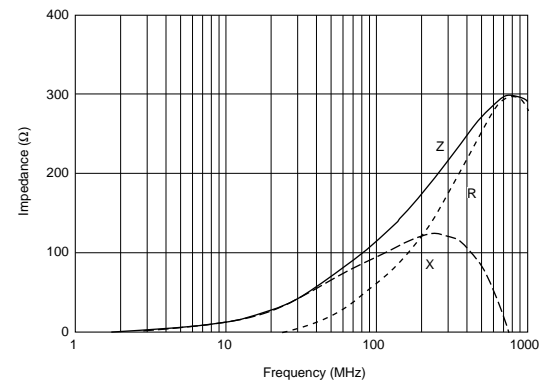

BLM18BB141SN1

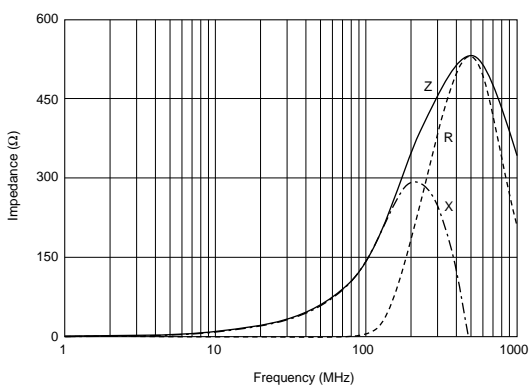









BLM18BB151SN1

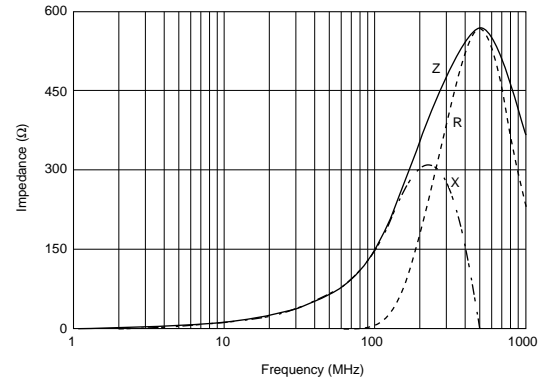

Continued on the following page. ↗

Continued from the preceding page.







Impedance-Frequency Characteristics

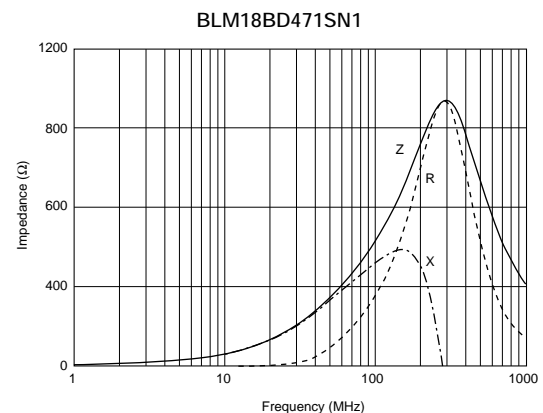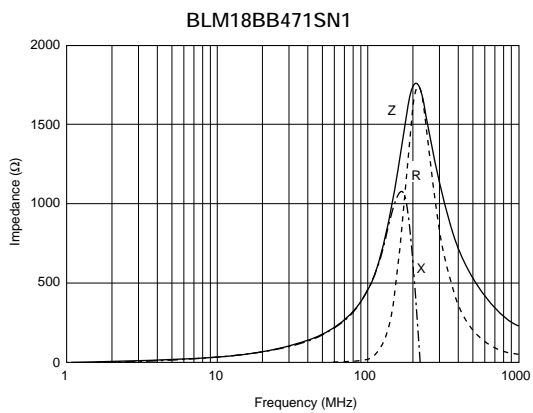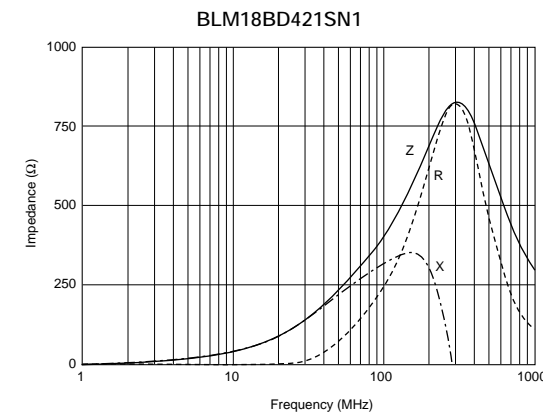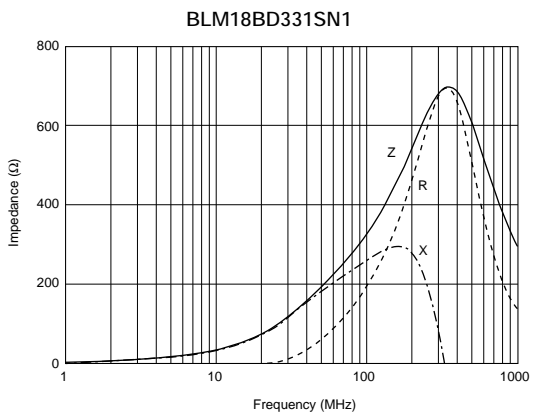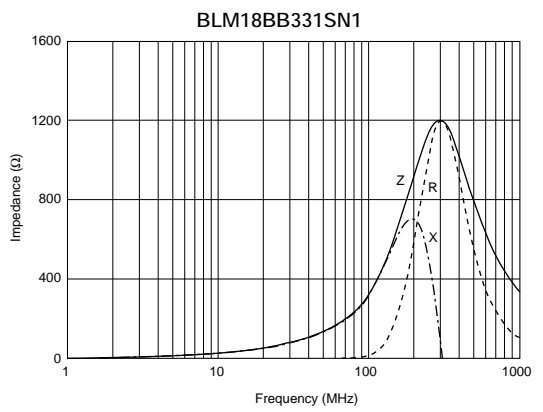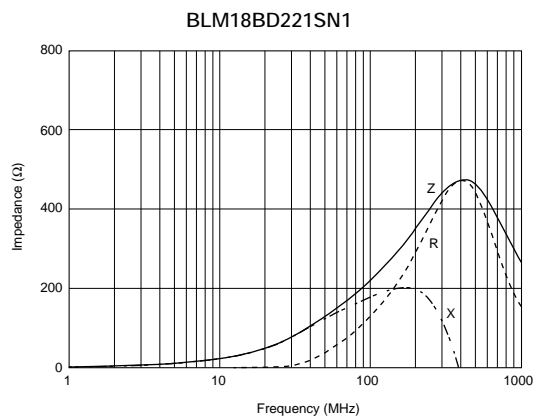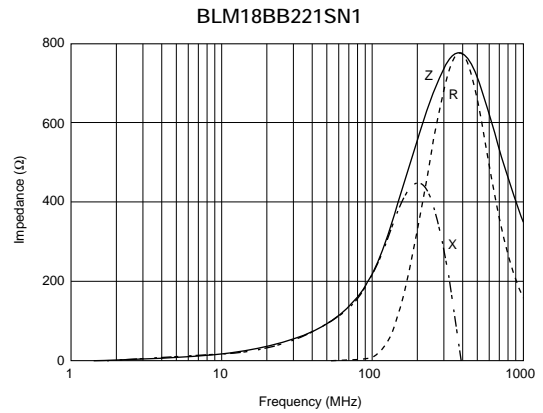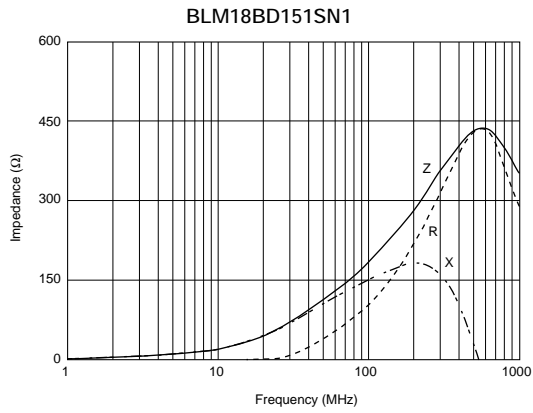


Continued from the preceding page.

Impedance-Frequency Characteristics

1

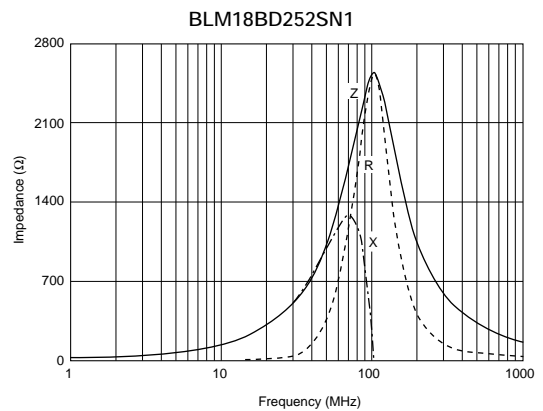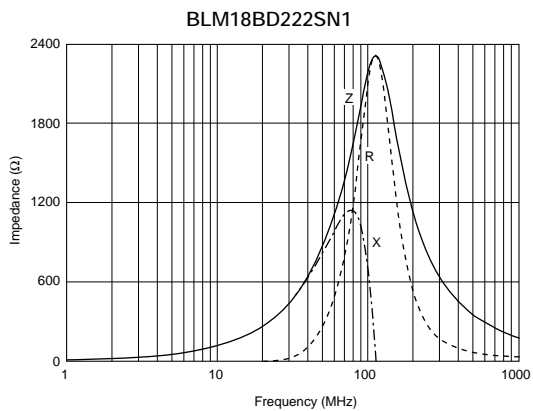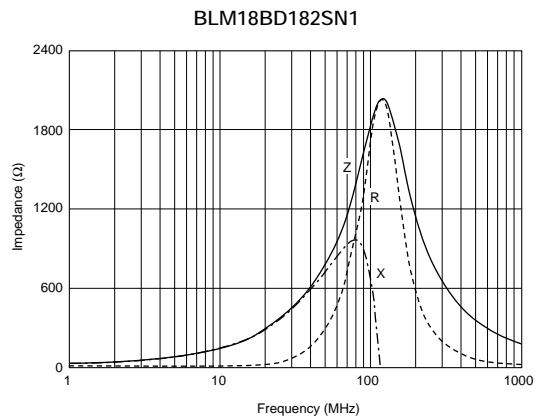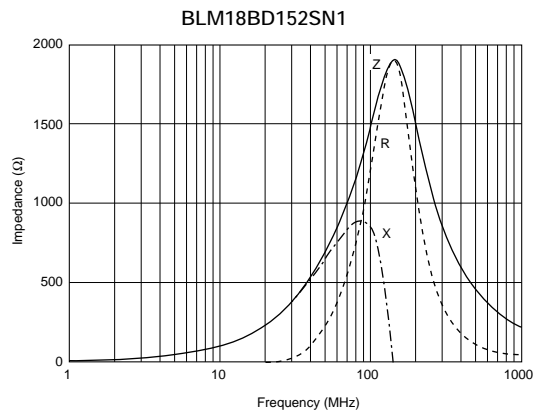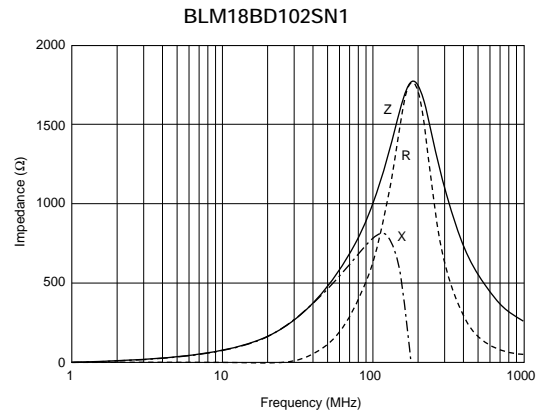
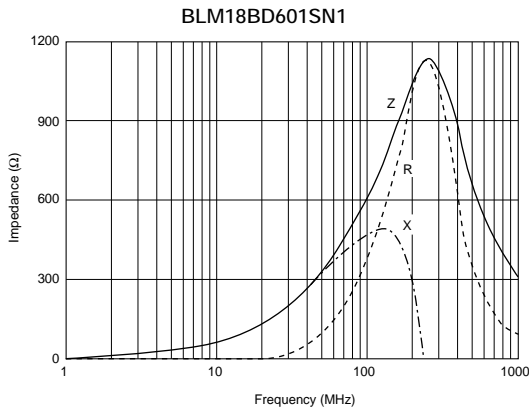


BLM21B Series (0805 Size)

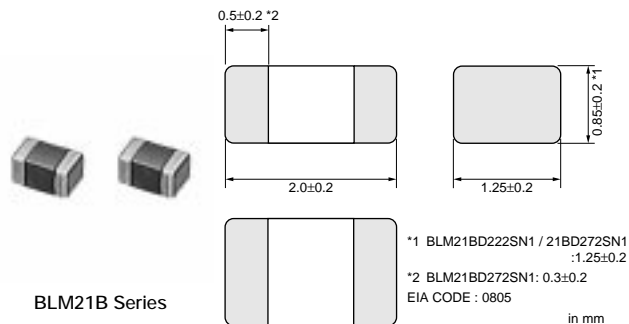

Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM21BB050SN1	5 ±25%	500	0.07	-55 to 125
BLM21BB600SN1	60 ±25%	200	0.20	-55 to 125
BLM21BB750SN1	75 ±25%	200	0.25	-55 to 125
BLM21BB121SN1	120 ±25%	200	0.25	-55 to 125
BLM21BD121SN1	120 ±25%	200	0.25	-55 to 125
BLM21BB151SN1	150 ±25%	200	0.25	-55 to 125
BLM21BD151SN1	150 ±25%	200	0.25	-55 to 125
BLM21BB201SN1	200 ±25%	200	0.35	-55 to 125
BLM21BB221SN1	220 ±25%	200	0.35	-55 to 125
BLM21BD221SN1	220 ±25%	200	0.25	-55 to 125
BLM21BB331SN1	330 ±25%	200	0.40	-55 to 125
BLM21BD331SN1	330 ±25%	200	0.30	-55 to 125
BLM21BD421SN1	420 ±25%	200	0.30	-55 to 125
BLM21BB471SN1	470 ±25%	200	0.45	-55 to 125
BLM21BD471SN1	470 ±25%	200	0.35	-55 to 125
BLM21BD601SN1	600 ±25%	200	0.35	-55 to 125
BLM21BD751SN1	750 ±25%	200	0.40	-55 to 125
BLM21BD102SN1	1000 ±25%	200	0.40	-55 to 125
BLM21BD152SN1	1500 ±25%	200	0.45	-55 to 125
BLM21BD182SN1	1800 ±25%	200	0.50	-55 to 125
BLM21BD222TN1	2200 ±25%	200	0.60	-55 to 125
BLM21BD222SN1	2250 (Typ.)	200	0.60	-55 to 125
BLM21BD272SN1	2700 ±25%	200	0.80	-55 to 125









■ Impedance-Frequency (Typical)

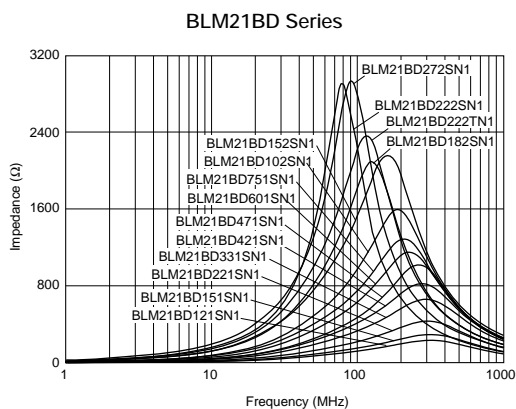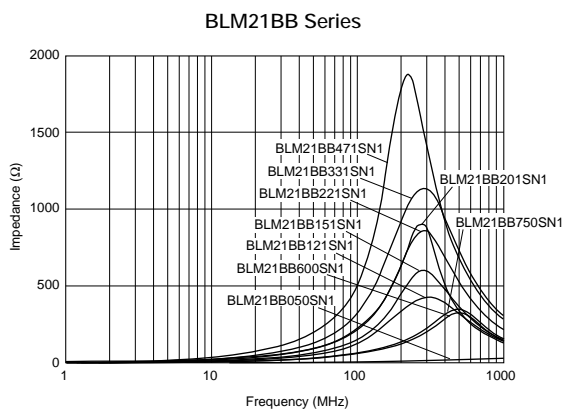

Continued on the following page. ↗

Continued from the preceding page.

Impedance-Frequency Characteristics

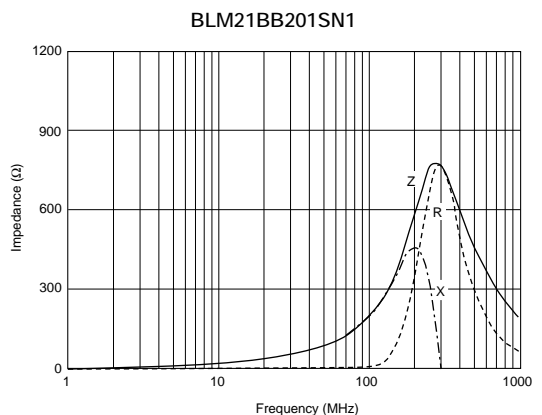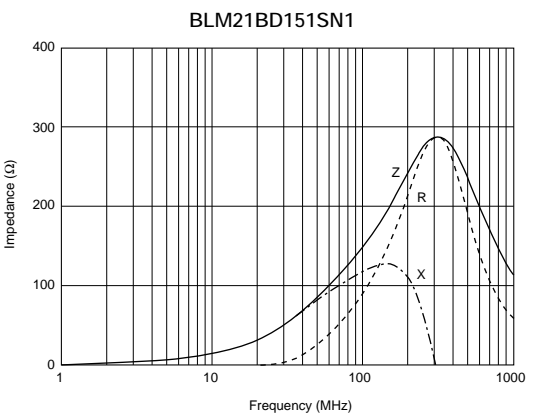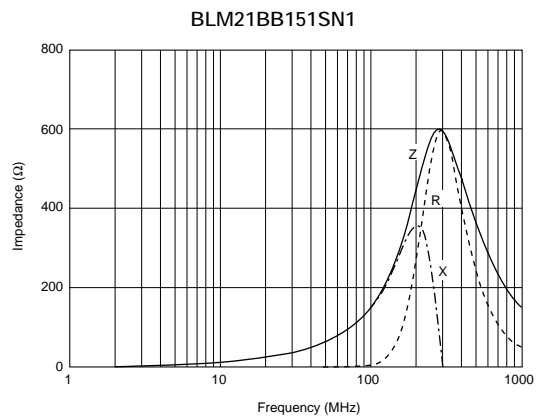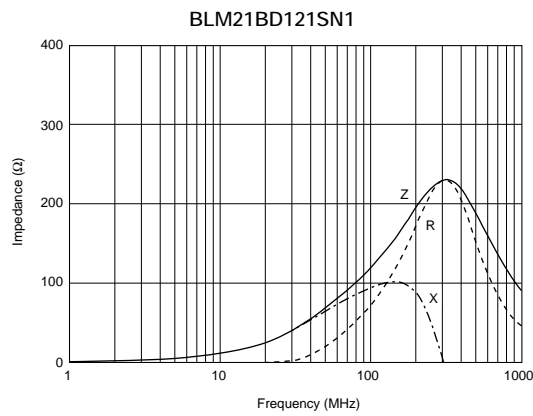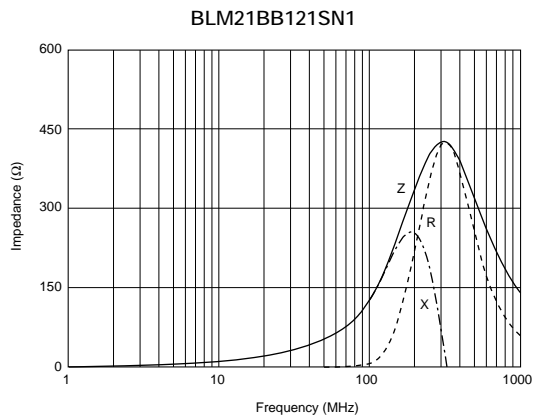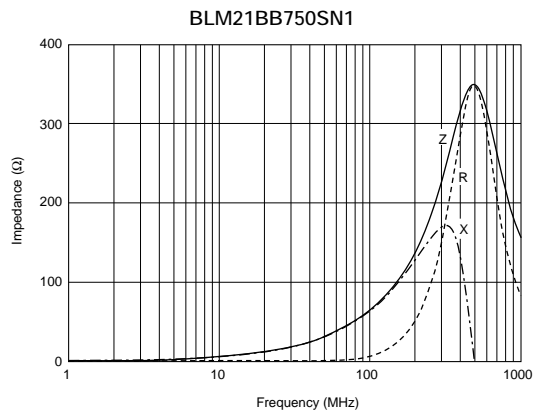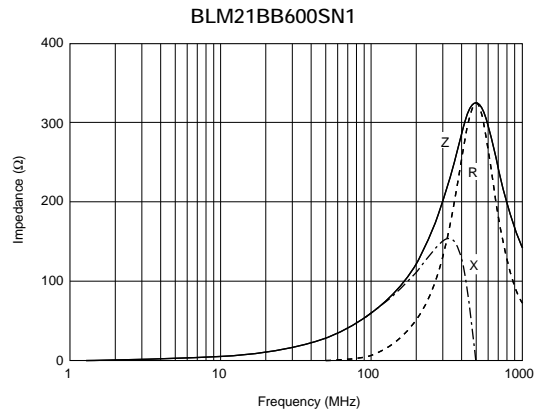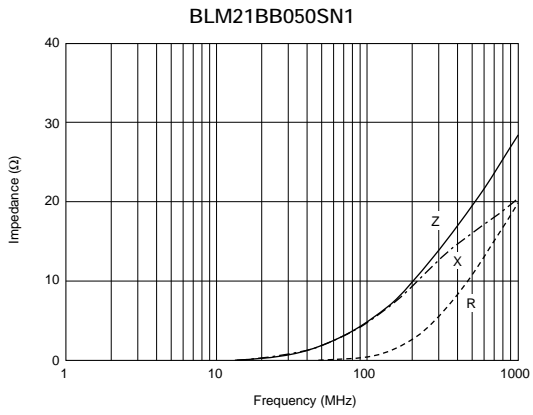


Continued on the following page. ↗


Continued from the preceding page.

Impedance-Frequency Characteristics


BLM21BB221SN1

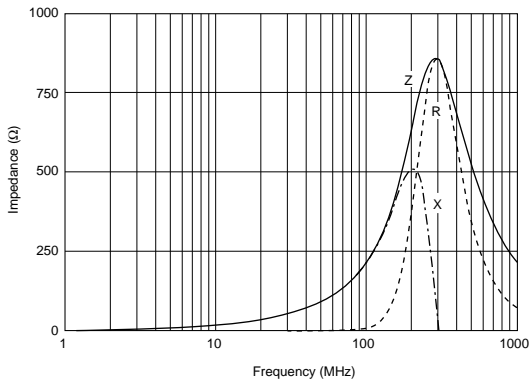


BLM21BD221SN1

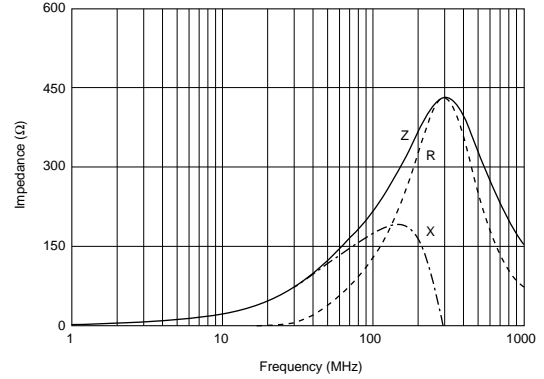


BLM21BB331SN1

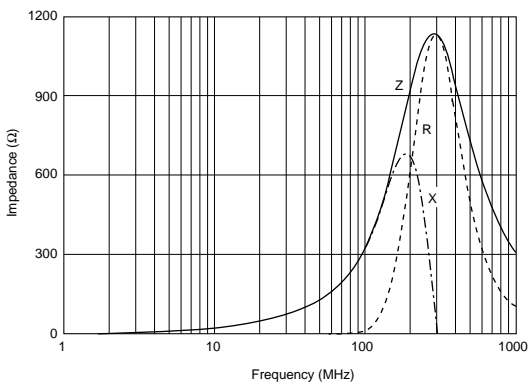


BLM21BD331SN1

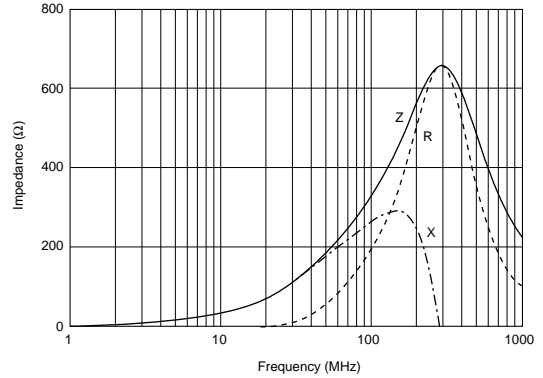


BLM21BD421SN1

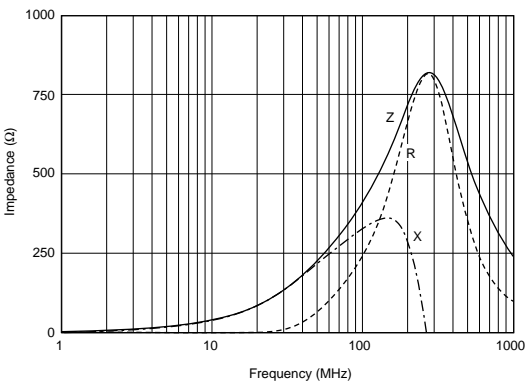


BLM21BB471SN1

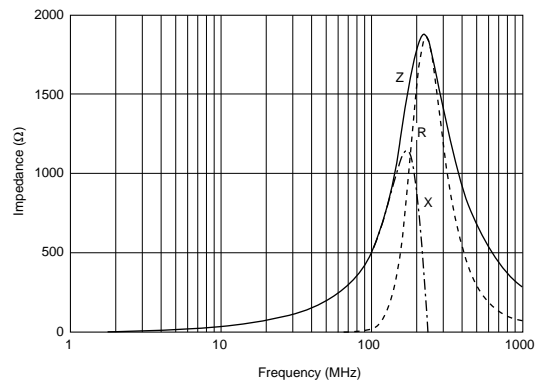

BLM21BD471SN1

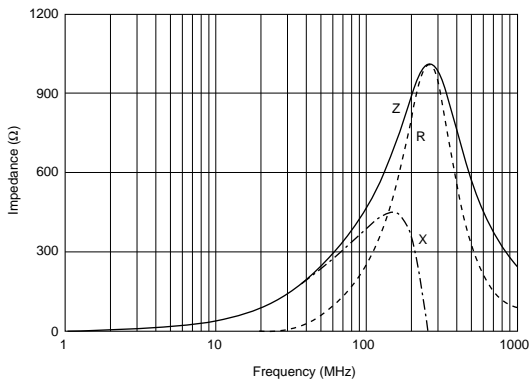

BLM21BD601SN1

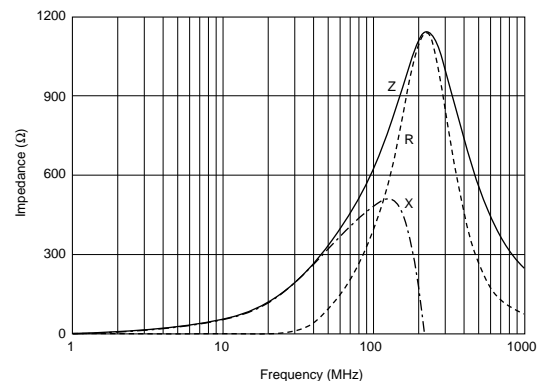


Continued on the following page. ↗

Continued from the preceding page.


Impedance-Frequency Characteristics

1


BLM21BD751SN1

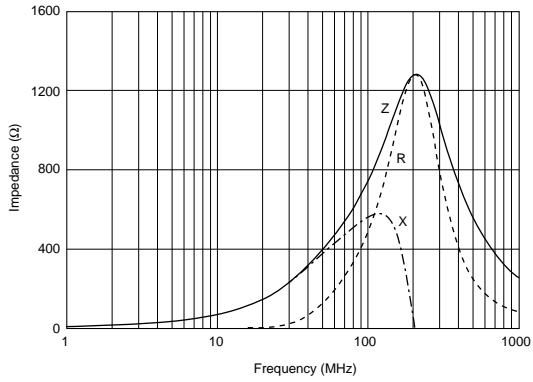


BLM21BD102SN1

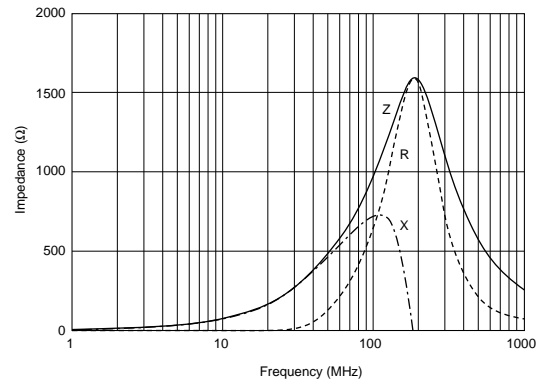


BLM21BD152SN1

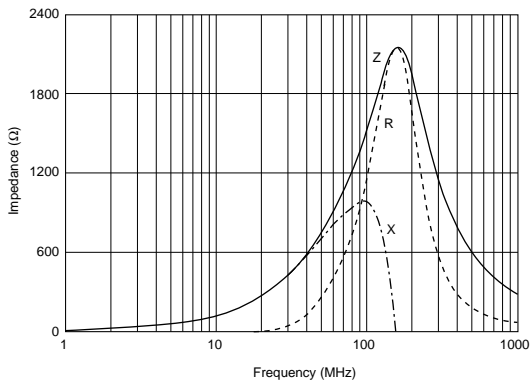


BLM21BD182SN1

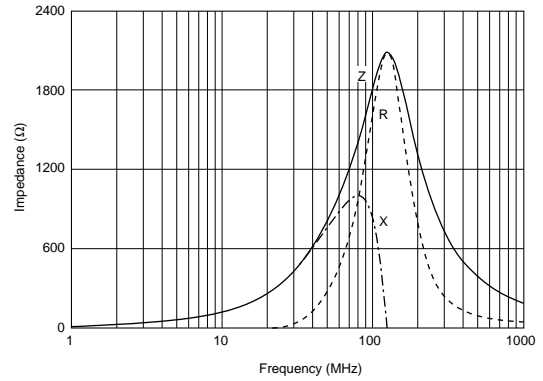


BLM21BD222TN1

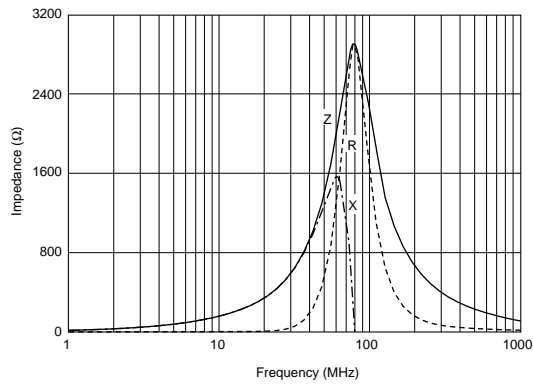


BLM21BD222SN1

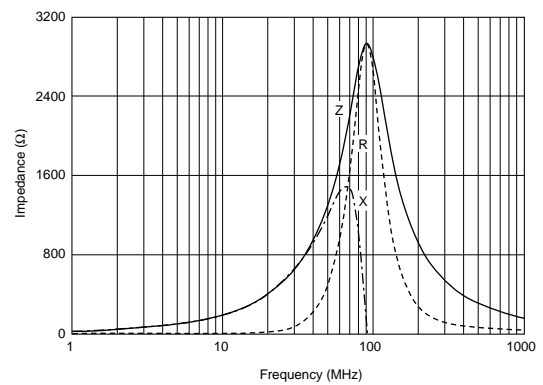

BLM21BD272SN1

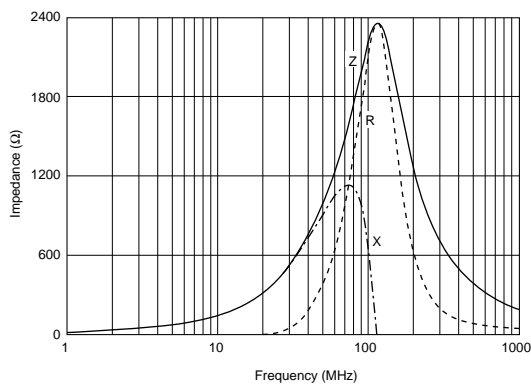


BLM31B Series (1206 Size)

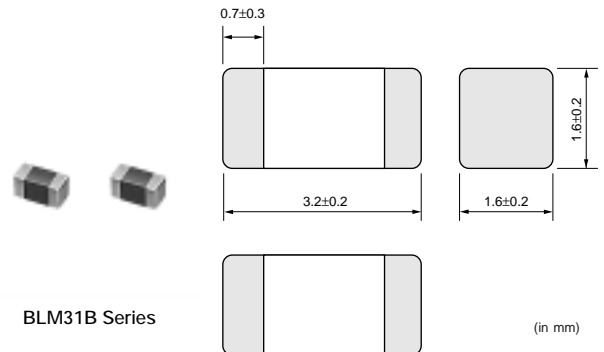


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM31BE601FN1	600 ±25%	300	0.35	-55 to 125

■ Impedance-Frequency (Typical)

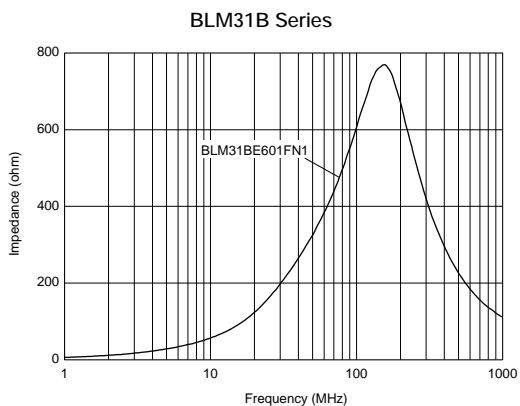

■ Impedance-Frequency Characteristics

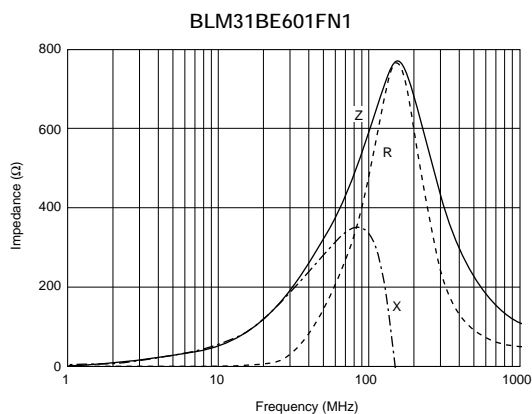


■ Features (BLM_R Series)


The chip ferrite bead BLM series comprises ferrite bead in the shape of a chip. This ferrite bead generates a high impedance which at high frequencies mainly consists of a resistance element. The BLM series is effective in circuits without stable ground lines because the BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. The BLM_R series can be used in Digital Interface. Resistance of BLM_R series especially grows in the lower frequency range. Therefore BLM_R series is less effect for Digital signal waveform at low frequency range and can suppress the ringing.

■ Equivalent Circuit

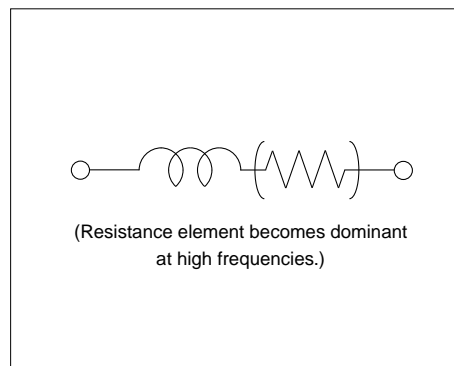


BLM18R Series (0603 Size)

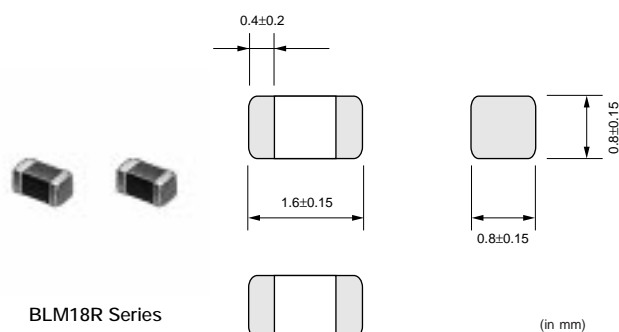

Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM18RK121SN1	120 ±25%	200	0.25	-55 to 125
BLM18RK221SN1	220 ±25%	200	0.30	-55 to 125
BLM18RK471SN1	470 ±25%	200	0.50	-55 to 125
BLM18RK601SN1	600 ±25%	200	0.60	-55 to 125
BLM18RK102SN1	1000 ±25%	200	0.80	-55 to 125


■ Impedance-Frequency (Typical)

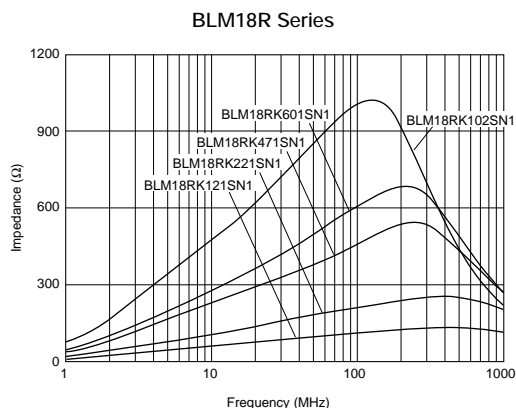


1

■ Impedance-Frequency Characteristics


BLM18RK121SN1

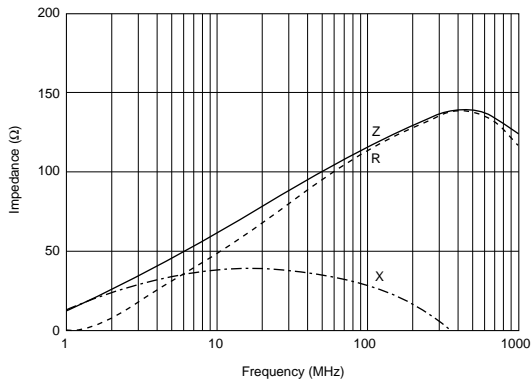


BLM18RK221SN1

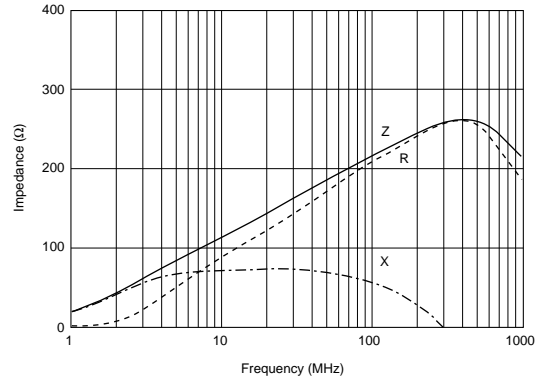


BLM18RK471SN1

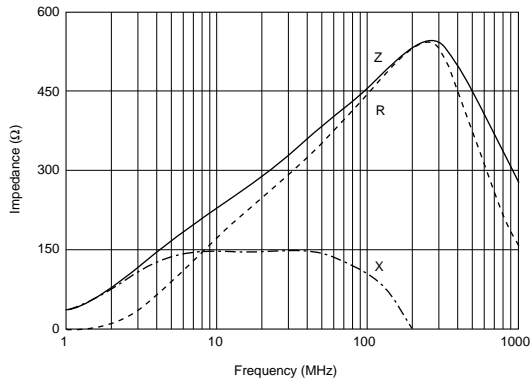


BLM18RK601SN1

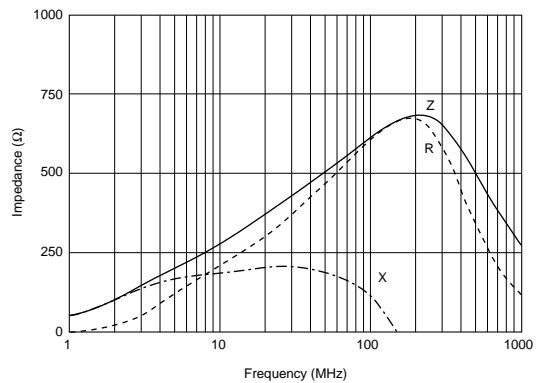

BLM18RK102SN1

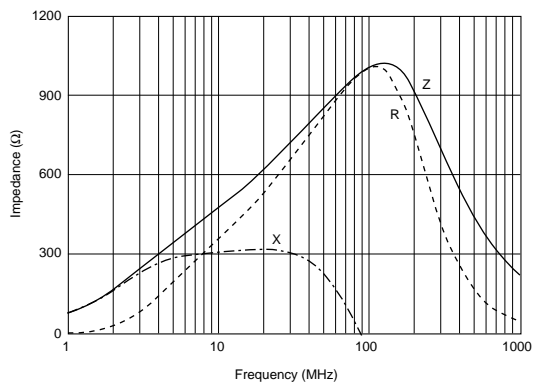


BLM21R Series (0805 Size)




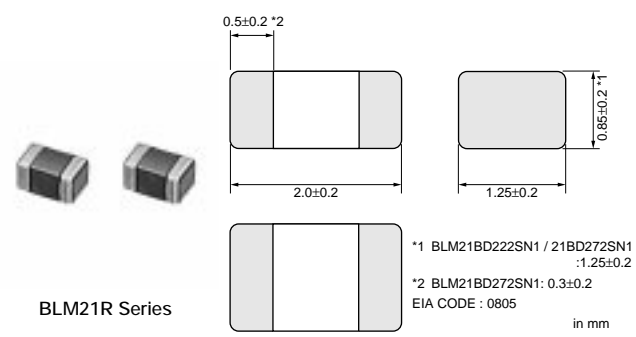


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM21RK121SN1	120 ±25%	200	0.15	-55 to 125
BLM21RK221SN1	220 ±25%	200	0.20	-55 to 125
BLM21RK471SN1	470 ±25%	200	0.25	-55 to 125
BLM21RK601SN1	600 ±25%	200	0.30	-55 to 125
BLM21RK102SN1	1000 ±25%	200	0.50	-55 to 125

■ Impedance-Frequency (Typical)

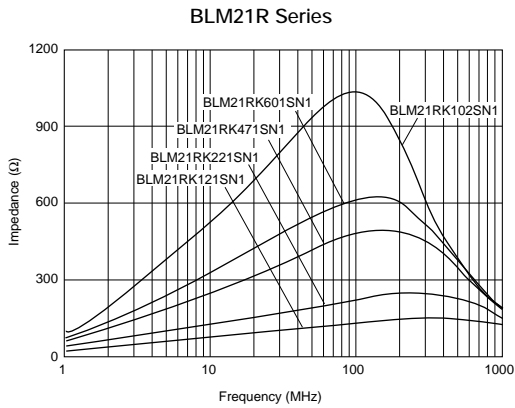

■ Impedance-Frequency Characteristics

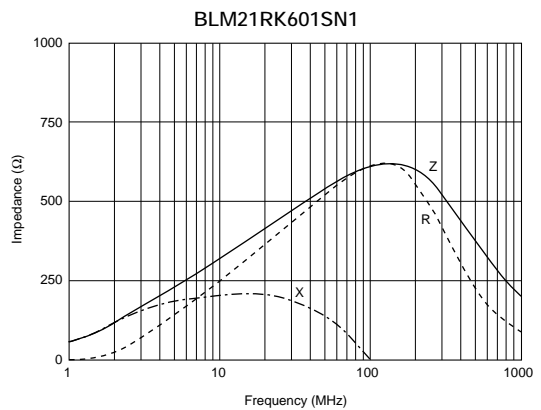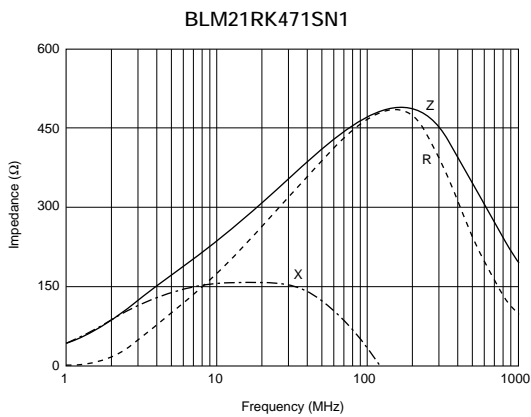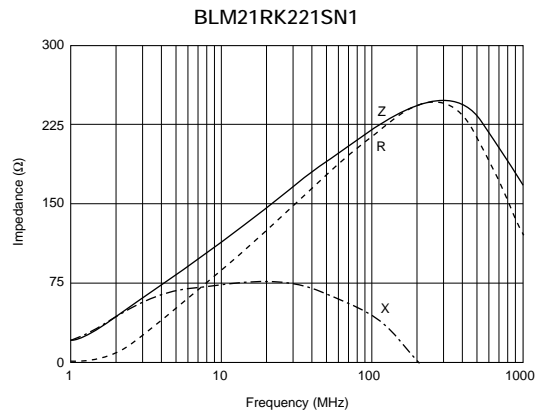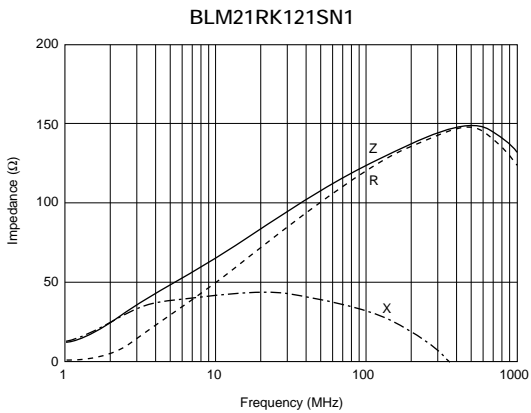


Continued on the following page.

Continued from the preceding page.

1

Impedance-Frequency Characteristics

BLM21RK102SN1

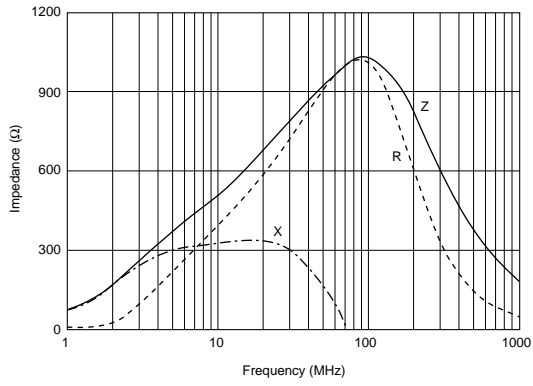


■ Features (BLM_P Series)


The chip ferrite bead BLM series comprises ferrite bead in the shape of a chip. This ferrite bead generates a high impedance which at high frequencies mainly consists of a resistance element. The BLM series is effective in circuits without stable ground lines because the BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. The BLM_P series can be used in high current circuits due to its low DC resistance. It can match power lines to a maximum of 6A DC (BLM41P).

■ Equivalent Circuit

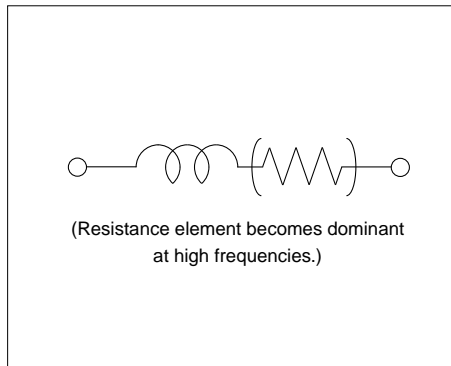

BLM18P Series (0603 Size)

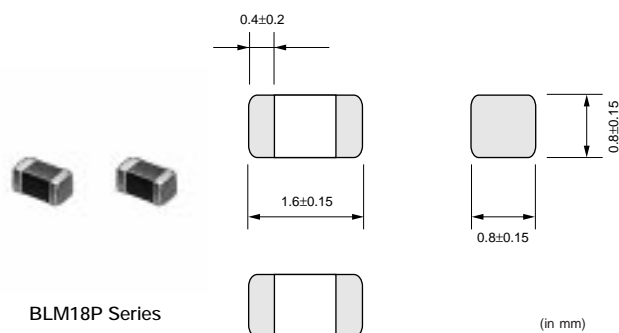


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM18PG300SN1	30 (Typ.)	1000	0.05	-55 to 125
BLM18PG330SN1	33 ±25%	3000	0.025	-55 to 125
BLM18PG600SN1	60 (Typ.)	500	0.10	-55 to 125
BLM18PG121SN1	120 ±25%	2000	0.05	-55 to 125
BLM18PG181SN1	180 ±25%	1500	0.09	-55 to 125

When the BLM_P series is for Large-current used in operating temperatures exceeding +85 °C, derating of current is necessary. Please apply the derating curve shown in Notice (Rating) of BLM_P series according to the operating temperature.


■ Impedance-Frequency (Typical)

BLM18P Series

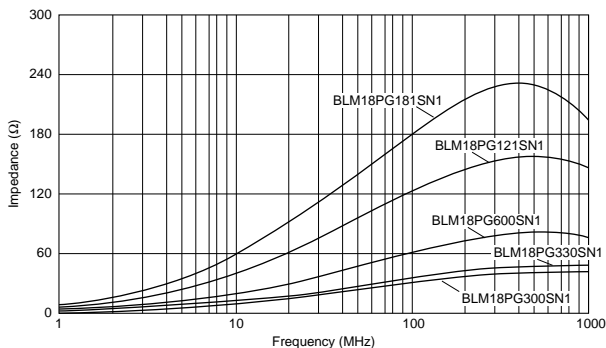


1 ■ Impedance-Frequency Characteristics


BLM18PG300SN1

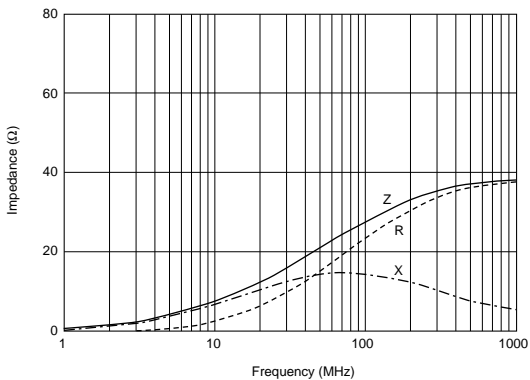


BLM18PG330SN1

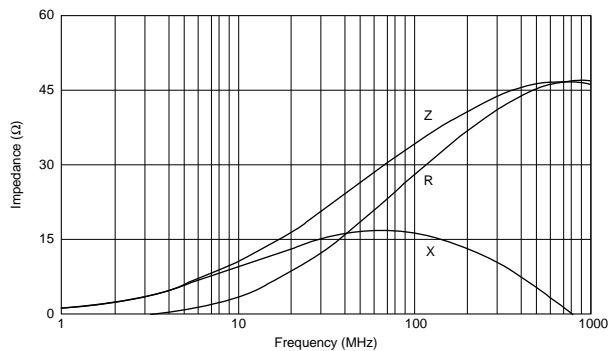


BLM18PG600SN1

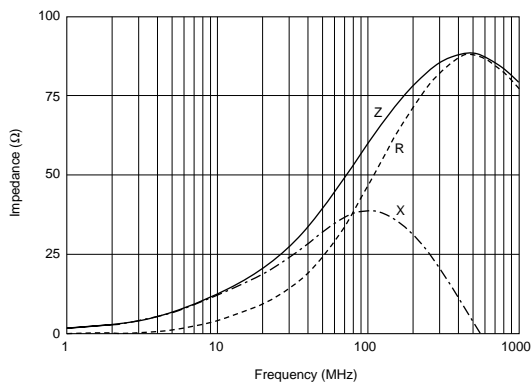


BLM18PG121SN1

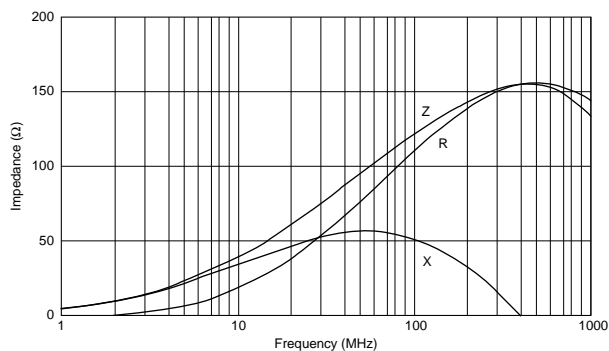

BLM18PG181SN1

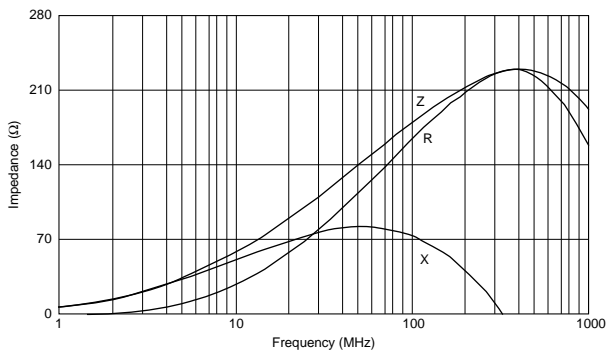


BLM21P Series (0805 Size)

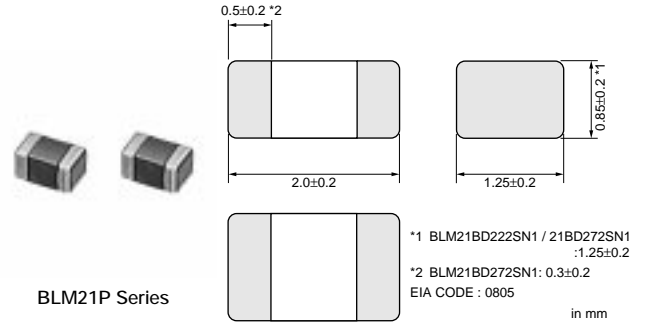



Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM21PG220SN1	22 (Typ.)	6000	0.01	-55 to 125
BLM21PG300SN1	30 (Typ.)	3000	0.015	-55 to 125
BLM21PG600SN1	60 (Typ.)	3000	0.025	-55 to 125
BLM21PG221SN1	220 (Typ.)	2000	0.050	-55 to 125
BLM21PG331SN1	330 (Typ.)	1500	0.09	-55 to 125

When the BLM_P series is for Large-current used in operating temperatures exceeding +85 °C, derating of current is necessary. Please apply the derating curve shown in Notice (Rating) of BLM_P series according to the operating temperature.

■ Impedance-Frequency (Typical)

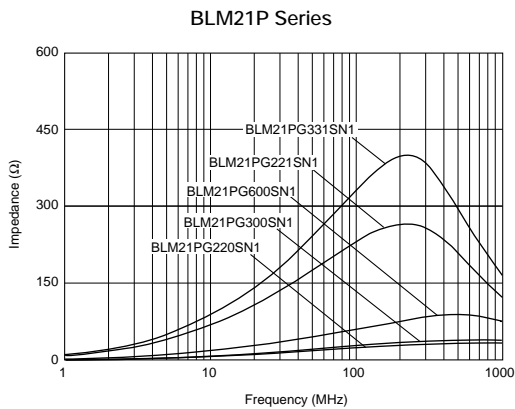

■ Impedance-Frequency Characteristics

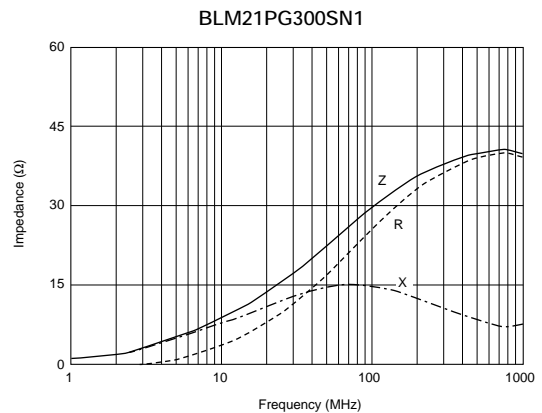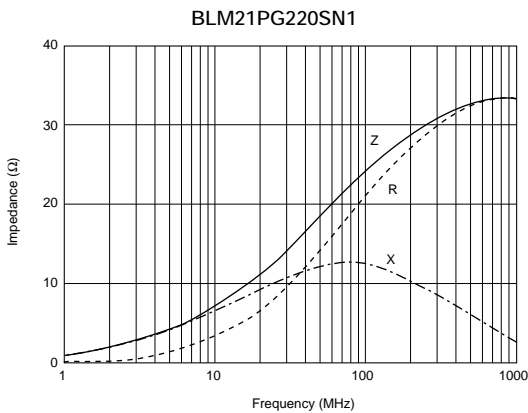


Continued on the following page. ↗


Continued from the preceding page.

Impedance-Frequency Characteristics


BLM21PG600SN1

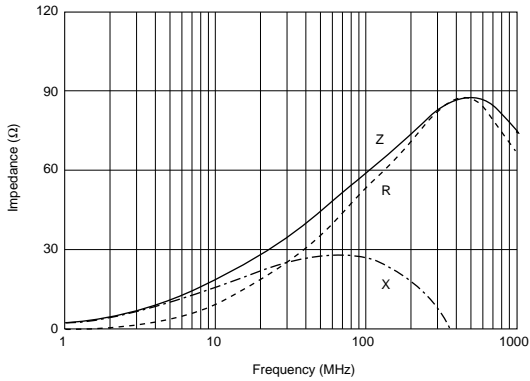


BLM21PG221SN1

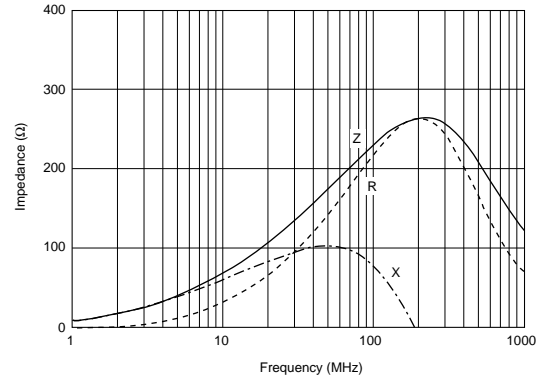

BLM21PG331SN1

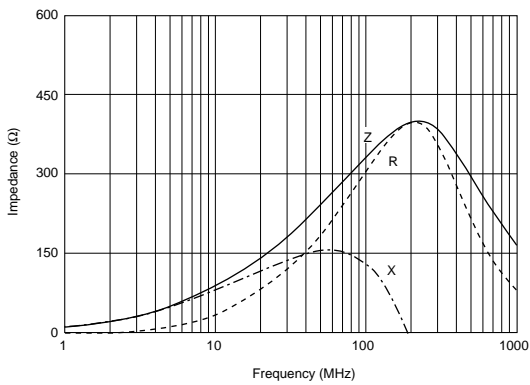

BLM31P Series (1206 Size)

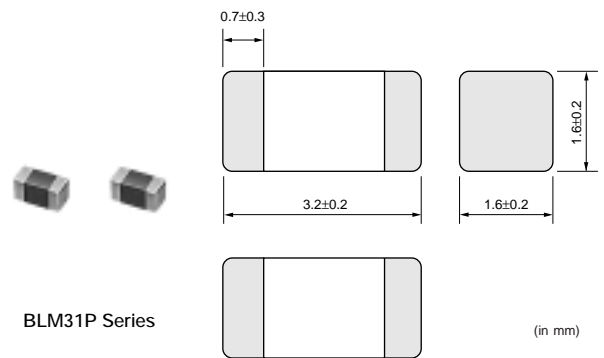


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM31PG330SN1	33 (Typ.)	6000	0.01	-55 to 125
BLM31PG500SN1	50 (Typ.)	3000	0.025	-55 to 125
BLM31PG121SN1	120 (Typ.)	3000	0.025	-55 to 125
BLM31PG391SN1	390 (Typ.)	2000	0.05	-55 to 125
BLM31PG601SN1	600 (Typ.)	1500	0.09	-55 to 125

When the BLM_P series is for Large-current used in operating temperatures exceeding +85 °C, derating of current is necessary. Please apply the derating curve shown in Notice (Rating) of BLM_P series according to the operating temperature.


■ Impedance-Frequency (Typical)

BLM31P Series

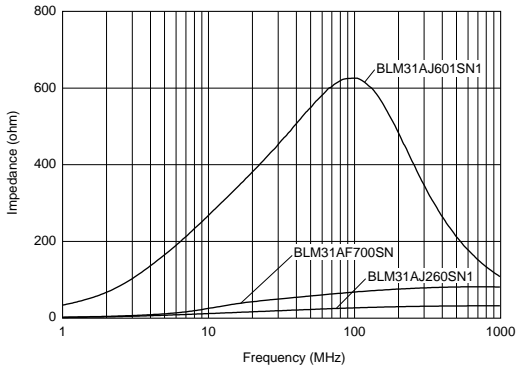


■ Impedance-Frequency Characteristics


BLM31PG330SN1

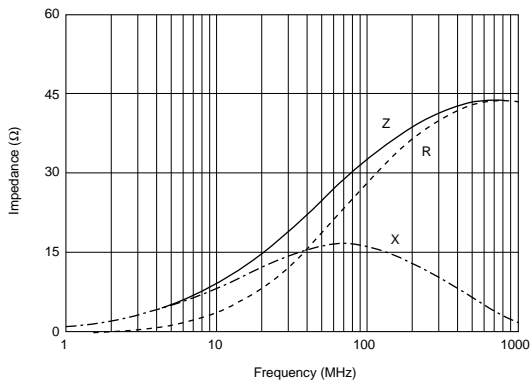


BLM31PG500SN1

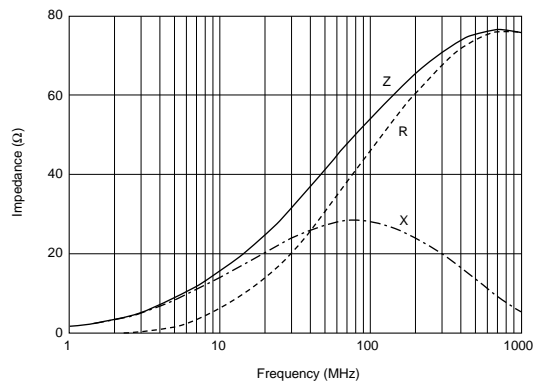


BLM31PG121SN1

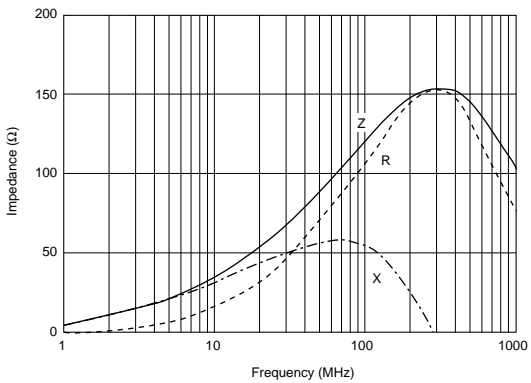


BLM31PG391SN1

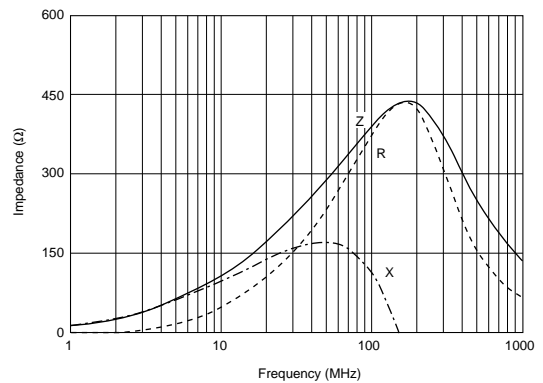

BLM31PG601SN1

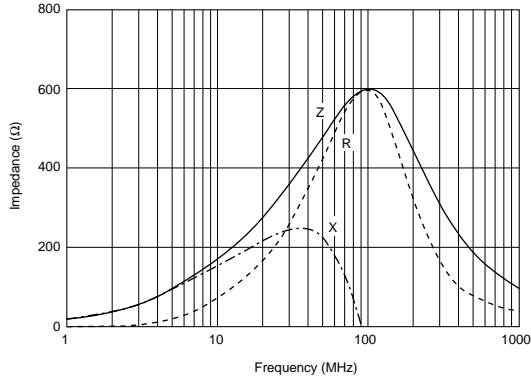



BLM41P Series (1806 Size)

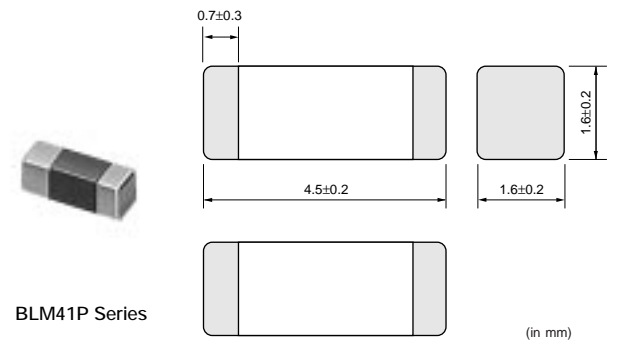



Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM41PG600SN1	60 (Typ.)	6000	0.01	-55 to 125
BLM41PG750SN1	75 (Typ.)	3000	0.025	-55 to 125
BLM41PF800SN1	80 (Typ.)	1000	0.10	-55 to 125
BLM41PG181SN1	180 (Typ.)	3000	0.025	-55 to 125
BLM41PG471SN1	470 (Typ.)	2000	0.05	-55 to 125
BLM41PG102SN1	1000 (Typ.)	1500	0.09	-55 to 125

When the BLM_P series is for Large-current used in operating temperatures exceeding +85 °C, derating of current is necessary. Please apply the derating curve shown in Notice (Rating) of BLM_P series according to the operating temperature.

■ Impedance-Frequency (Typical)

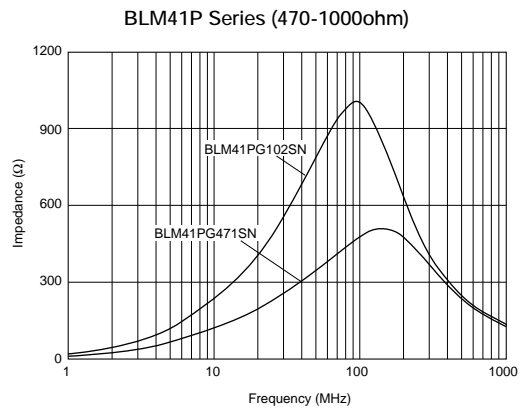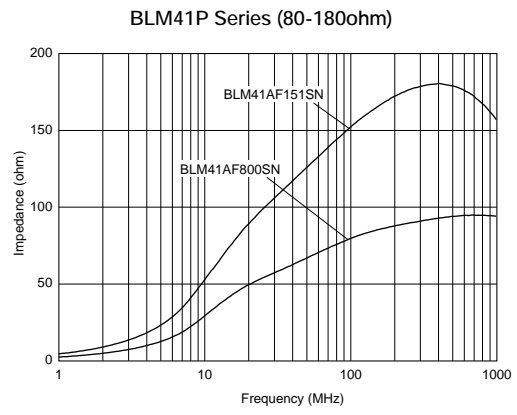





■ Impedance-Frequency Characteristics

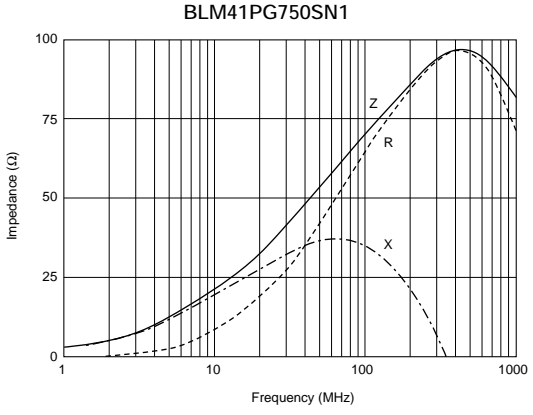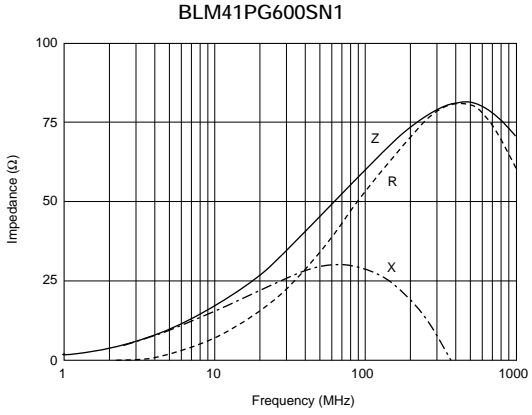

Continued on the following page. ↗

Continued from the preceding page.

■ Impedance-Frequency Characteristics

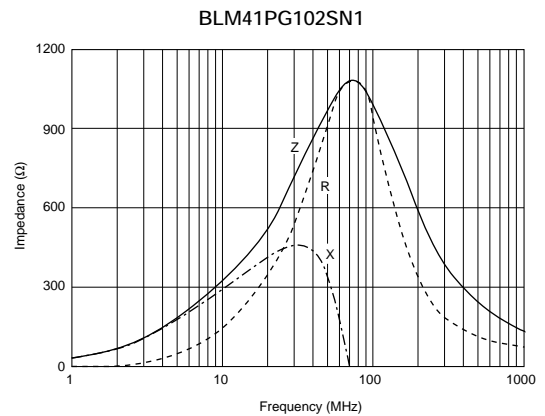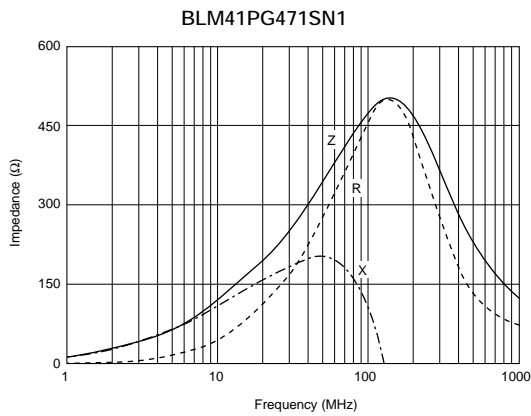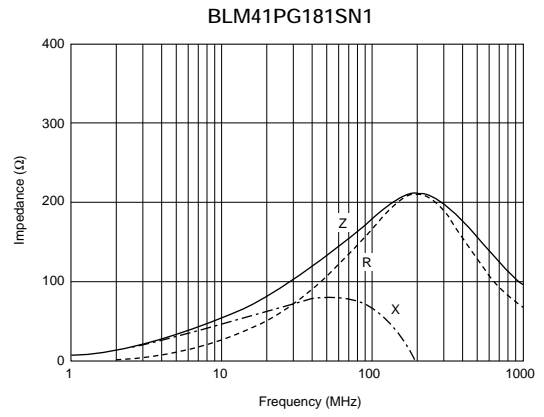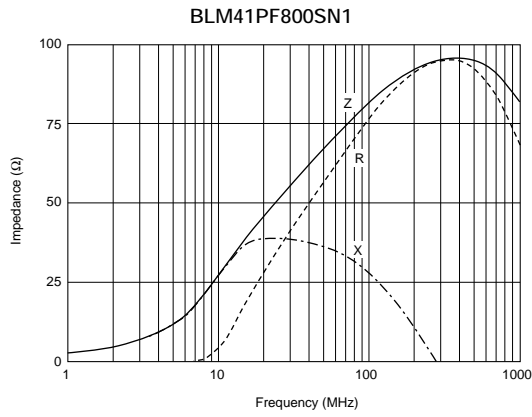

■ Notice (Rating)

When the BLM□□P series is for Large-current used in operating temperatures exceeding + 85°C, derating of current is necessary. Please apply the derating curve shown below according to the operating temperature.

