

# BZV55 series

## Voltage regulator diodes

Rev. 04 — 19 July 2007

Product data sheet

## 1. Product profile

### 1.1 General description

Low-power voltage regulator diodes in small hermetically sealed glass SOD80C Surface-Mounted Device (SMD) packages. The diodes are available in the normalized E24  $\pm 2\%$  (BZV55-B) and approximately  $\pm 5\%$  (BZV55-C) tolerance range. The series consists of 37 types with nominal working voltages from 2.4 V to 75 V.

### 1.2 Features

- Non-repetitive peak reverse power dissipation:  $\leq 40$  W
- Total power dissipation:  $\leq 500$  mW
- Two tolerance series:  $\pm 2\%$  and  $\pm 5\%$
- Wide working voltage range: nominal 2.4 V to 75 V (E24 range)
- Low differential resistance
- Small hermetically sealed glass SMD package

### 1.3 Applications

- General regulation functions

### 1.4 Quick reference data

Table 1. Quick reference data

| Symbol    | Parameter                                     | Conditions    | Min | Typ | Max | Unit |
|-----------|---|---------------|-----|-----|-----|------|
| $V_F$     | forward voltage                               | $I_F = 10$ mA | -   | -   | 0.9 | V    |
| $P_{ZSM}$ | non-repetitive peak reverse power dissipation |               | [1] | -   | 40  | W    |

[1]  $t_p = 100$   $\mu$ s; square wave;  $T_j = 25$  °C prior to surge

## 2. Pinning information

Table 2. Pinning

| Pin | Description | Simplified outline | Symbol        |
|-----|-------------|--------------------|---------------|
| 1   | cathode     | [1]                | <br>006aaa152 |
| 2   | anode       |                    |               |

[1] The marking band indicates the cathode.

### 3. Ordering information

**Table 3. Ordering information**

| Type number                            | Package |   |         |
|--|---------|---|---------|
|  | Name    | Description   | Version |
| BZV55-B2V4 to BZV55-C75 <sup>[1]</sup> | -       | hermetically sealed glass surface-mounted package; 2 connectors | SOD80C  |

[1] The series consists of 74 types with nominal working voltages from 2.4 V to 75 V.

### 4. Marking

**Table 4. Marking codes**

| Type number             | Marking code <sup>[1]</sup> |
|-------------------------|-----------------------------|
| BZV55-B2V4 to BZV55-C75 | marking band                |

[1] blue: made in China  
yellow: made in Philippines

### 5. Limiting values

**Table 5. Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134).*

| Symbol    | Parameter                                     | Conditions                  | Min              | Max   | Unit |
|-----------|---|-----------------------------|------------------|---|------|
| $I_F$     | forward current                               |                             | -                | 250   | mA   |
| $I_{ZSM}$ | non-repetitive peak reverse current           |                             | <sup>[1]</sup> - | see <a href="#">Table 8</a> and <a href="#">9</a> |      |
| $P_{ZSM}$ | non-repetitive peak reverse power dissipation |                             | <sup>[1]</sup> - | 40  | W    |
| $P_{tot}$ | total power dissipation                       | $T_{amb} \leq 50\text{ °C}$ | <sup>[2]</sup> - | 400   | mW   |
|           |   | $T_{tp} \leq 50\text{ °C}$  | <sup>[2]</sup> - | 500   | mW   |
| $T_{stg}$ | storage temperature                           |                             | -65              | +200  | °C   |
| $T_j$     | junction temperature                          |                             | -65              | +200  | °C   |

[1]  $t_p = 100\ \mu\text{s}$ ; square wave;  $T_j = 25\text{ °C}$  prior to surge

[2] Device mounted on a ceramic substrate of  $10 \times 10 \times 0.6\text{ mm}$ .

### 6. Thermal characteristics

**Table 6. Thermal characteristics**

| Symbol        | Parameter                                     | Conditions  | Min              | Typ | Max | Unit |
|---------------|---|-------------|------------------|-----|-----|------|
| $R_{th(j-a)}$ | thermal resistance from junction to ambient   | in free air | <sup>[1]</sup> - | -   | 380 | K/W  |
| $R_{th(j-t)}$ | thermal resistance from junction to tie-point |             | -                | -   | 300 | K/W  |

[1] Device mounted on a ceramic substrate of  $10 \times 10 \times 0.6\text{ mm}$ .

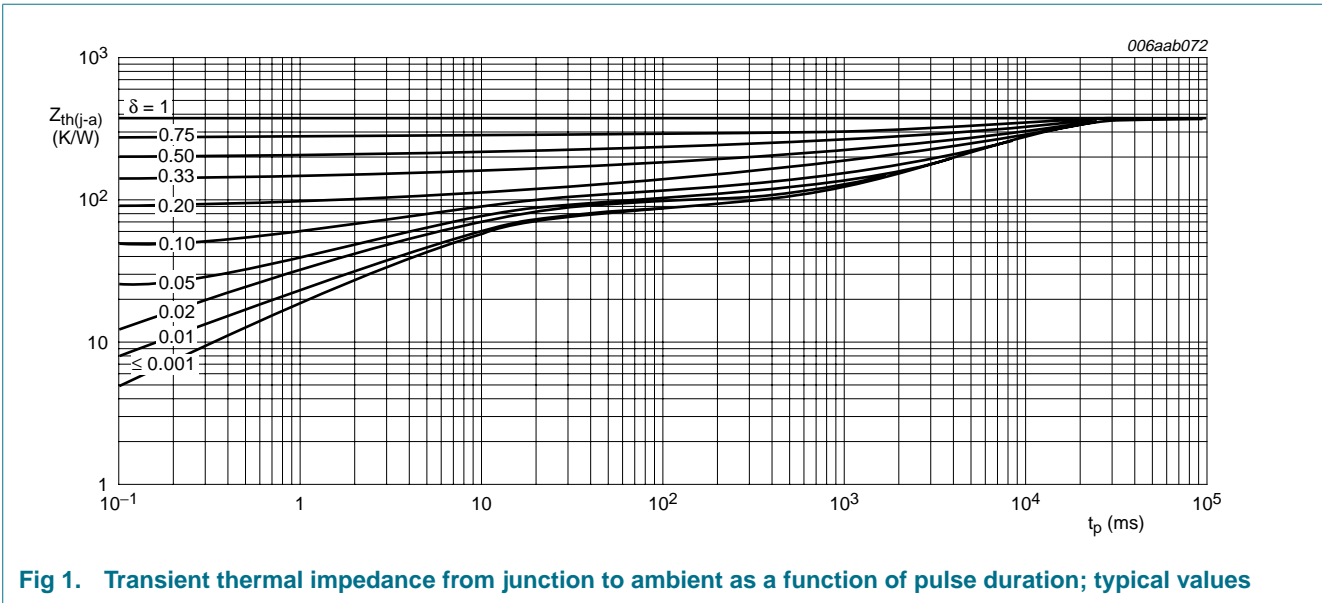


Fig 1. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

## 7. Characteristics

**Table 7. Characteristics**  
*T<sub>j</sub> = 25 °C unless otherwise specified.*

| Symbol         | Parameter                  | Conditions                              | Min | Typ | Max | Unit |
|----------------|----------------------------|---|-----|-----|-----|------|
| V <sub>F</sub> | forward voltage            | I <sub>F</sub> = 10 mA                  | -   | -   | 0.9 | V    |
| I <sub>R</sub> | reverse current            |   |     |     |     |      |
|                | BZV55-B/C2V4               | V <sub>R</sub> = 1 V                    | -   | -   | 50  | μA   |
|                | BZV55-B/C2V7               | V <sub>R</sub> = 1 V                    | -   | -   | 20  | μA   |
|                | BZV55-B/C3V0               | V <sub>R</sub> = 1 V                    | -   | -   | 10  | μA   |
|                | BZV55-B/C3V3               | V <sub>R</sub> = 1 V                    | -   | -   | 5   | μA   |
|                | BZV55-B/C3V6               | V <sub>R</sub> = 1 V                    | -   | -   | 5   | μA   |
|                | BZV55-B/C3V9               | V <sub>R</sub> = 1 V                    | -   | -   | 3   | μA   |
|                | BZV55-B/C4V3               | V <sub>R</sub> = 1 V                    | -   | -   | 3   | μA   |
|                | BZV55-B/C4V7               | V <sub>R</sub> = 2 V                    | -   | -   | 3   | μA   |
|                | BZV55-B/C5V1               | V <sub>R</sub> = 2 V                    | -   | -   | 2   | μA   |
|                | BZV55-B/C5V6               | V <sub>R</sub> = 2 V                    | -   | -   | 1   | μA   |
|                | BZV55-B/C6V2               | V <sub>R</sub> = 4 V                    | -   | -   | 3   | μA   |
|                | BZV55-B/C6V8               | V <sub>R</sub> = 4 V                    | -   | -   | 2   | μA   |
|                | BZV55-B/C7V5               | V <sub>R</sub> = 5 V                    | -   | -   | 1   | μA   |
|                | BZV55-B/C8V2               | V <sub>R</sub> = 5 V                    | -   | -   | 700 | nA   |
|                | BZV55-B/C9V1               | V <sub>R</sub> = 6 V                    | -   | -   | 500 | nA   |
|                | BZV55-B/C10                | V <sub>R</sub> = 7 V                    | -   | -   | 200 | nA   |
|                | BZV55-B/C11                | V <sub>R</sub> = 8 V                    | -   | -   | 100 | nA   |
|                | BZV55-B/C12                | V <sub>R</sub> = 8 V                    | -   | -   | 100 | nA   |
|                | BZV55-B/C13                | V <sub>R</sub> = 8 V                    | -   | -   | 100 | nA   |
|                | BZV55-B/C15 to BZV55-B/C75 | V <sub>R</sub> = 0.7V <sub>Z(nom)</sub> | -   | -   | 50  | nA   |

**Table 8. Characteristics per type; BZV55-B2V4 to BZV55-C24**

$T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified.

| BZV55-xx | Sel | Working voltage $V_Z$ (V) |      | Differential resistance $r_{dif}$ ( $\Omega$ ) |     |                     |     | Temperature coefficient $S_Z$ (mV/K) |      |      | Diode capacitance $C_d$ (pF) <sup>[1]</sup> | Non-repetitive peak reverse current $I_{ZSM}$ (A) <sup>[2]</sup> |
|----------|-----|---------------------------|------|--|-----|---------------------|-----|--------------------------------------|------|------|---|--|
|          |     |                           |      | $I_Z = 1\text{ mA}$                            |     | $I_Z = 5\text{ mA}$ |     | $I_Z = 5\text{ mA}$                  |      |      |   |  |
|          |     | Min                       | Max  | Typ  | Max | Typ                 | Max | Min                                  | Typ  | Max  | Max   | Max  |
| 2V4      | B   | 2.35                      | 2.45 | 275  | 600 | 70                  | 100 | -3.5                                 | -1.6 | 0    | 450   | 6.0  |
|          | C   | 2.2                       | 2.6  |  |     |                     |     |                                      |      |      |   |  |
| 2V7      | B   | 2.65                      | 2.75 | 300  | 600 | 75                  | 100 | -3.5                                 | -2.0 | 0    | 450   | 6.0  |
|          | C   | 2.5                       | 2.9  |  |     |                     |     |                                      |      |      |   |  |
| 3V0      | B   | 2.94                      | 3.06 | 325  | 600 | 80                  | 95  | -3.5                                 | -2.1 | 0    | 450   | 6.0  |
|          | C   | 2.8                       | 3.2  |  |     |                     |     |                                      |      |      |   |  |
| 3V3      | B   | 3.23                      | 3.37 | 350  | 600 | 85                  | 95  | -3.5                                 | -2.4 | 0    | 450   | 6.0  |
|          | C   | 3.1                       | 3.5  |  |     |                     |     |                                      |      |      |   |  |
| 3V6      | B   | 3.53                      | 3.67 | 375  | 600 | 85                  | 90  | -3.5                                 | -2.4 | 0    | 450   | 6.0  |
|          | C   | 3.4                       | 3.8  |  |     |                     |     |                                      |      |      |   |  |
| 3V9      | B   | 3.82                      | 3.98 | 400  | 600 | 85                  | 90  | -3.5                                 | -2.5 | 0    | 450   | 6.0  |
|          | C   | 3.7                       | 4.1  |  |     |                     |     |                                      |      |      |   |  |
| 4V3      | B   | 4.21                      | 4.39 | 410  | 600 | 80                  | 90  | -3.5                                 | -2.5 | 0    | 450   | 6.0  |
|          | C   | 4.0                       | 4.6  |  |     |                     |     |                                      |      |      |   |  |
| 4V7      | B   | 4.61                      | 4.79 | 425  | 500 | 50                  | 80  | -3.5                                 | -1.4 | 0.2  | 300   | 6.0  |
|          | C   | 4.4                       | 5.0  |  |     |                     |     |                                      |      |      |   |  |
| 5V1      | B   | 5.0                       | 5.2  | 400  | 480 | 40                  | 60  | -2.7                                 | -0.8 | 1.2  | 300   | 6.0  |
|          | C   | 4.8                       | 5.4  |  |     |                     |     |                                      |      |      |   |  |
| 5V6      | B   | 5.49                      | 5.71 | 80   | 400 | 15                  | 40  | -2.0                                 | 1.2  | 2.5  | 300   | 6.0  |
|          | C   | 5.2                       | 6.0  |  |     |                     |     |                                      |      |      |   |  |
| 6V2      | B   | 6.08                      | 6.32 | 40   | 150 | 6                   | 10  | 0.4                                  | 2.3  | 3.7  | 200   | 6.0  |
|          | C   | 5.8                       | 6.6  |  |     |                     |     |                                      |      |      |   |  |
| 6V8      | B   | 6.66                      | 6.94 | 30   | 80  | 6                   | 15  | 1.2                                  | 3.0  | 4.5  | 200   | 6.0  |
|          | C   | 6.4                       | 7.2  |  |     |                     |     |                                      |      |      |   |  |
| 7V5      | B   | 7.35                      | 7.65 | 30   | 80  | 6                   | 15  | 2.5                                  | 4.0  | 5.3  | 150   | 4.0  |
|          | C   | 7.0                       | 7.9  |  |     |                     |     |                                      |      |      |   |  |
| 8V2      | B   | 8.04                      | 8.36 | 40   | 80  | 6                   | 15  | 3.2                                  | 4.6  | 6.2  | 150   | 4.0  |
|          | C   | 7.7                       | 8.7  |  |     |                     |     |                                      |      |      |   |  |
| 9V1      | B   | 8.92                      | 9.28 | 40   | 100 | 6                   | 15  | 3.8                                  | 5.5  | 7.0  | 150   | 3.0  |
|          | C   | 8.5                       | 9.6  |  |     |                     |     |                                      |      |      |   |  |
| 10       | B   | 9.8                       | 10.2 | 50   | 150 | 8                   | 20  | 4.5                                  | 6.4  | 8.0  | 90  | 3.0  |
|          | C   | 9.4                       | 10.6 |  |     |                     |     |                                      |      |      |   |  |
| 11       | B   | 10.8                      | 11.2 | 50   | 150 | 10                  | 20  | 5.4                                  | 7.4  | 9.0  | 85  | 2.5  |
|          | C   | 10.4                      | 11.6 |  |     |                     |     |                                      |      |      |   |  |
| 12       | B   | 11.8                      | 12.2 | 50   | 150 | 10                  | 25  | 6.0                                  | 8.4  | 10.0 | 85  | 2.5  |
|          | C   | 11.4                      | 12.7 |  |     |                     |     |                                      |      |      |   |  |

**Table 8. Characteristics per type; BZV55-B2V4 to BZV55-C24 ...continued**

$T_j = 25\text{ °C}$  unless otherwise specified.

| BZV55-x<br>xx | Sel | Working<br>voltage<br>$V_Z$ (V) |      | Differential resistance<br>$r_{dif}$ ( $\Omega$ ) |     |                     |     | Temperature<br>coefficient<br>$S_Z$ (mV/K) |      |      | Diode<br>capacitance<br>$C_d$ (pF) <sup>[1]</sup> | Non-repetitive<br>peak reverse<br>current<br>$I_{ZSM}$ (A) <sup>[2]</sup> |
|---------------|-----|---------------------------------|------|---|-----|---------------------|-----|--|------|------|---|---|
|               |     |                                 |      | $I_Z = 1\text{ mA}$                               |     | $I_Z = 5\text{ mA}$ |     | $I_Z = 5\text{ mA}$                        |      |      |   |   |
|               |     | Min                             | Max  | Typ   | Max | Typ                 | Max | Min  | Typ  | Max  | Max   | Max   |
| 13            | B   | 12.7                            | 13.3 | 50  | 170 | 10                  | 30  | 7.0  | 9.4  | 11.0 | 80  | 2.5   |
|               | C   | 12.4                            | 14.1 |   |     |                     |     |  |      |      |   |   |
| 15            | B   | 14.7                            | 15.3 | 50  | 200 | 10                  | 30  | 9.2  | 11.4 | 13.0 | 75  | 2.0   |
|               | C   | 13.8                            | 15.6 |   |     |                     |     |  |      |      |   |   |
| 16            | B   | 15.7                            | 16.3 | 50  | 200 | 10                  | 40  | 10.4                                       | 12.4 | 14.0 | 75  | 1.5   |
|               | C   | 15.3                            | 17.1 |   |     |                     |     |  |      |      |   |   |
| 18            | B   | 17.6                            | 18.4 | 50  | 225 | 10                  | 45  | 12.4                                       | 14.4 | 16.0 | 70  | 1.5   |
|               | C   | 16.8                            | 19.1 |   |     |                     |     |  |      |      |   |   |
| 20            | B   | 19.6                            | 20.4 | 60  | 225 | 15                  | 55  | 12.3                                       | 15.6 | 18.0 | 60  | 1.5   |
|               | C   | 18.8                            | 21.2 |   |     |                     |     |  |      |      |   |   |
| 22            | B   | 21.6                            | 22.4 | 60  | 250 | 20                  | 55  | 14.1                                       | 17.6 | 20.0 | 60  | 1.25  |
|               | C   | 20.8                            | 23.3 |   |     |                     |     |  |      |      |   |   |
| 24            | B   | 23.5                            | 24.5 | 60  | 250 | 25                  | 70  | 15.9                                       | 19.6 | 22.0 | 55  | 1.25  |
|               | C   | 22.8                            | 25.6 |   |     |                     |     |  |      |      |   |   |


[1]  $f = 1\text{ MHz}$ ;  $V_R = 0\text{ V}$

[2]  $t_p = 100\text{ }\mu\text{s}$ ; square wave;  $T_j = 25\text{ °C}$  prior to surge

**Table 9. Characteristics per type; BZV55-B27 to BZV55-C75** $T_j = 25\text{ °C}$  unless otherwise specified.


| BZV55-x<br>xx | Sel | Working<br>voltage<br>$V_Z$ (V) |      | Differential resistance<br>$r_{\text{dif}}$ ( $\Omega$ ) |     |                     |     | Temperature<br>coefficient<br>$S_Z$ (mV/K) |      |      | Diode<br>capacitance<br>$C_d$ (pF) <sup>[1]</sup> | Non-repetitive<br>peak reverse<br>current<br>$I_{ZSM}$ (A) <sup>[2]</sup> |
|---------------|-----|---------------------------------|------|--|-----|---------------------|-----|--|------|------|---|---|
|               |     |                                 |      | $I_Z = 0.5\text{ mA}$                                    |     | $I_Z = 2\text{ mA}$ |     | $I_Z = 2\text{ mA}$                        |      |      |   |   |
|               |     | Min                             | Max  | Typ  | Max | Typ                 | Max | Min  | Typ  | Max  | Max   | Max   |
| 27            | B   | 26.5                            | 27.5 | 65   | 300 | 25                  | 80  | 18.0                                       | 22.7 | 25.3 | 50  | 1.0   |
|               | C   | 25.1                            | 28.9 |  |     |                     |     |  |      |      |   |   |
| 30            | B   | 29.4                            | 30.6 | 70   | 300 | 30                  | 80  | 20.6                                       | 25.7 | 29.4 | 50  | 1.0   |
|               | C   | 28.0                            | 32.0 |  |     |                     |     |  |      |      |   |   |
| 33            | B   | 32.3                            | 33.7 | 75   | 325 | 35                  | 80  | 23.3                                       | 28.7 | 33.4 | 45  | 0.9   |
|               | C   | 31.0                            | 35.0 |  |     |                     |     |  |      |      |   |   |
| 36            | B   | 35.3                            | 36.7 | 80   | 350 | 35                  | 90  | 26.0                                       | 31.8 | 37.4 | 45  | 0.8   |
|               | C   | 34.0                            | 38.0 |  |     |                     |     |  |      |      |   |   |
| 39            | B   | 38.2                            | 39.8 | 80   | 350 | 40                  | 130 | 28.7                                       | 34.8 | 41.2 | 45  | 0.7   |
|               | C   | 37.0                            | 41.0 |  |     |                     |     |  |      |      |   |   |
| 43            | B   | 42.1                            | 43.9 | 85   | 375 | 45                  | 150 | 31.4                                       | 38.8 | 46.6 | 40  | 0.6   |
|               | C   | 40.0                            | 46.0 |  |     |                     |     |  |      |      |   |   |
| 47            | B   | 46.1                            | 47.9 | 85   | 375 | 50                  | 170 | 35.0                                       | 42.9 | 51.8 | 40  | 0.5   |
|               | C   | 44.0                            | 50.0 |  |     |                     |     |  |      |      |   |   |
| 51            | B   | 50.0                            | 52.0 | 90   | 400 | 60                  | 180 | 38.6                                       | 46.9 | 57.2 | 40  | 0.4   |
|               | C   | 48.0                            | 54.0 |  |     |                     |     |  |      |      |   |   |
| 56            | B   | 54.9                            | 57.1 | 100  | 425 | 70                  | 200 | 42.2                                       | 52.0 | 63.8 | 40  | 0.3   |
|               | C   | 52.0                            | 60.0 |  |     |                     |     |  |      |      |   |   |
| 62            | B   | 60.8                            | 63.2 | 120  | 450 | 80                  | 215 | 58.8                                       | 64.4 | 71.6 | 35  | 0.3   |
|               | C   | 58.0                            | 66.0 |  |     |                     |     |  |      |      |   |   |
| 68            | B   | 66.6                            | 69.4 | 150  | 475 | 90                  | 240 | 65.6                                       | 71.7 | 79.8 | 35  | 0.25  |
|               | C   | 64.0                            | 72.0 |  |     |                     |     |  |      |      |   |   |
| 75            | B   | 73.5                            | 76.5 | 170  | 500 | 95                  | 255 | 73.4                                       | 80.2 | 88.6 | 35  | 0.2   |
|               | C   | 70.0                            | 79.0 |  |     |                     |     |  |      |      |   |   |

[1]  $f = 1\text{ MHz}$ ;  $V_R = 0\text{ V}$ [2]  $t_p = 100\text{ }\mu\text{s}$ ; square wave;  $T_j = 25\text{ °C}$  prior to surge

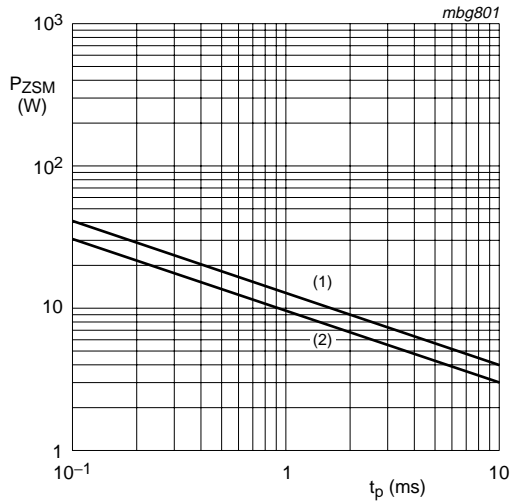


- (1)  $T_j = 25\text{ °C}$  (prior to surge)
- (2)  $T_j = 150\text{ °C}$  (prior to surge)

**Fig 2. Non-repetitive peak reverse power dissipation as a function of pulse duration; maximum values**

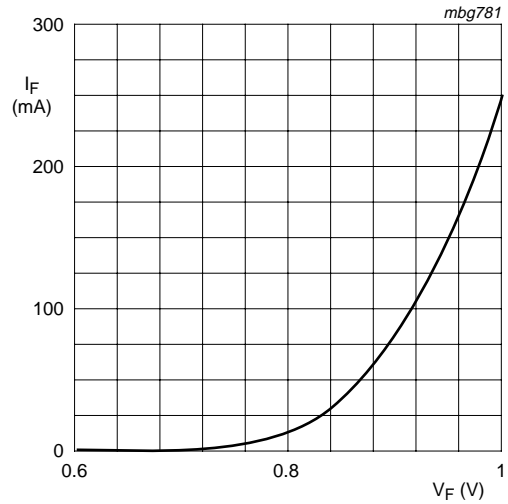


$T_j = 25\text{ °C}$

**Fig 3. Forward current as a function of forward voltage; typical values**

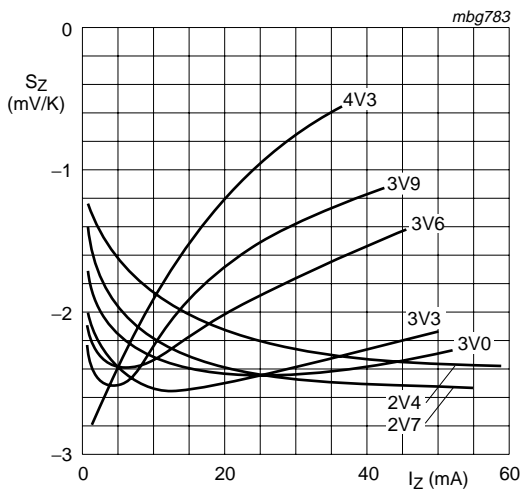

BZV55-B/C2V4 to BZV55-B/C4V3  
 $T_j = 25\text{ °C}$  to  $150\text{ °C}$

**Fig 4. Temperature coefficient as a function of working current; typical values**

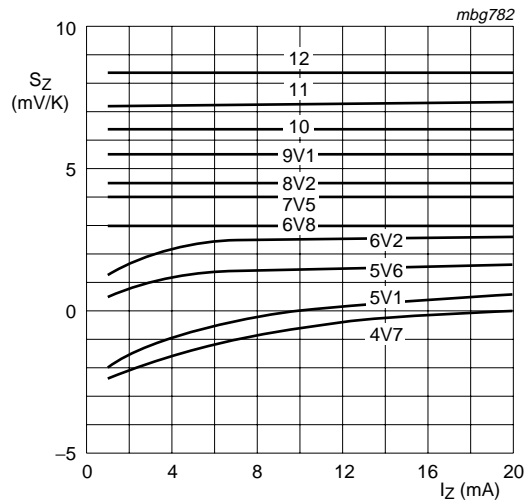

BZV55-B/C4V7 to BZV55-B/C12  
 $T_j = 25\text{ °C}$  to  $150\text{ °C}$

**Fig 5. Temperature coefficient as a function of working current; typical values**

## 8. Package outline

Hermetically sealed glass surface-mounted package; 2 connectors

SOD80C

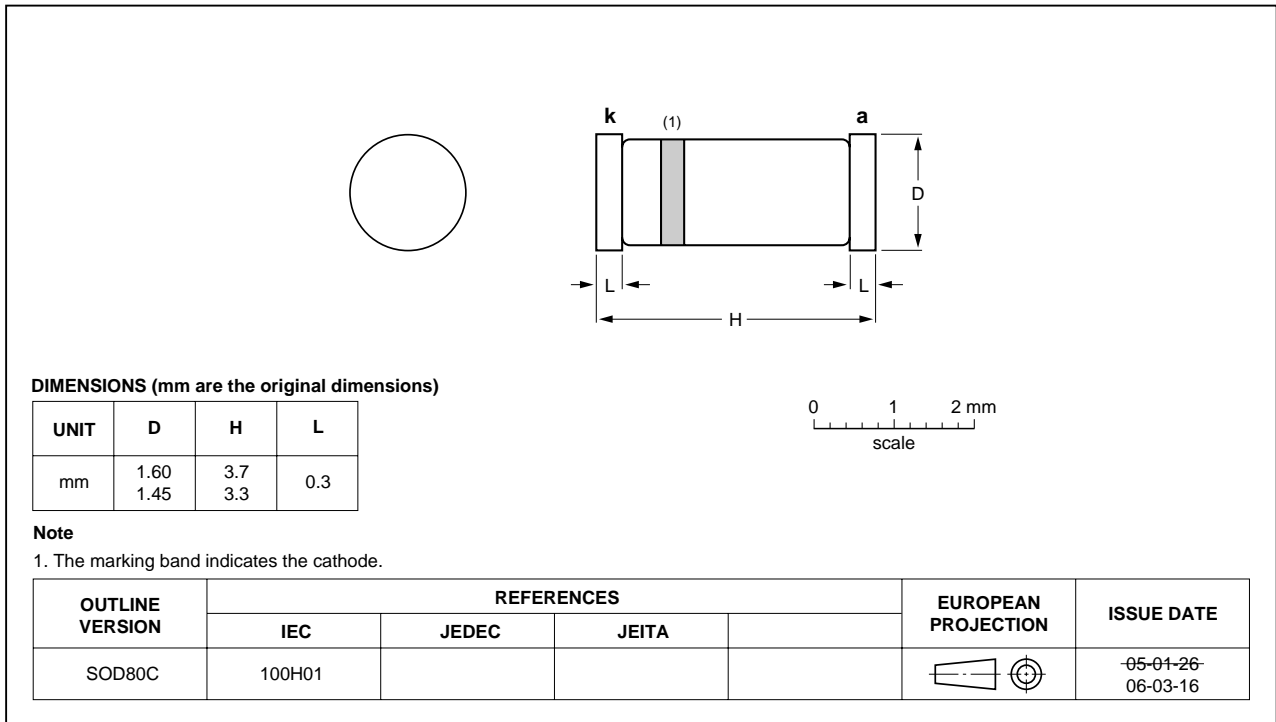


Fig 6. Package outline SOD80C

## 9. Packing information

**Table 10. Packing methods**


The indicated -xxx are the last three digits of the 12NC ordering code.<sup>[1]</sup>

| Type number                | Package | Description                    | Packing quantity |       |
|----------------------------|---------|--------------------------------|------------------|-------|
|                            |         |                                | 2500             | 10000 |
| BZV55-B2V4 to<br>BZV55-C75 | SOD80C  | 4 mm pitch, 8 mm tape and reel | -115             | -135  |


[1] For further information and the availability of packing methods, see [Section 13](#).



**10. Soldering**

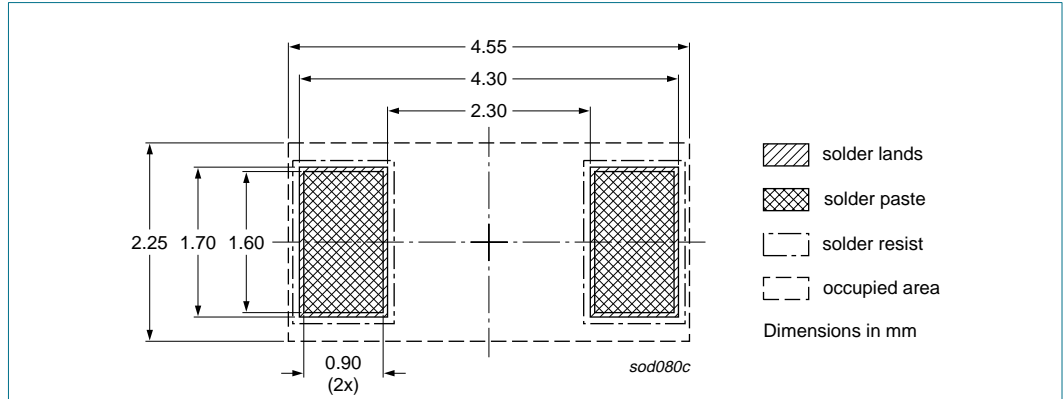

**Fig 7. Reflow soldering footprint SOD80C**

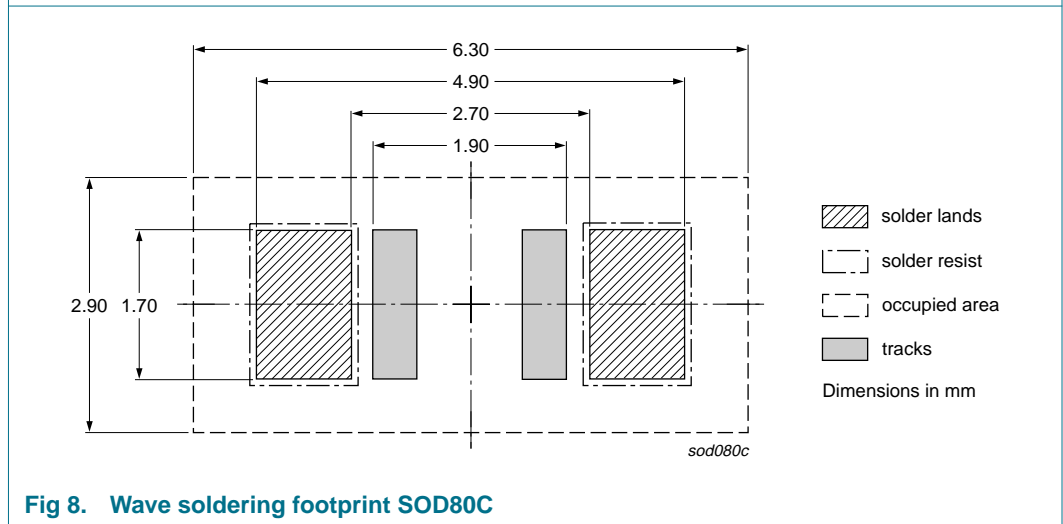

**Fig 8. Wave soldering footprint SOD80C**

## 11. Revision history

Table 11. Revision history

| Document ID    | Release date  | Data sheet status     | Change notice  | Supersedes |
|----------------|---|-----------------------|----------------|------------|
| BZV55_SER_4    | 20070719  | Product data sheet    | CPCN200508022F | BZV55_3    |
| Modifications: | <ul style="list-style-type: none"> <li>• The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors.</li> <li>• Legal texts have been adapted to the new company name where appropriate.</li> <li>• <a href="#">Section 4 “Marking”</a>: enhanced as per CPCN200508022F</li> <li>• <a href="#">Table 5</a>: <math>I_F</math> continuous forward current redefined to forward current</li> <li>• <a href="#">Table 6</a>: <math>R_{th(j-tp)}</math> thermal resistance from junction to tie-point redefined to <math>R_{th(j-t)}</math></li> <li>• <a href="#">Figure 1</a>: amended</li> <li>• <a href="#">Section 9 “Packing information”</a>: added</li> <li>• <a href="#">Section 12 “Legal information”</a>: updated</li> </ul> |                       |                |            |
| BZV55_3        | 20020228  | Product specification | -              | BZV55_2    |
| BZV55_2        | 19990521  | Product specification | -              | BZV55_1    |
| BZV55_1        | 19960426  | Product specification | -              | -          |

## 12. Legal information

### 12.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 12.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 12.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 13. Contact information

For additional information, please visit: <http://www.nxp.com>

For sales office addresses, send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

**14. Contents**

**1 Product profile . . . . . 1**

1.1 General description . . . . . 1

1.2 Features . . . . . 1

1.3 Applications . . . . . 1

1.4 Quick reference data . . . . . 1

**2 Pinning information . . . . . 1**

**3 Ordering information . . . . . 2**

**4 Marking . . . . . 2**

**5 Limiting values . . . . . 2**

**6 Thermal characteristics . . . . . 2**

**7 Characteristics . . . . . 3**

**8 Package outline . . . . . 8**

**9 Packing information . . . . . 8**

**10 Soldering . . . . . 9**

**11 Revision history . . . . . 10**

**12 Legal information . . . . . 11**

12.1 Data sheet status . . . . . 11

12.2 Definitions . . . . . 11

12.3 Disclaimers . . . . . 11

12.4 Trademarks . . . . . 11

**13 Contact information . . . . . 11**

**14 Contents . . . . . 12**

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



© NXP B.V. 2007.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 19 July 2007

Document identifier: BZV55\_SER\_4