


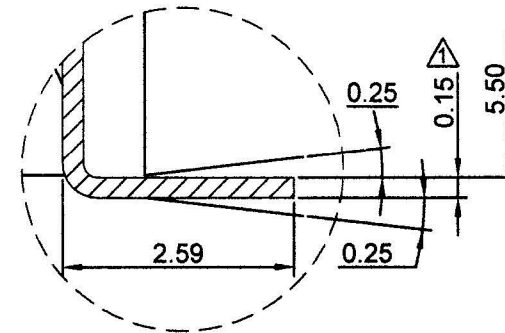


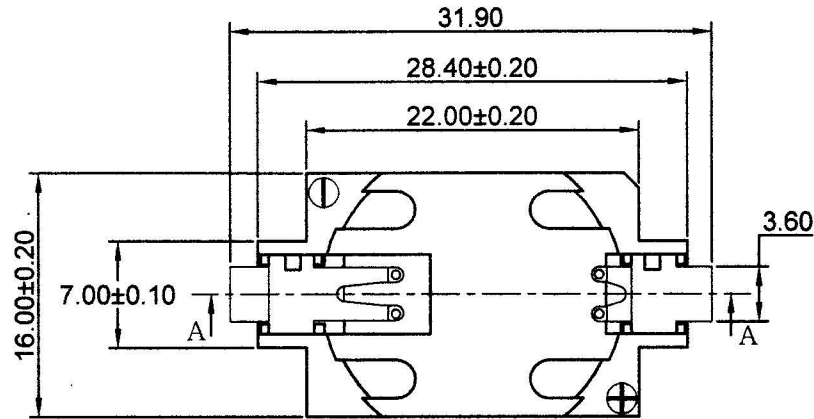

DETAIL "B" S=6

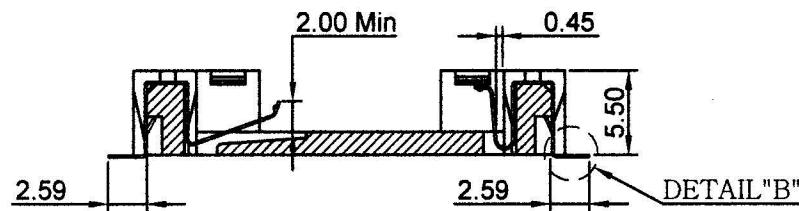

SECTION: A-A

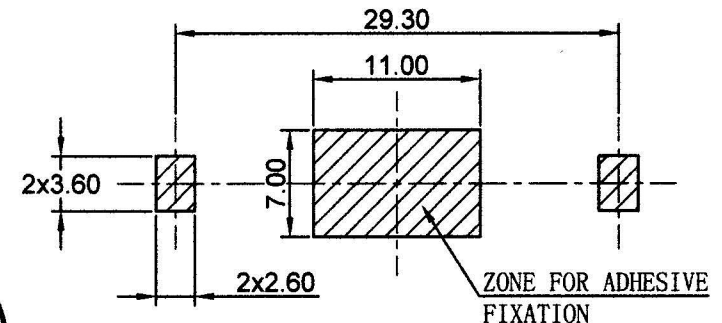

PCB MOUNTING LAYOUT

NOTES

1. MATERIAL:

HOUSING: LCP+30%GF UL94V0 WHITE COLOR
CONTACT: PHOSPHOR BRONZE 0.15 THICKNESS
GOLD 1U" PLATED OVER Ni 50U" MIN

2. CURRENT RATING : 2A (AC/DC)

3. VOLTAGE RATING : 500V (AC/DC)

4. CONTACT RESISTANCE: 30 MILLIOHMS


5. INSULATION RESISTANCE: 500 MEGAOHMS

6. TEMPERATURE RANGE: -55°C TO +85°C

7. HUMIDITY: 40°C AND 90-95% RH FOR 96 HOURS

8. RoHS COMPLIANT



3						
2						
①	Changed contact specification	Aug/30/12	NAME	COIN CELL HOLDER:CH28-2032LF (GOLD CONTACT)		
NO.	MODIFICATION	DATE	SCALE	2:1	APPD	陈明发 8/30/12
General Tolerances		 The Third Angle Projection	UNIT	MM	CHKD	陈明发 8/30/12
0 ~ >3	± 0.10		30 ~ >120	± 0.30	DWN	陈明发 8/30/12
3 ~ >6	± 0.10		120 ~ >400	± 0.50		
6 ~ >30	± 0.20		Angle: ± 3°			
			DATE	MAY. 16. 2008	DR NO	CH28-0508