
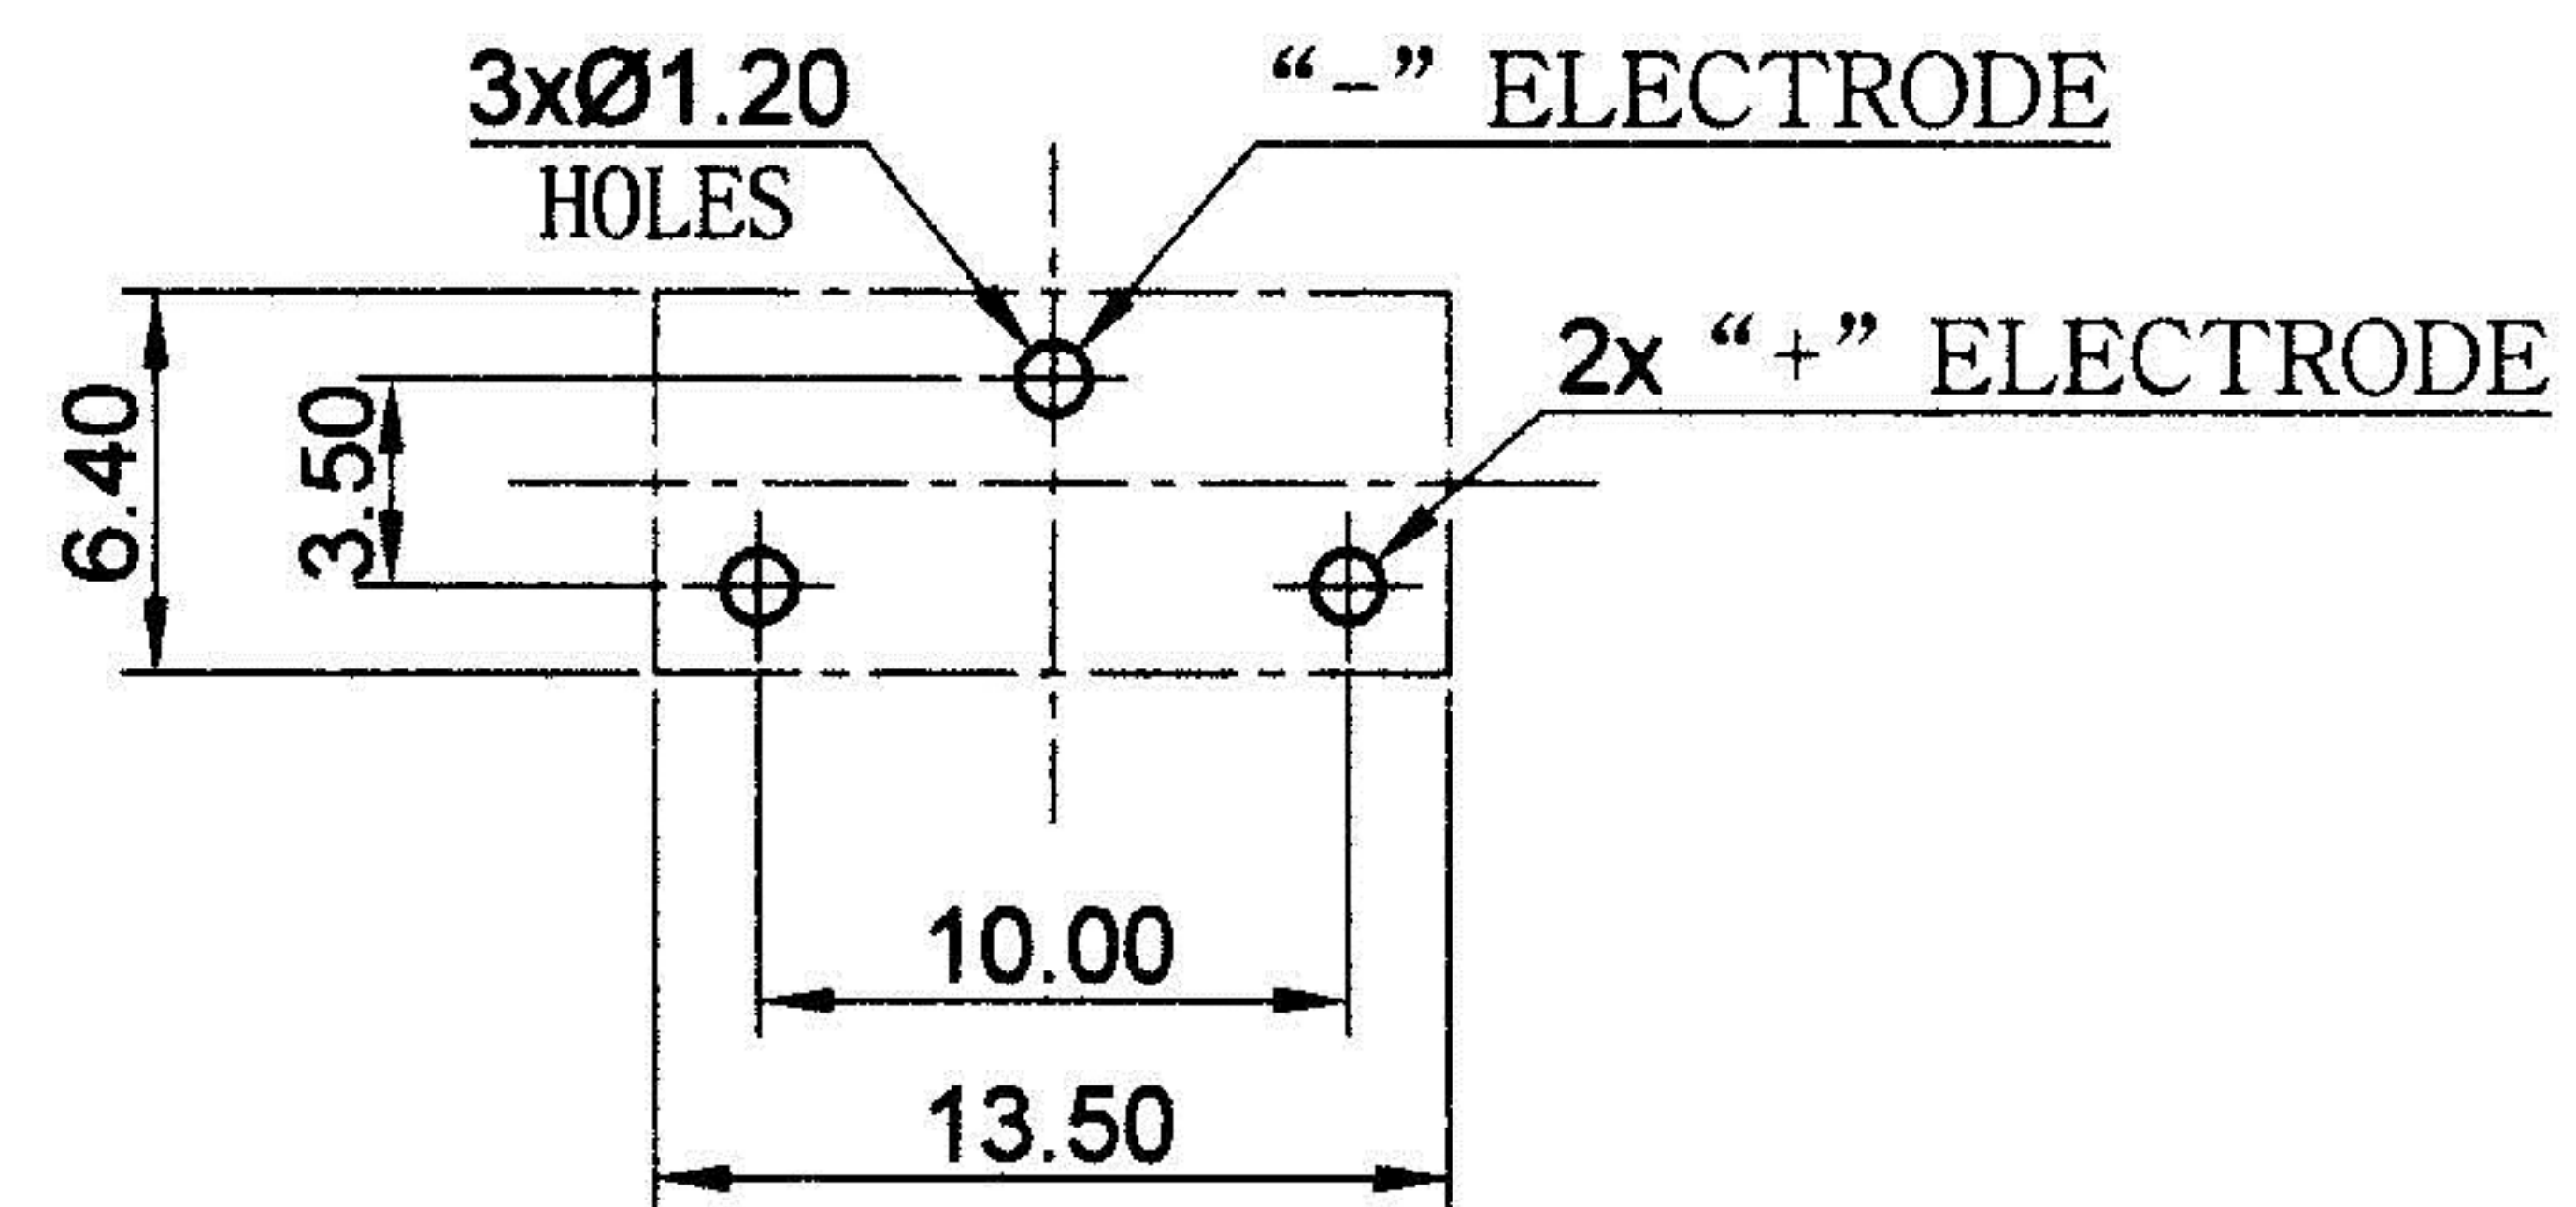
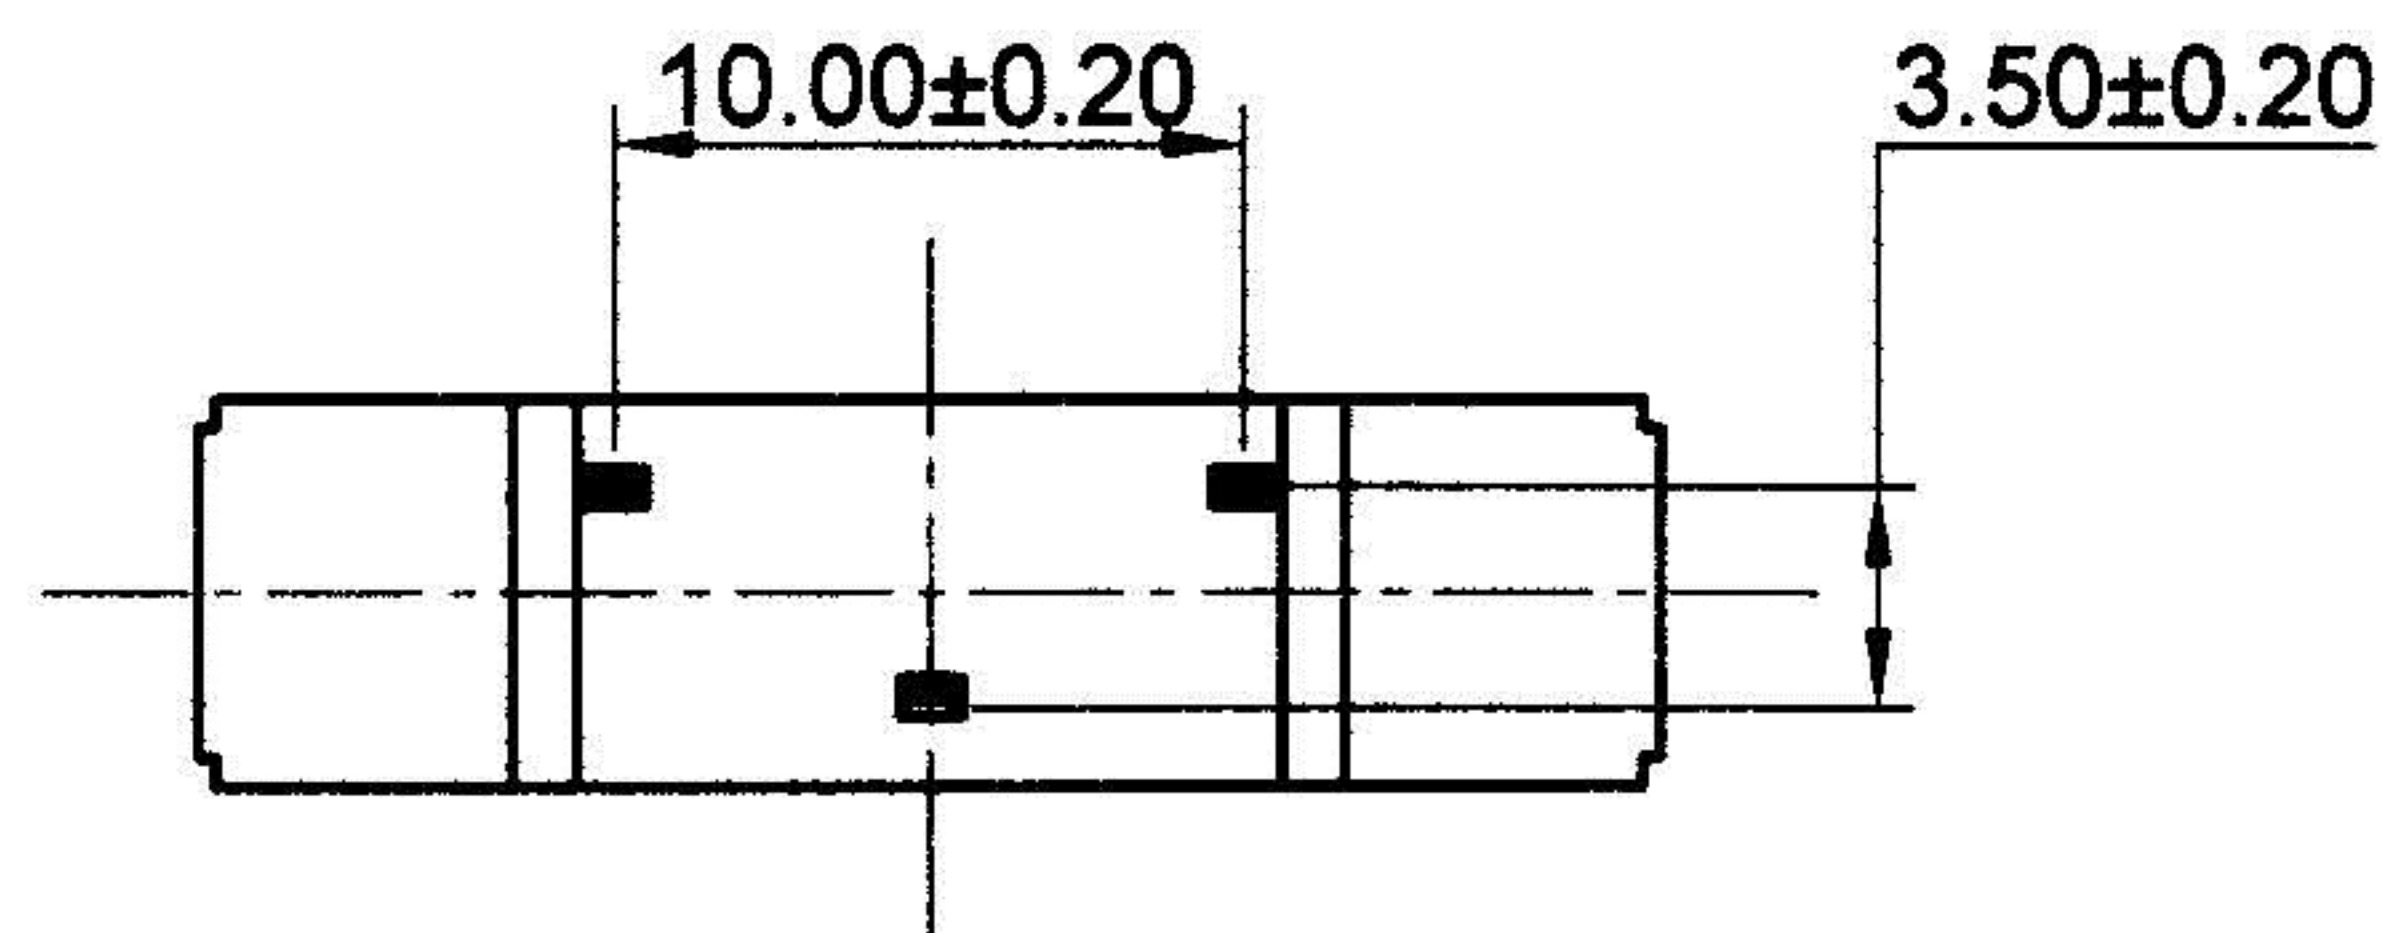
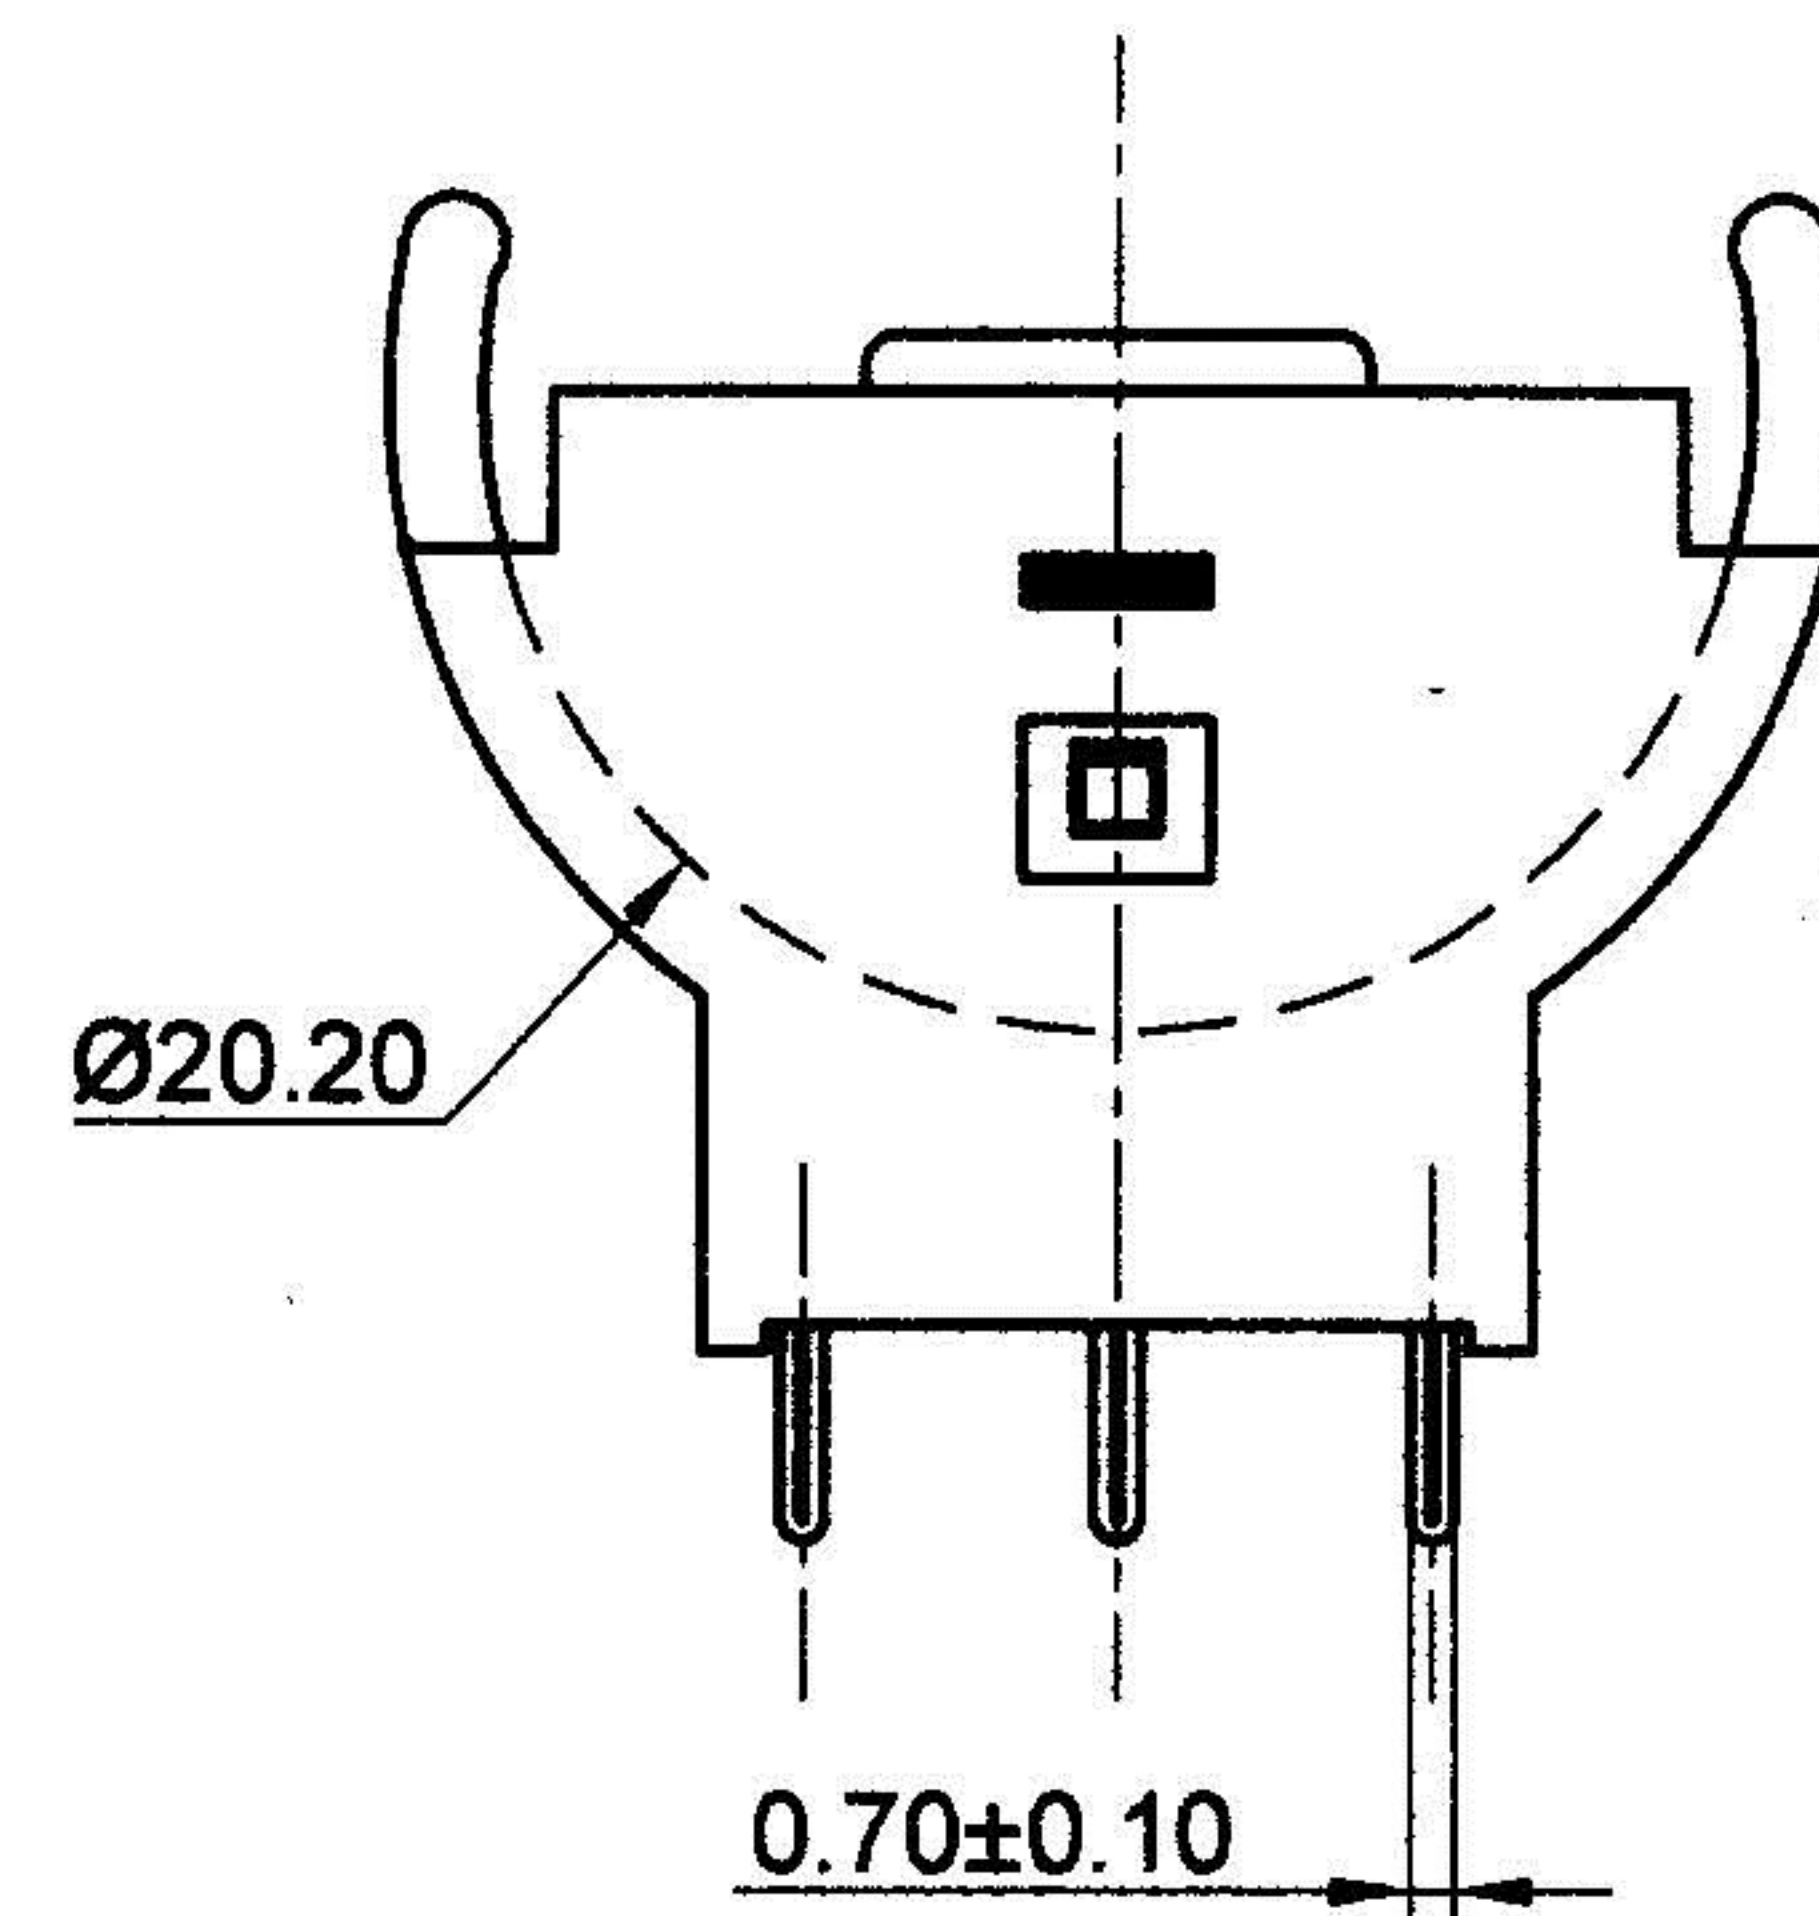
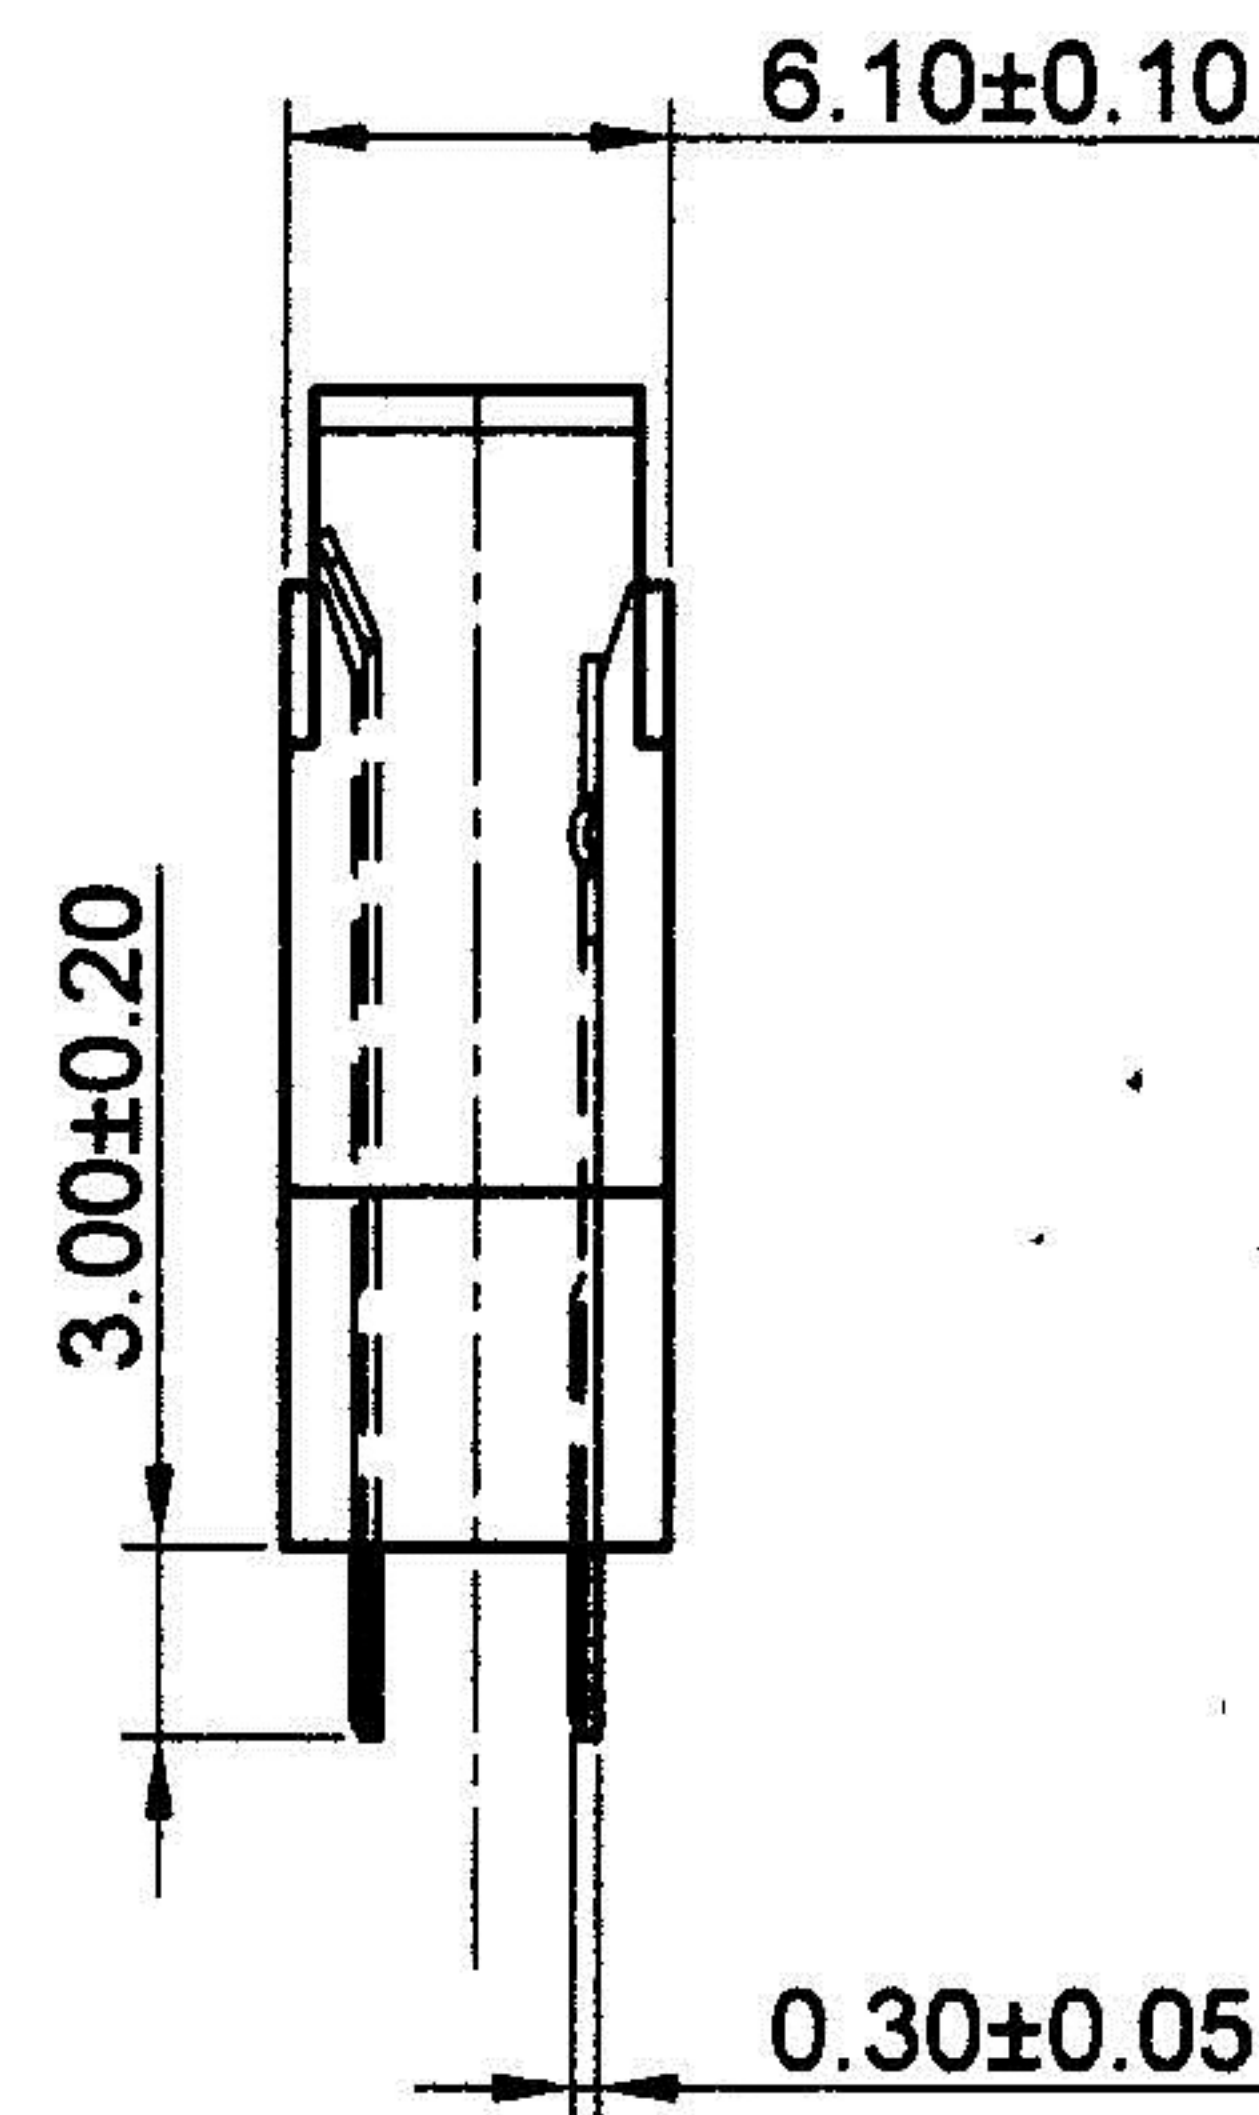


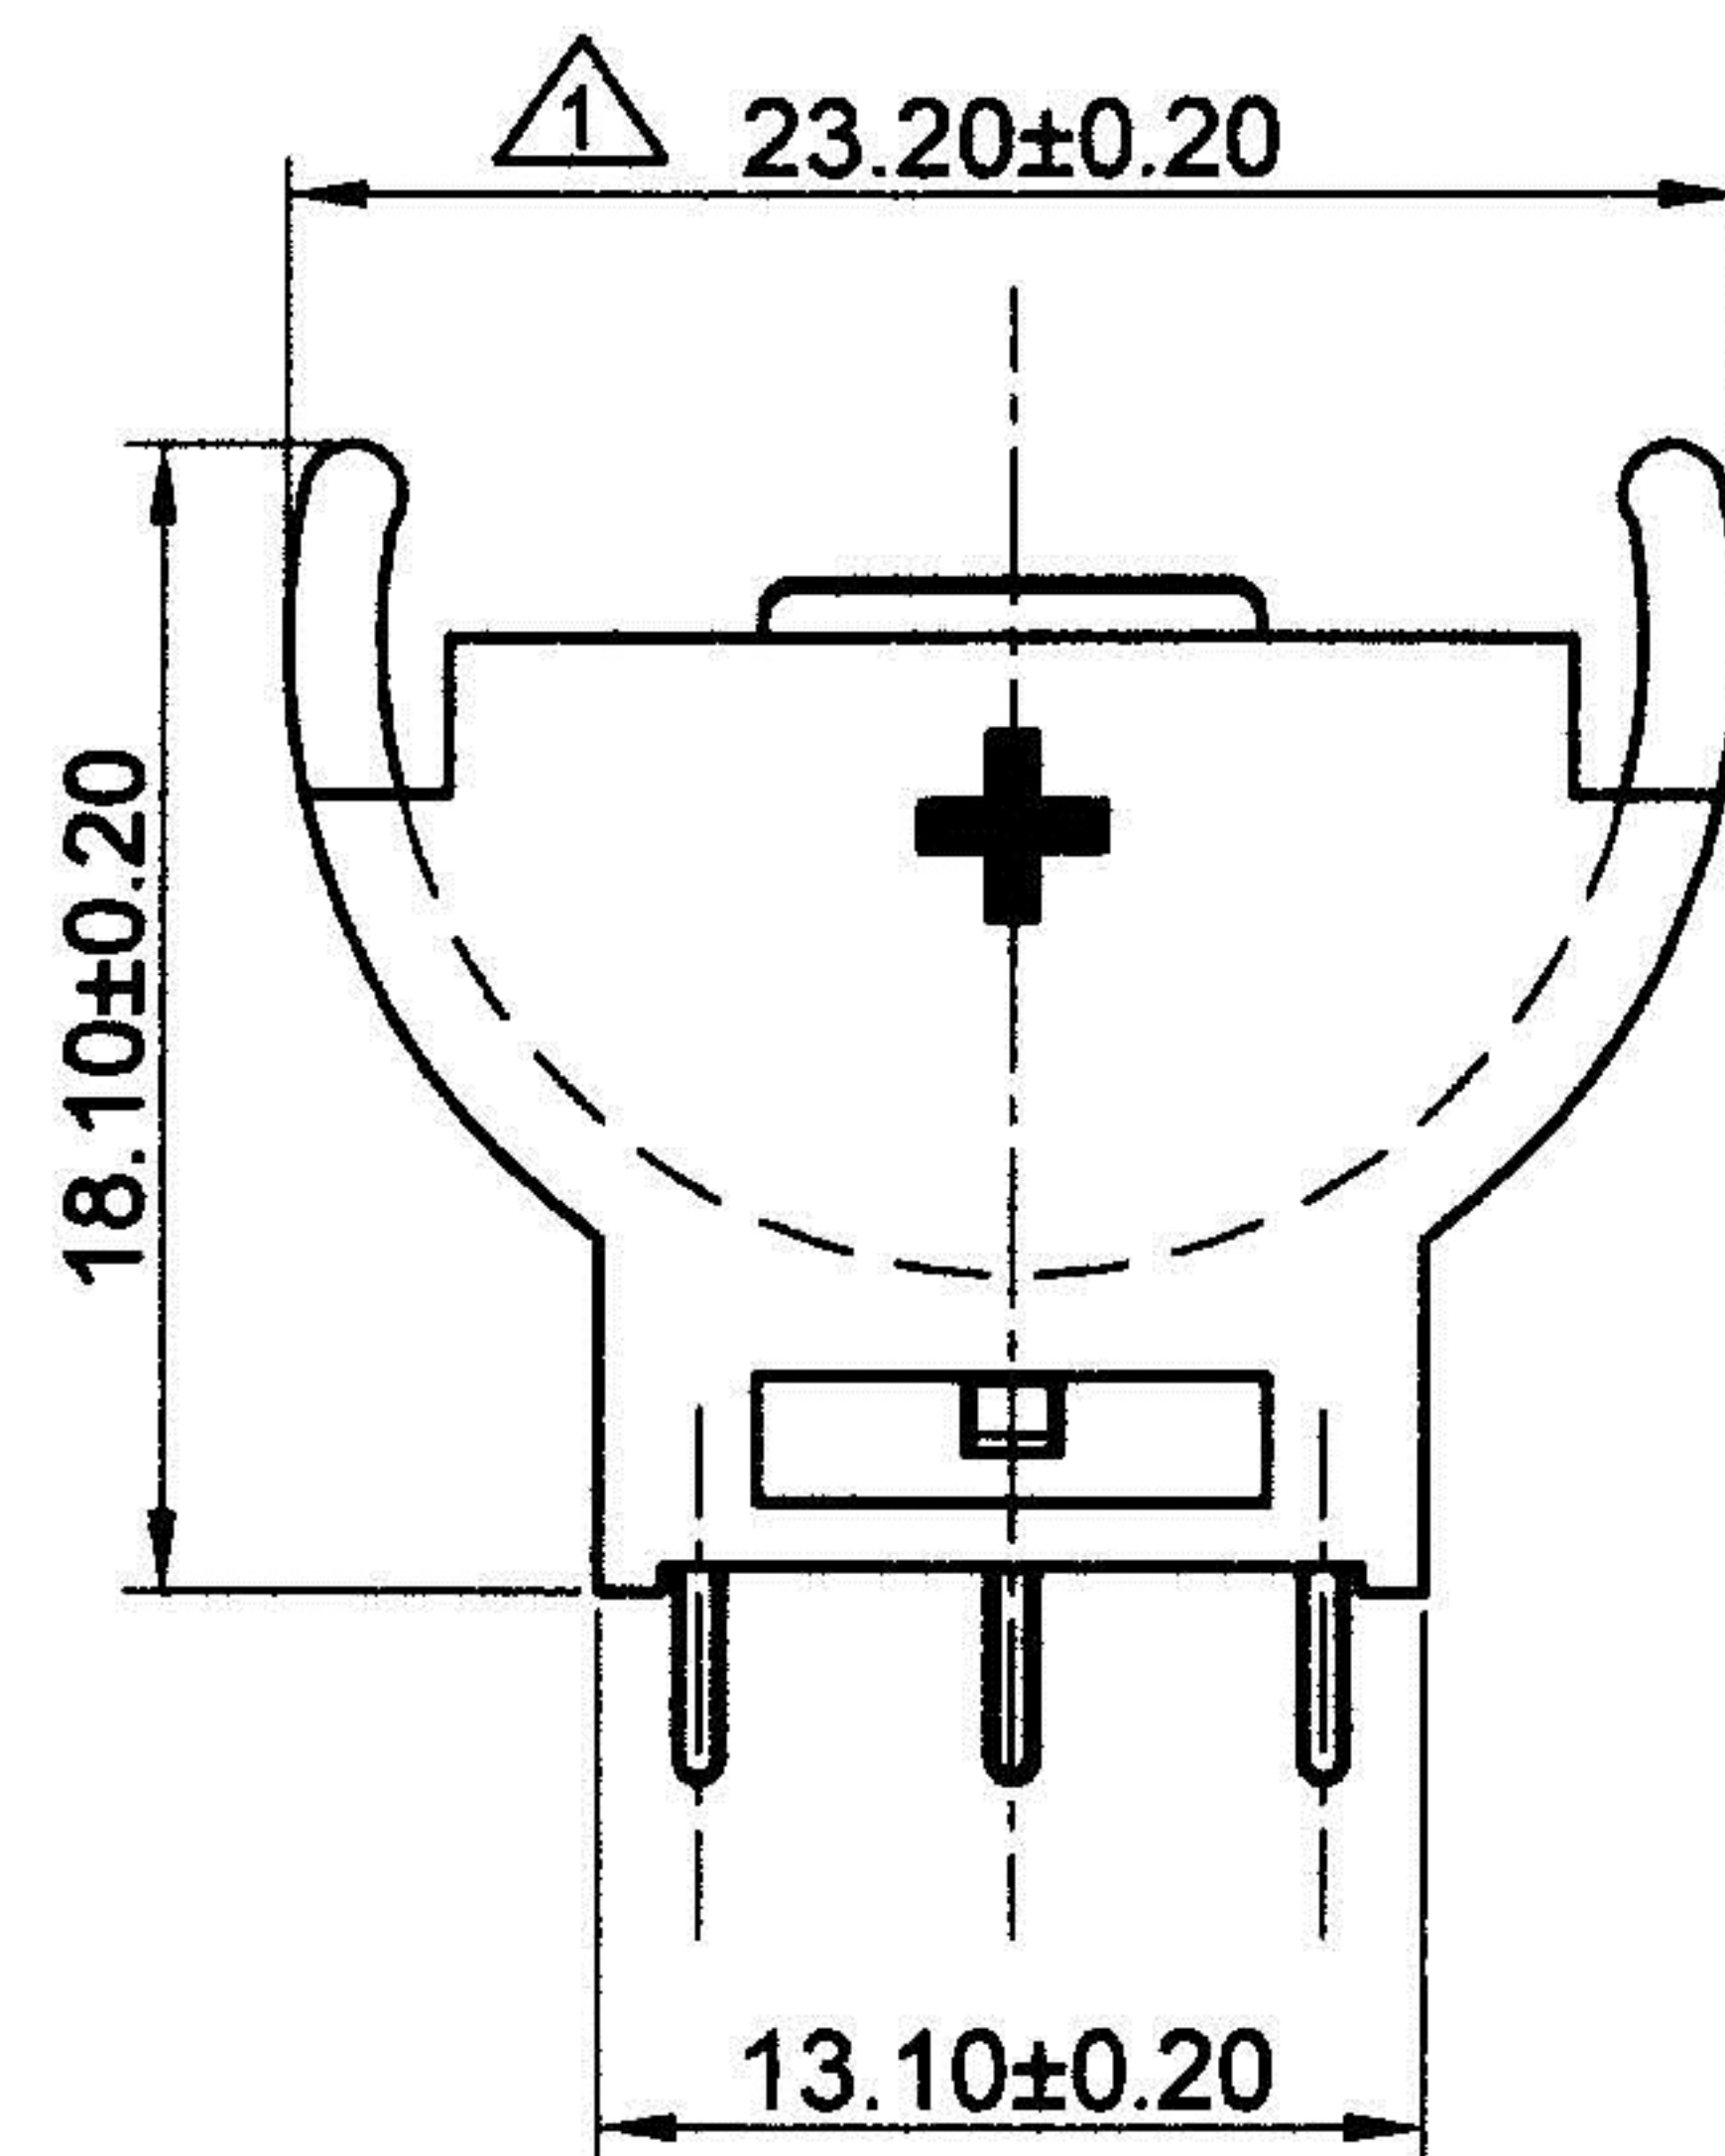


PCB MOUNTING LAYOUT

SPECIFICATION

- (1) ITEM NO. : CH74-2032LF
- (2) HOUSING MATERIAL: NYLON66+30%GF UL94V0 BLACK COLOR
- (3) CONTACT MATERIAL: PHOSPHOR BRONZE 0.25MM THICK NICKEL PLATED
- (4) CURRENT RATING: 3.0A (AC/DC)
- (5) VOLTAGE RATING: 500V (AC/DC)
- (6) CONTACT RESISTANCE: 30 MILLIOHMS
- (7) INSULATION RESISTANCE: 1000 MEGAOHMS
- (8) TEMPERATURE RANGE: -55℃ TO +85℃
- (9) HUMIDITY: 40℃ AND 90~95% RH FOR 96 HOURS
- (10) RoHS COMPLIANT

3						
2						
①	Dim. 23.20 was 22.50	Dec/09/2013	NAME	COIN CELL HOLDER: CH74-2032LF		
NO.	MODIFICATION	DATE	SCALE	2:1	APPD	
General Tolerances			UNIT	MM	CHKD	黄江 2013.12.13
0 ~ >3	± 0.10	30 ~ >120 ± 0.30	MAT'L	SEE NOTES	DWN	黄江 2013.12.13
3 ~ >6	± 0.10	120 ~ >400 ± 0.50	DATE	MAR. 25. 2008	DR NO	CH74-0308
6 ~ >30	± 0.20	Angle: ± 3°				

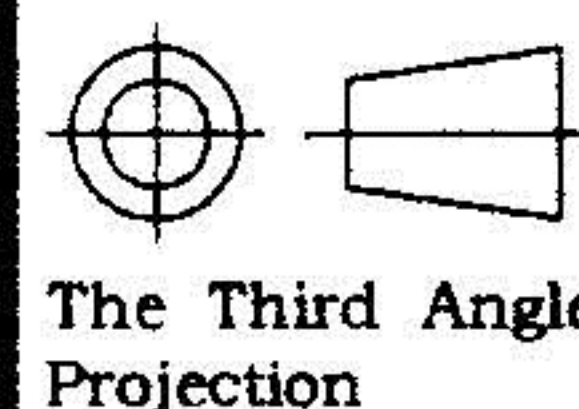

The Third Angle Projection