


**ELECTRICAL CHARACTERISTICS**

Contact Current Rating:3Amperes.  
 Dielectric Withstanding Voltage:AC 500V at sea level.  
 Insulation Resistance:1000Megohms Min.  
 Contact Resistance:30Milliohms Max.  
 Operation Temperature : -55°C to +105°C.

**Material**

Contact :Copper Alloy.  
 Insulator:PBT . [Select PA6T /LCP 7PA9T]  
 Shell: SPCC  
 Z-Piece: Fe  
 Screw: Copper Alloy.  
 Rivet: Copper Alloy or Zinc.

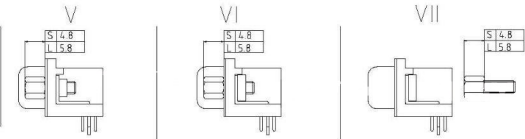

**Note**

No.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

- 1. PRODUCTS:  
C:Connector
- 2. SERIES NO. :  
0550
- 3. CONTACT NO. :  
09,15,25,37
- 4. CONTACT TYPE:  
F:Female
- 5. MOUNTING OPTION:  
A:Boardlock (Z-Shape)  
B:Rivet W/Boardlock (Z-Shape)
- 6. ACCESSORIES:  
B:ADD Screws(4.8\*11.8)  
C:Fix Screws(4.8\*11.8)  
D:ADD Screws(5.8\*12.0)  
E:Fix Screws(5.8\*12.0)
- 7. SHELL PLATING:  
T:Tin  
N:Nickel
- 8. CONTACT PLATING:  
S:Selective Gold  
G:Gold Flash  
A:Gold 5U"  
B:Gold 10U"  
C:Gold 15U"  
D:Gold 30U"  
9. OTHERS:  
B:Black Insulator  
L:Blue Insulator  
10.ROHS LOW-LEAD

<b>RoHS Compliant</b>		<b>TAIWAN MAKE</b>	
APPD. 標準 <b>HELEN</b>		TOLERANCE X ±0.30 XX ±0.25 XXX ±0.150 4Imp. ±.2"	PART NAME 品名 <b>D-SUB 7.2MM FEMALE</b>
DWG. 製圖 <b>ABBY</b>		SCALE 比例 參考 UNIT 單位 <b>MM</b> SIZE 紙張尺寸 <b>A4</b>	
DATE 制表日 2011/05/25	PAGE 張數 1 OF 1	REV. 版本 <b>A</b>	PART NO. 料號 <b>106 SERIES</b>