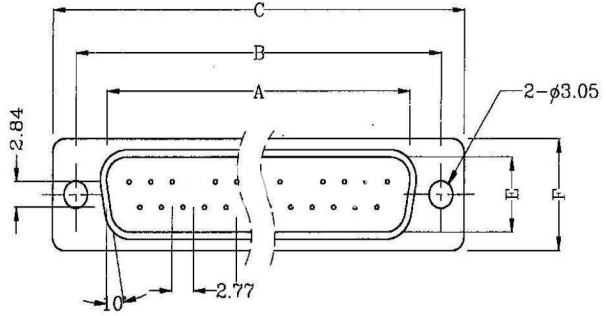

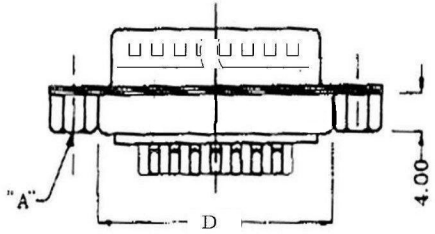



MATERIAL:

Insulator: PBT+30% Glass Fiber UL94V-0

Pin contacts: Brass or Phosphor Bronze Gold Plated & Tin plated

Shell: Steel,SPCC Nickel & Tin Plated

ELECTRICAL DATA:

Rtaed Voltage: 350V AC

Rated Current: 5A

Withstand Voltage: 500V AC(RMS)

Insulation Resistance: Over 1000 MΩ

Contact Resistance: 5 MΩ AT 1A

Temperature: -40℃~100℃

DIM "A"
#4-40UNC
M3*0.5
M2.6*0.45

DIM M/F	A ±0.13	B ±0.10	C ±0.13	D ±0.10	E ±0.13	F ±0.10	G ±0.13
09	16.90	25.00	30.80	19.30	8.40	12.50	10.70
15	25.30	33.30	39.10	27.50	8.40	12.50	10.70
25	39.00	47.00	53.00	41.30	8.40	12.50	10.70
37	55.40	63.50	69.30	57.70	8.40	12.50	10.70
50	52.80	61.10	66.90	55.30	11.10	15.40	13.60

RoHS Compliant

TAIWAN MAKE

APPD. 核准 BETTY	SCALE 比例 參考	TOLERANCE 容許公差 ±0.2mm	PART NAME 品名 D-SUB SOLDER TYPE
DWG. 製圖 KAREN	UNIT 單位 MM	SIZE. 紙張尺寸 A4	
DATE 制表日 2012/05/29	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 101 SERIES