

# MAX ECHO 鈺鎧科技股份有限公司規格標準書

## COMPONENT SPECIFICATION

版次：第3版

MAX ECHO

|      |                           |                         |                    |     |
|------|---------------------------|-------------------------|--------------------|-----|
| NAME | MULTILAYER CHIP INDUCTORS | COMPOSITE SPECIFICATION |                    | 1/8 |
|      | EBLS-2012                 | SPEC#                   | EBLS2012-4R7K 0.1A |     |

### 1. SCOPE

This specification applies to the EBLs-2012 series Multilayer Chip Inductors

### 2. STANDARD ATMOSPHERIC CONDITIONS

Unless otherwise specified the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature :  $20 \pm 15^{\circ}\text{C}$

Relative humidity : 30~70%

If there may be any doubt on the results, measurements shall be made within the following limits :


Ambient temperature :  $25 \pm 5^{\circ}\text{C}$

Relative humidity : 30~70%

### 3. RATINGS

| PART NO            | INDUCTANCE                 | Q   | SELF-RESONANT<br>FREQUENCY(MHz) | DC RESISTANCE    | RATED CURRENT |
|--------------------|----------------------------|-----|---------------------------------|------------------|---------------|
|                    | AT 10 MHz 250mV            | Min | Min                             | ( $\Omega$ ) Max | (mA)Max       |
| EBLS2012-4R7K 0.1A | $4.7 \mu\text{H} \pm 10\%$ | 45  | 35                              | 0.7              | 100           |

### 4. DIMENSION



OPERATING TEMP. RANGE :  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

STORAGE TEMP. RANGE :  $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$

| TYPE      | L                                  | W                                   | T                                   | A(m/m)  |
|-----------|------------------------------------|-------------------------------------|-------------------------------------|---------|
| EBLS-2012 | $2.0 \pm 0.2$<br>(.079 $\pm$ .008) | $1.25 \pm 0.2$<br>(.049 $\pm$ .008) | $1.25 \pm 0.2$<br>(.049 $\pm$ .008) | 0.2~0.8 |

5. The place of origin :  
Taichung, Taiwan

|            |            |               |                                                                                                                      |       |       |
|------------|------------|---------------|----------------------------------------------------------------------------------------------------------------------|-------|-------|
| HISTORY    | DATE       | REVISION      |                                                                                                                      | SIGN. | SIGN. |
| PLANNED BY | CHECKED BY | APPROVED BY   | <div style="border: 1px solid black; padding: 5px; text-align: center;">             鈺鎧文件中心<br/>發行章           </div> |       |       |
| JSHING     | <b>HSU</b> | Chi Chi Huang |                                                                                                                      |       |       |

表格編號：034承認書 A

MAX ECHO

鈺鎧科技股份有限公司規格標準書


COMPONENT SPECIFICATION

版次：第3版


MAX ECHO

|      |                           |                         |       |       |
|------|---------------------------|-------------------------|-------|-------|
| NAME | MULTILAYER CHIP INDUCTORS | COMPOSITE SPECIFICATION |       | 2 / 8 |
|      | EBLS-2012                 | SPEC#                   | EBLS- |       |


INDUCTANCE VS DC SUPERPOSITION CHARACTERISTICS

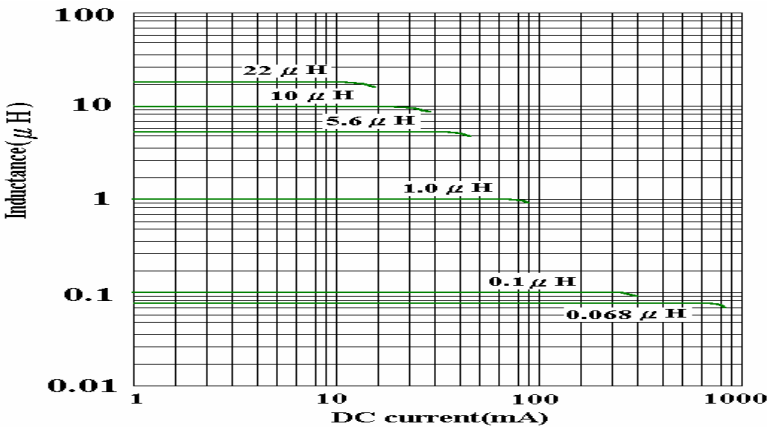

IMPEDANCE VS FREQUENCY CHARACTERISTICS

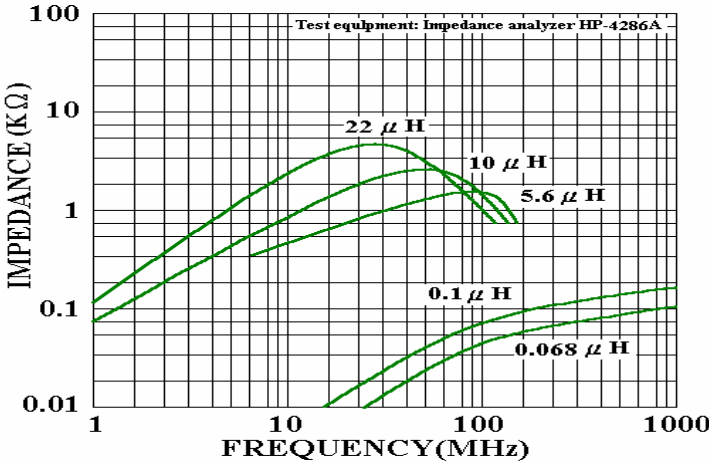

Q VS FREQUENCY CHARACTERISTICS

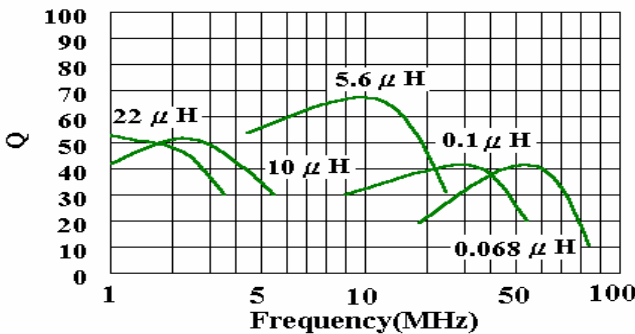

# MAX ECHO 鈺鎧科技股份有限公司規格標準書

## COMPONENT SPECIFICATION


版次：第3版

MAX ECHO


|      |                                            |                         |                    |       |
|------|--------------------------------------------|-------------------------|--------------------|-------|
| NAME | MULTILAYER CHIP INDUCTORS<br><br>EBLS-2012 | COMPOSITE SPECIFICATION |                    | 3 / 8 |
|      |                                            | SPEC#                   | EBLS2012-4R7K 0.1A |       |

### 6) Reflow soldering conditions

- Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max. Unenough pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.
- Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode, When soldering is repeated, allowable time is the accumulated time.

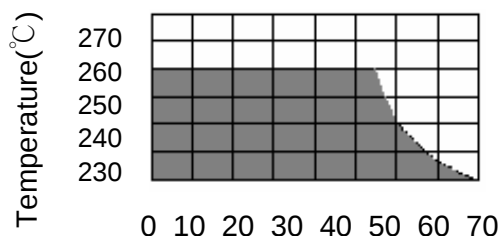

### Temperature Profile

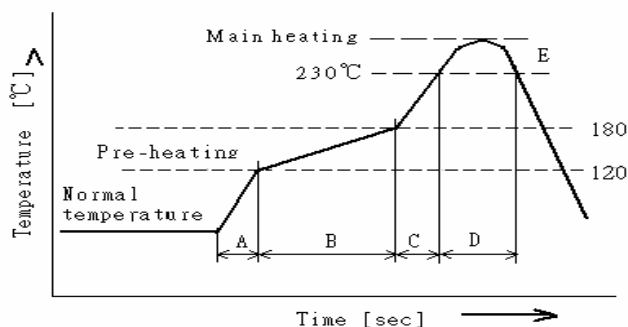

|                 |                     |            |        |
|-----------------|---------------------|------------|--------|
| A               | Slope of temp. rise | 1 to 5     | °C/sec |
| B               | Heat time           | 50 to 150  | sec    |
|                 | Heat temperature    | 120 to 180 | °C     |
| C               | Slope of temp. rise | 1 to 5     | °C/sec |
| D               | Time over 230°C     | 90~120     | sec    |
| E               | Peak temperature    | 255~260    | °C     |
|                 | Peak hold time      | 10 max.    | sec    |
| No. of mounting |                     | 3          | times  |

(Melting area of solder)

### 6-1 Reworking with soldering iron


|                       |                |
|-----------------------|----------------|
| Preheating            | 150°C, 1minute |
| Tip temperature       | 280°C max      |
| Soldering time        | 3seconds max.  |
| Soldering iron output | 30w max.       |
| End of soldering iron | ∅ 3mm max.     |

- Reworking should be limited to only one time.

Note : Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the ferrite material due to the thermal shock.

### 6-2 Solder Volume

Solder shall be used not to be exceed the upper limits as shown below.

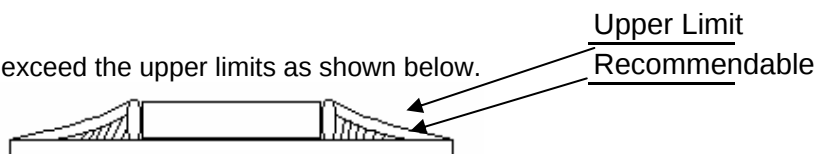

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.

# MAX ECHO 鈺鎧科技股份有限公司規格標準書

## COMPONENT SPECIFICATION

版次：第3版

MAX ECHO

|      |                                            |                         |                    |       |
|------|--------------------------------------------|-------------------------|--------------------|-------|
| NAME | MULTILAYER CHIP INDUCTORS<br><br>EBLS-2012 | COMPOSITE SPECIFICATION |                    | 4 / 8 |
|      |                                            | SPEC#                   | EBLS2012-4R7K 0.1A |       |

### 7 EQUIPMENT



#### 7-1 IMPEDANCE

Impedance shall be measured with HP – 4286A impedance analyzer or equivalent system

#### 7-2 DC RESISTANCE

DC resistance shall be measured using HP 4338 digital mili – ohm meter with 4 terminal method.

### 8.MECHANICAL CHARACTERISTICS
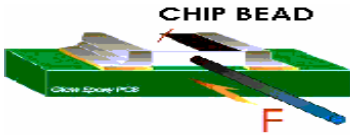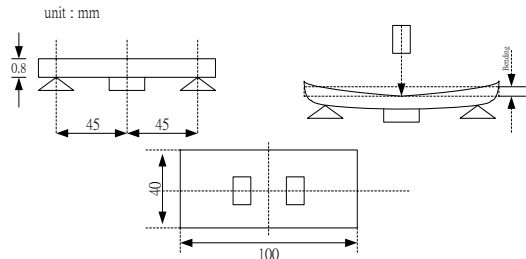
| ITEM                      | Specification                                                                                                                                            | TEST CONDITIONS                                                                                                                                                                                                                                                                                  |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TERMINAL STRENGTH         | Without deformation cases impedance shall be satisfied $\pm 30\%$ DC resistance shall be satisfied.                                                      | Solder chip on PCB and applied 10N (1.02Kgf) for 10 sec<br>                                                                                                                                                   |
| Substrate bending test    | Without deformation cases, inductance shall be satisfied $\pm 20\%$ DC resistance shall be satisfied.                                                    | After soldering a chip to a test substrate, bend the substrate by 3mm hold for 10s and then return.<br>Soldering shall be done in accordance with the recommended PC board pattern and reflow soldering.<br> |
| RESISTANCE TO SOLDER HEAT | No visible damage<br>Electrical characteristics and mechanical characteristics shall be satisfied.<br><br><b>Consult standard MIL-STD-202 METHOD 210</b> | Solder Temp. : $265 \pm 3^\circ\text{C}$<br>Immersion time : $6 \pm 1$ sec<br>Preheating : $100^\circ\text{C}$ to $150^\circ\text{C}$ , 1 minute.<br>Measurement to be made after keeping at room temp for $24 \pm 2$ hrs.<br>Solder : Sn-3Ag-0.5Cu                                              |
| SOLDER – ABILITY          | 95% min. coverage of all metallized area<br><br><b>Consult standard J-STD-002</b>                                                                        | Solder temp. : $240 \pm 5^\circ\text{C}$<br>Immersion time : $3 \pm 1$ sec<br>Solder : Sn-3Ag-0.5Cu                                                                                                                                                                                              |

# MAX ECHO 鈺鎧科技股份有限公司規格標準書

## COMPONENT SPECIFICATION

版次：第3版

MAX ECHO

|                                                                                |                           |                         |                    |     |
|--------------------------------------------------------------------------------|---------------------------|-------------------------|--------------------|-----|
| NAME                                                                           | MULTILAYER CHIP INDUCTORS | COMPOSITE SPECIFICATION |                    | 5/8 |
|                                                                                | EBLS-2012                 | SPEC#                   | EBLS2012-4R7K 0.1A |     |
| 9. RELIABILITY AND TEST CONDITIONS                                             |                           |                         |                    |     |
| 9-1 HIGH TEMPERATURE RESISTANCE                                                |                           |                         |                    |     |
| a. Performance specification                                                   |                           |                         |                    |     |
| 1.Appearance : no mechanical damage                                            |                           |                         |                    |     |
| 2.Inductance shall be with ±20% of the initial value                           |                           |                         |                    |     |
| b.Test condition                                                               |                           |                         |                    |     |
| 1.Temperature +85℃±2℃                                                          |                           |                         |                    |     |
| 2.Applied current : Rated current                                              |                           |                         |                    |     |
| 3.Testing time : 1008±12hrs (maximum value)                                    |                           |                         |                    |     |
| 4.Measurement : After placing at room ambient temperature for 24 hours minimum |                           |                         |                    |     |
| 9-2 HUMIDITY RESISTANCE                                                        |                           |                         |                    |     |
| a.Performance specification                                                    |                           |                         |                    |     |
| 1.Appearance : no mechanical damage                                            |                           |                         |                    |     |
| 2.Inductance shall be with ±20% of the initial value                           |                           |                         |                    |     |
| b.Test condition                                                               |                           |                         |                    |     |
| 1.Humidity : 90 to 95% RH                                                      |                           |                         |                    |     |
| 2.Temperature : 60±2℃                                                          |                           |                         |                    |     |
| 3.Applied current : Rated current (maximum value)                              |                           |                         |                    |     |
| 4.Testing time : 1008±12hours                                                  |                           |                         |                    |     |
| 5.Measurement : After placing at room ambient temperature for 24 hours minimum |                           |                         |                    |     |
| 9-3 TEMPERATURE CYCLE                                                          |                           |                         |                    |     |
| a.Performance specification                                                    |                           |                         |                    |     |
| 1.Appearance : no mechanical damage                                            |                           |                         |                    |     |
| 2.Inductance shall be with ±20% of the initial value                           |                           |                         |                    |     |
| b.Test condition                                                               |                           |                         |                    |     |
| 1.Temperature -40℃,+85℃ kept stabilized for 30 minutes each                    |                           |                         |                    |     |
| 2.Cycle : 100 cycles                                                           |                           |                         |                    |     |
| 3.Measurement : After placing for 24hours minimum at room ambient temperature  |                           |                         |                    |     |
| 4. step1. -40℃ temp±3℃ 30±3 minutes                                            |                           |                         |                    |     |
| step2. Room temperature 2to5 minutes                                           |                           |                         |                    |     |
| step3. +85℃ temp±2℃ 30±3 minutes                                               |                           |                         |                    |     |
| step4. room temperature 2to5 minutes                                           |                           |                         |                    |     |
| 9-4 LOW TEMPERATURE STORAGE LIFE TEST                                          |                           |                         |                    |     |
| a.Performance specification                                                    |                           |                         |                    |     |
| 1.Appearance : no mechanical damage                                            |                           |                         |                    |     |
| 2.Inductance shall be with ±20% of the initial value                           |                           |                         |                    |     |
| b.Test condition                                                               |                           |                         |                    |     |
| 1.Temperature -40℃±2℃                                                          |                           |                         |                    |     |
| 2.Testing time : 1008±12hours                                                  |                           |                         |                    |     |
| 3.Measurement : After placing for 24 hours minimum at room ambient temperature |                           |                         |                    |     |
| 9-5 THERMAL SHOCK                                                              |                           |                         |                    |     |
| a.Performance specification                                                    |                           |                         |                    |     |
| 1.Appearance : no mechanical damage                                            |                           |                         |                    |     |
| 2.Inductance shall be with ±20% of the initial value                           |                           |                         |                    |     |
| b.Test condition                                                               |                           |                         |                    |     |
| 1.Temperature -40℃,+85℃ kept stabilized for 30 minutes each                    |                           |                         |                    |     |
| 2.Cycle : 100 cycles                                                           |                           |                         |                    |     |
| 3.Measurement : After placing for24 hours minimum at room ambient temperature  |                           |                         |                    |     |
| 9-6 VIBRATION TEST                                                             |                           |                         |                    |     |
| a.Performance specification                                                    |                           |                         |                    |     |
| 1.Appearance : no mechanical damage                                            |                           |                         |                    |     |
| 2.Inductance shall be with ±20% of the initial value                           |                           |                         |                    |     |
| b.Test condition                                                               |                           |                         |                    |     |
| 1.Waveform:Sine wave                                                           |                           |                         |                    |     |
| 2.Frequency:10~55~10 Hz                                                        |                           |                         |                    |     |
| 3.Sweep time:1min                                                              |                           |                         |                    |     |
| 4.Amplitude:1.5mm(peak-peak)                                                   |                           |                         |                    |     |
| 5.Direction:X,Y,Z(3 axes)                                                      |                           |                         |                    |     |
| 6.Duration:2 hrs./axis,total 6 hrs.                                            |                           |                         |                    |     |

MAX ECHO 鈺鎧科技股份有限公司規格標準書


COMPONENT SPECIFICATION

版次：第3版




MAX ECHO

|      |                           |                         |                    |       |
|------|---------------------------|-------------------------|--------------------|-------|
| NAME | MULTILAYER CHIP INDUCTORS | COMPOSITE SPECIFICATION |                    | 6 / 8 |
|      | EBLS-2012                 | SPEC#                   | EBLS2012-4R7K 0.1A |       |

10. EMBOSSED CARRIER TAPE PACKAGING

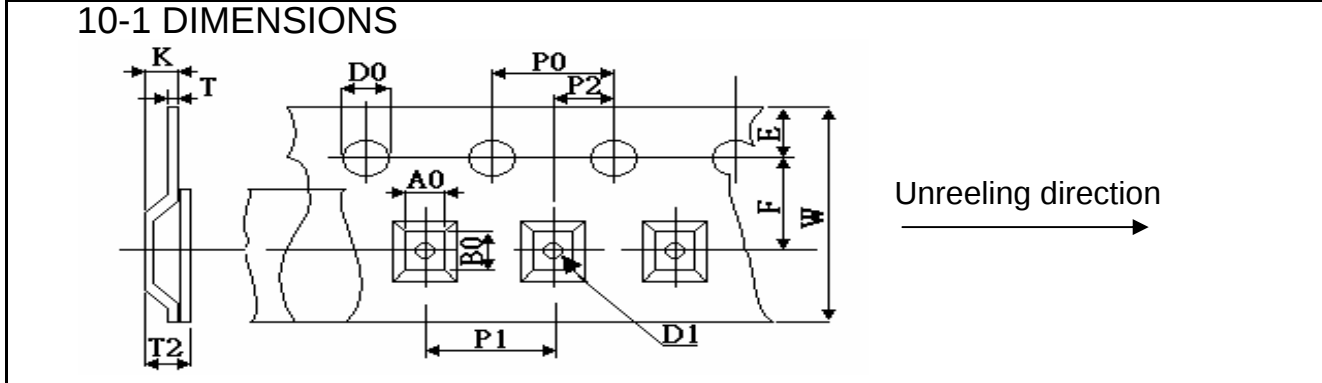

| A0   | B0   | W    | F     | E    | P1   | P2    | P0   | D0    | D1   | K    | T     | T2   |
|------|------|------|-------|------|------|-------|------|-------|------|------|-------|------|
| 1.47 | 2.29 | 8.0  | 3.5   | 1.75 | 4.0  | 1.55  | 4.0  | 2.00  | 1.00 | 1.45 | 0.2   | 1.47 |
| ±0.1 | ±0.1 | ±0.2 | ±0.05 | ±0.1 | ±0.1 | ±0.05 | ±0.1 | ±0.05 | ±0.1 | ±0.1 | ±0.05 | ±0.1 |

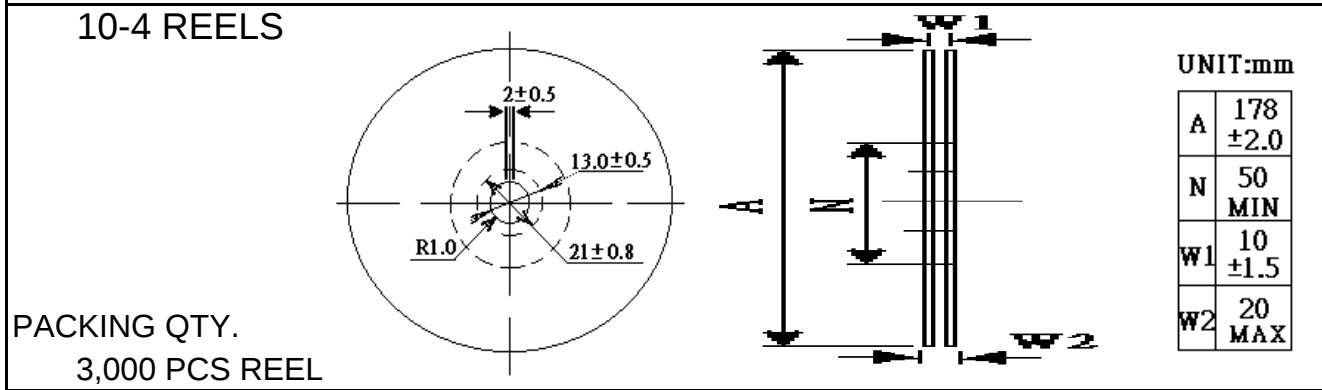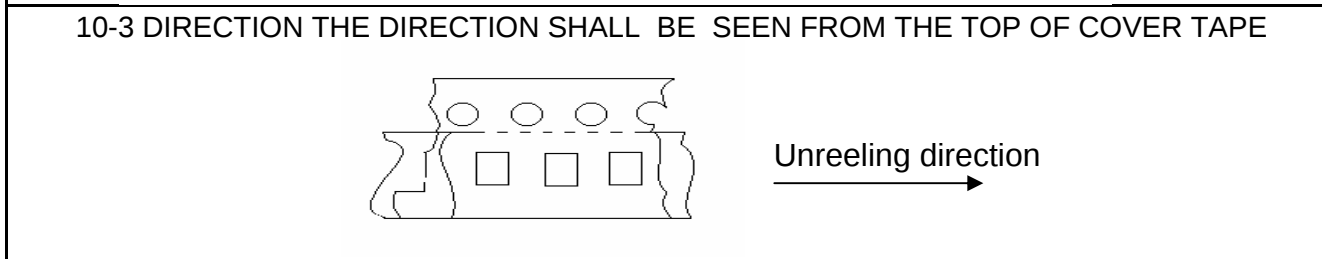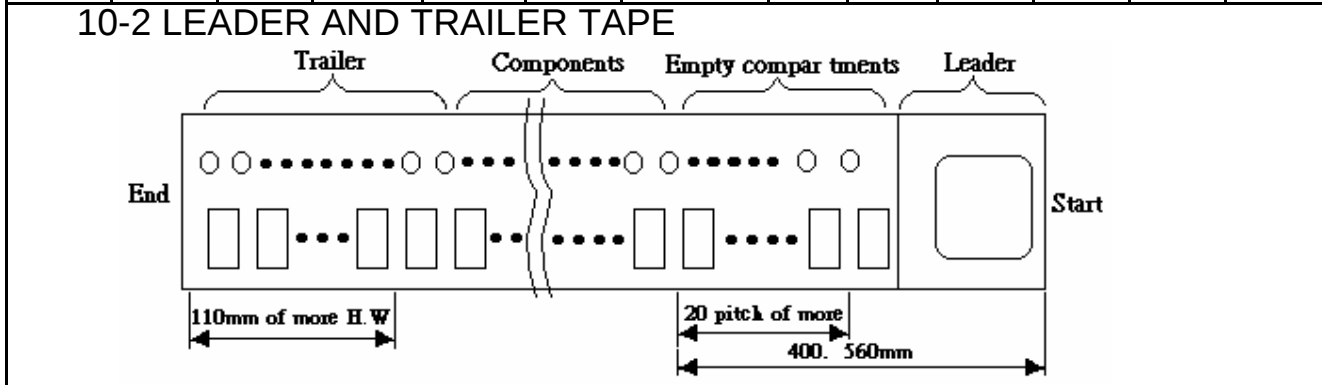

MAX ECHO

鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION


版次：第3版

MAX ECHO

|      |                           |                         |                    |     |
|------|---------------------------|-------------------------|--------------------|-----|
| NAME | MULTILAYER CHIP INDUCTORS | COMPOSITE SPECIFICATION |                    | 7/8 |
|      | EBLS-2012                 | SPEC#                   | EBLS2012-4R7K 0.1A |     |

10-5 PEELING STRENGTH OF COVER TAPE

|            |            |
|------------|------------|
| Cover tape | (10g~100g) |
|------------|------------|

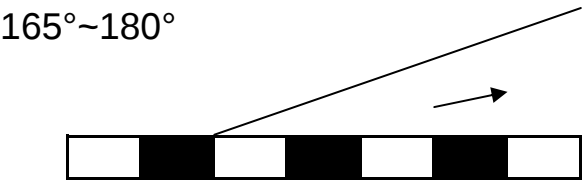

Test condition

- 1) peel angle : 165°~180° vs carrier tape
  - 2) peel speed : 300mm/min
- 11.PACKAGING
- 1) Tape & Reel packaging in composite specification 6/8
  - 2) Reel and a bag of desiccant shall be packed in Nylon or plastic bag
  - 3) Maximum of 5 bags shall be packaged in a inner box
  - 4) Maximum of 6 inner box shall be packaged in a outer box
- 12.Reel Label
- Producing the goods label needs to indicate (1 ) Pb Free (2) RoHS Compliant

MAX ECHO

鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3版

MAX ECHO

|      |                           |                         |                    |       |
|------|---------------------------|-------------------------|--------------------|-------|
| NAME | MULTILAYER CHIP INDUCTORS | COMPOSITE SPECIFICATION |                    | 8 / 8 |
|      | EBLS-2012                 | SPEC#                   | EBLS2012-4R7K 0.1A |       |

13. STORAGE

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| <div>13-1The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to high humidity. Packages must be stored at 40℃ or less and 70% RH or less.</div> <div>13-2 The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to dust or harmful gas (hydrogen chloride, sulfurous acid gas or hydrogen sulfide).</div> <div>13-3 Packaging material may be deformed if packages are stored where they are exposed to heat or direct sun—light.</div> <div>13-4 Minimum packages, such as polyvinyl heat—seal packages shall not be opened until just before they are used.<br/>If opened, use the reels as soon as possible.</div> <div>13-5 Solderability specified in composite specification 4/8 shall be for 6 months from the date of delivery on condition that they are stored at the environment specified clause 13-1 &amp; 13-2.<br/>For those parts which passed more than 6 months shall be checked solderability before it is used.</div> |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|