



## Surface Mount Glass Passivated Ultrafast Rectifier

**SUPERRECTIFIER®**



**DO-213AB (GL41)**

Patented\*

\*Glass-plastic encapsulation is covered by Patent No. 3,996,602, brazed-lead assembly to Patent No. 3,930,306

### FEATURES

- Cavity-free glass-passivated junction
- Ideal for automated placement
- Ultrafast reverse recovery time
- Low switching losses, high efficiency
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Meets MSL level 1, per J-STD-020, LF maximum peak of 250 °C
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



**RoHS COMPLIANT**

### TYPICAL APPLICATIONS

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer, automotive and telecommunication.

### MECHANICAL DATA

**Case:** DO-213AB, molded epoxy over glass body  
Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102  
E3 suffix for consumer grade, meets JESD 201 class 1A whisker test, HE3 suffix for high reliability grade (AEC Q101 qualified), meets JESD 201 class 2 whisker test

**Polarity:** Two bands indicate cathode end - 1st band denotes device type and 2nd band denotes repetitive peak reverse voltage rating

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	1.0 A
$V_{RRM}$	50 V to 400 V
$I_{FSM}$	30 A
$t_{rr}$	50 ns
$V_F$	1.0 V, 1.25 V
$T_J \text{ max.}$	175 °C

MAXIMUM RATINGS ( $T_A = 25\text{ °C}$ unless otherwise noted)								
PARAMETER	SYMBOL	BYM12-50	BYM12-100	BYM12-150	BYM12-200	BYM12-300	BYM12-400	UNIT
Fast efficient device: 1st band is Green		EGL41A	EGL41B	EGL41C	EGL41D	EGL41F	EGL41G	
Polarity color bands (2nd Band)		Gray	Red	Pink	Orange	Brown	Yellow	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	V
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	V
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	V
Maximum average forward rectified current at $T_T = 75\text{ °C}$	$I_{F(AV)}$	1.0						A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	30						A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to + 175						°C

# BYM12-50 thru BYM12-400, EGL41A thru EGL41G



Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)									
PARAMETER	TEST CONDITIONS	SYMBOL	BYM12-50	BYM12-100	BYM12-150	BYM12-200	BYM12-300	BYM12-400	UNIT
			EGL41A	EGL41B	EGL41C	EGL41D	EGL41F	EGL41G	
Max. instantaneous forward voltage <sup>(1)</sup>	1.0 A	V <sub>F</sub>	1.0				1.25		V
Max. DC reverse current at rated DC blocking voltage <sup>(1)</sup>	T <sub>A</sub> = 25 °C T <sub>A</sub> = 125 °C	I <sub>R</sub>	5.0				50		μA
Max. reverse recovery time	I <sub>F</sub> = 0.5 A, I <sub>R</sub> = 1.0 A, I <sub>rr</sub> = 0.25 A	t <sub>rr</sub>	50						ns
Typical junction capacitance	4.0 V, 1 MHz	C <sub>J</sub>	20				14		pF

**Note:**

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

THERMAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)									
PARAMETER	SYMBOL	BYM12-50	BYM12-100	BYM12-150	BYM12-200	BYM12-300	BYM12-400	UNIT	
		EGL41A	EGL41B	EGL41C	EGL41D	EGL41F	EGL41G		
Maximum thermal resistance <sup>(1)(2)</sup>	R <sub>θJA</sub> R <sub>θJT</sub>	60				30		°C/W	

**Notes:**

- (1) Thermal resistance from junction to ambient, 0.24 x 0.24" (6.0 x 6.0 mm) copper pads to each terminal
- (2) Thermal resistance from junction to terminal, 0.24 x 0.24" (6.0 x 6.0 mm) copper pads to each terminal

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
EGL41D-E3/96	0.114	96	1500	7" diameter plastic tape and reel
EGL41D-E3/97	0.114	97	5000	13" diameter plastic tape and reel
EGL41DHE3/96 <sup>(1)</sup>	0.114	96	1500	7" diameter plastic tape and reel
EGL41DHE3/97 <sup>(1)</sup>	0.114	97	5000	13" diameter plastic tape and reel

**Note:**

(1) Automotive grade AEC Q101 qualified

## RATINGS AND CHARACTERISTICS CURVES

(T<sub>A</sub> = 25 °C unless otherwise noted)

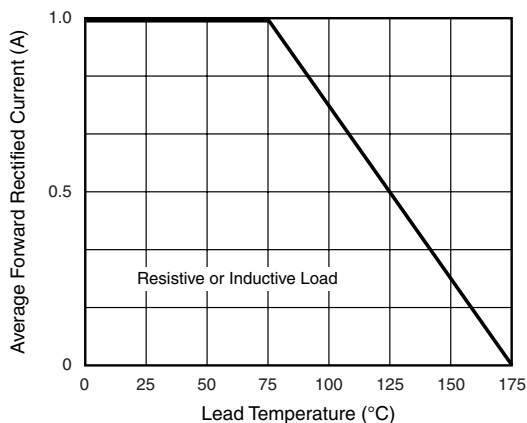


Figure 1. Maximum Forward Current Derating Curve

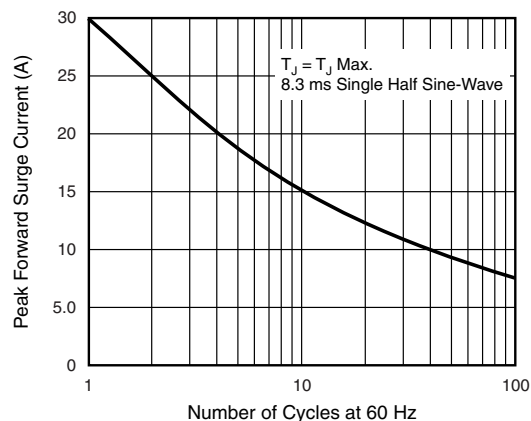


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

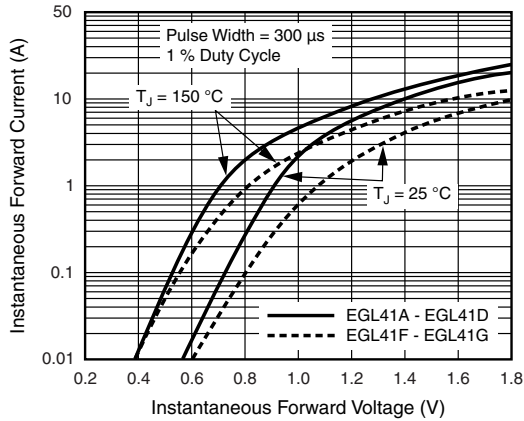


Figure 3. Typical Instantaneous Forward Characteristics

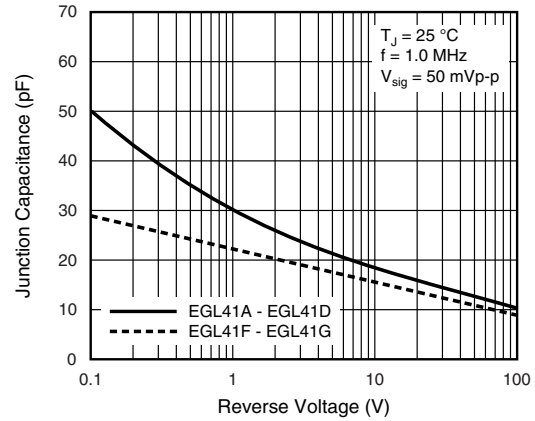


Figure 5. Typical Junction Capacitance

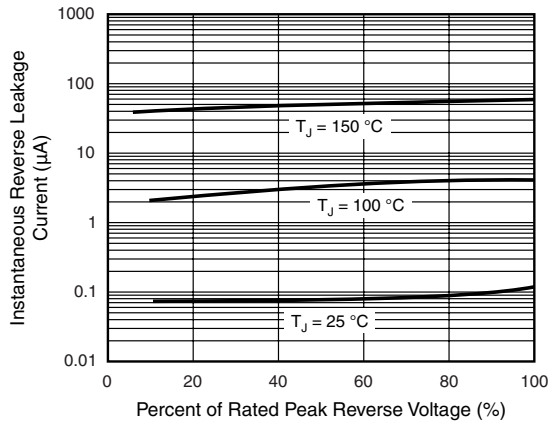


Figure 4. Typical Reverse Leakage Characteristics


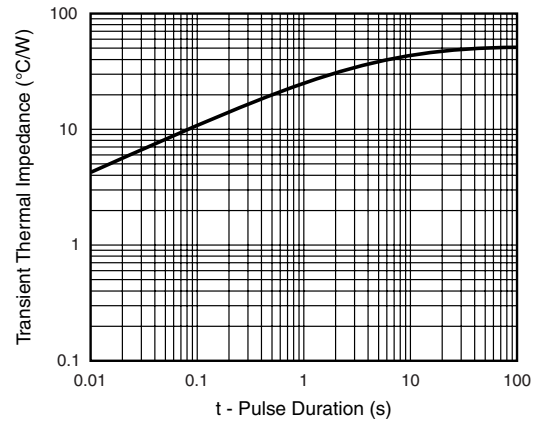


Figure 6. Typical Transient Thermal Impedance


## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

### DO-213AB (GL41)

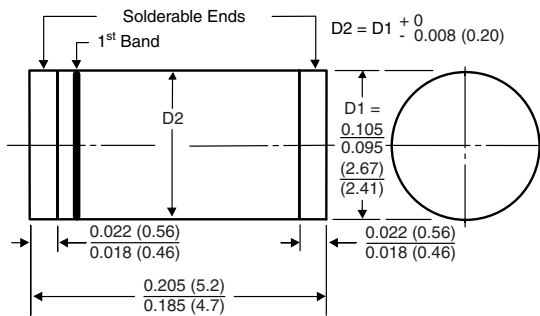

1<sup>st</sup> Band Denotes Type and Positive End (Cathode)

### Mounting Pad Layout

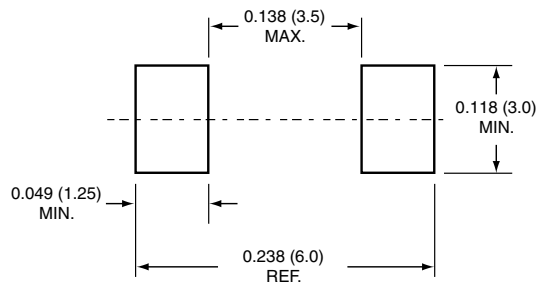



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.