


175 series

**MINI USB-A FEMALE 5PIN
SMT & DIP**

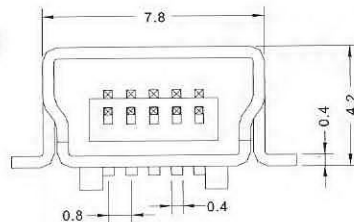

Specifications:

Contact Resistance: 10m Ω max.

Insulator Resistance: 500M Ω min.at DC 500V

Current Rating: 24V DC 1AMP max

Dielectric Withstanding:

Voltage: AC 500V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

