



NEW!

Coupled Inductors – MSD1278 Series







The MSD1278 series of coupled inductors provides high inductance, high efficiency and excellent current handling in a rugged, low cost part.


These inductors can be used as a coupled inductor, two single inductors connected in series or parallel, or as a 1:1 transformer. They offer magnetic shielding and 500 V winding-to-winding and winding-to-core isolation.

The MSD1278 inductors are ideal for use in SEPIC applications. In SEPIC topologies, the required inductance is halved for each winding, allowing selection of a part with lower DCR and higher current handling than comparable separate inductors. They are also well suited for use as VRM inductors in high-current DC-DC converters and VRM/VRD controllers.


Coilcraft **Designer's Kit C400** contains samples of all values shown. To order, contact Coilcraft or purchase on-line at <http://order.coilcraft.com>.

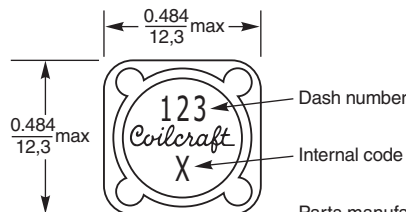


Parts manufactured prior to Sept. 2007 were marked with only the dash number.




Dimensions are in $\frac{\text{inches}}{\text{mm}}$



Coupled inductor, transformer and SEPIC modes



Autotransformer and series modes



Parallel mode

Recommended Land Patterns

Weight: 3.7 – 4.4 g
Tape and reel: 500/13" reel 24 mm tape width
 For packaging data see Tape and Reel Specifications section.



Specifications subject to change without notice.
 Please check our website for latest information.

Document 499-1 Revised 11/06/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469
 E-mail info@coilcraft.com Web <http://www.coilcraft.com>


NEW!

Coupled Inductors - MSD1278 Series

Part number ¹	Leads connected in parallel					Leads connected in series				
	Inductance ^{2,3} (μ H)	DCR max ⁴ (Ohms)	SRF typ ⁵ (MHz)	Isat ⁶ (A)	I _{rms} ⁷ (A)	Inductance ³ (μ H)	DCR max ⁸ (Ohms)	SRF typ ⁵ (MHz)	Isat ⁶ (A)	I _{rms} ⁷ (A)
MSD1278-472ML_	4.7 \pm 20%	0.019	32.0	14.9	7.4	18.8 \pm 25%	0.076	12.0	7.7	3.6
MSD1278-562ML_	5.6 \pm 20%	0.023	25.0	13.4	7.2	22.4 \pm 25%	0.092	10.4	6.6	3.5
MSD1278-682ML_	6.8 \pm 20%	0.024	24.0	13.1	6.9	27.2 \pm 25%	0.096	9.5	6.4	3.4
MSD1278-822ML_	8.2 \pm 20%	0.025	18.0	10.8	6.6	32.8 \pm 25%	0.100	7.2	5.6	3.3
MSD1278-103ML_	10 \pm 20%	0.029	16.5	10.5	6.2	40 \pm 25%	0.116	6.6	5.4	3.2
MSD1278-123ML_	12 \pm 20%	0.031	14.5	9.6	6.0	48 \pm 25%	0.124	5.4	4.8	2.9
MSD1278-153ML_	15 \pm 20%	0.036	11.8	9.1	5.8	60 \pm 25%	0.144	5.0	4.3	2.7
MSD1278-183ML_	18 \pm 20%	0.040	10.5	8.0	5.5	72 \pm 25%	0.158	3.8	3.9	2.5
MSD1278-223ML_	22 \pm 20%	0.048	9.0	6.8	5.2	88 \pm 25%	0.190	3.4	3.5	2.2
MSD1278-273ML_	27 \pm 20%	0.060	8.4	6.5	4.7	108 \pm 25%	0.240	3.2	3.4	2.0
MSD1278-333ML_	33 \pm 20%	0.075	7.6	5.6	4.2	132 \pm 25%	0.300	3.0	3.1	1.7
MSD1278-393ML_	39 \pm 20%	0.080	6.5	5.5	3.6	156 \pm 25%	0.320	2.6	2.8	1.6
MSD1278-473ML_	47 \pm 20%	0.090	6.0	5.2	3.0	188 \pm 25%	0.360	2.1	2.6	1.5
MSD1278-563ML_	56 \pm 20%	0.095	5.6	4.5	2.8	224 \pm 25%	0.380	2.0	2.4	1.4
MSD1278-683ML_	68 \pm 20%	0.105	5.0	4.1	2.6	272 \pm 25%	0.420	1.6	2.1	1.3
MSD1278-823ML_	82 \pm 20%	0.140	4.1	3.8	2.3	328 \pm 25%	0.560	1.3	1.9	1.2
MSD1278-104ML_	100 \pm 20%	0.150	3.6	3.4	2.0	400 \pm 25%	0.600	1.1	1.7	1.1
MSD1278-124KL_	120 \pm 10%	0.205	3.2	3.2	1.9	480 \pm 25%	0.820	1.0	1.6	1.0
MSD1278-154KL_	150 \pm 10%	0.230	3.0	2.8	1.8	600 \pm 25%	0.920	0.82	1.4	0.89
MSD1278-184KL_	180 \pm 10%	0.255	2.7	2.5	1.7	720 \pm 25%	1.02	0.70	1.3	0.84
MSD1278-224KL_	220 \pm 10%	0.345	2.5	2.3	1.6	880 \pm 25%	1.38	0.64	1.1	0.75
MSD1278-274KL_	270 \pm 10%	0.450	2.1	2.1	1.5	1080 \pm 25%	1.80	0.55	1.0	0.71
MSD1278-334KL_	330 \pm 10%	0.510	2.0	1.9	1.3	1320 \pm 25%	2.04	0.47	0.92	0.62
MSD1278-394KL_	390 \pm 10%	0.560	1.8	1.7	1.1	1560 \pm 25%	2.24	0.41	0.84	0.53
MSD1278-474KL_	470 \pm 10%	0.765	1.6	1.6	0.87	1880 \pm 25%	3.06	0.36	0.80	0.43
MSD1278-564KL_	560 \pm 10%	0.845	1.5	1.5	0.83	2240 \pm 25%	3.38	0.31	0.73	0.40
MSD1278-684KL_	680 \pm 10%	1.145	1.4	1.3	0.76	2720 \pm 25%	4.58	0.30	0.63	0.36
MSD1278-824KL_	820 \pm 10%	1.275	1.3	1.2	0.69	3280 \pm 25%	5.10	0.24	0.58	0.33
MSD1278-105KL_	1000 \pm 10%	1.415	1.1	1.1	0.60	4000 \pm 25%	5.66	0.20	0.56	0.30

1. When ordering, please specify **termination** and **packaging** code:

MSD1278-105KL D

Termination: L = RoHS compliant matte tin over nickel over phos bronze
Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: D = 13" machine-ready reel. EIA-481 embossed plastic tape (500 parts per full reel).

B = Less than full reel. In tape, but not machine ready.

To have a leader and trailer added (\$25 charge), use code letter D instead.

- Inductance shown for coupled inductor and for two inductors connected in parallel.
- Inductance is measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LC meter or equivalent.
- DCR is for both windings connected in parallel. DCR for each winding is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent.
- DC current at which the inductance drops 30% (typ) from its value without current.
- Current that causes a 40°C temperature rise from 25°C ambient.
- DCR is for both windings.
- Ambient temperature range:** -40°C to +85°C with I_{rms} current
+85°C to +125°C with derated current
- Storage temperature range:** Component: -55°C to +125°C
Packaging: -55°C to +80°C
- Resistance to soldering heat:** Three reflows at >217°C for 90 seconds (+260°C \pm 5°C for 20 – 40 seconds), allowing parts to cool to room temperature between.
- Electrical specifications at 25°C.

See Qualification Standards section for environmental and test data.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Specifications subject to change without notice.
Please check our website for latest information.

Document 499-2 Revised 11/06/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>




NEW!


Coupled Inductors - MSD1278 Series

Typical L vs Frequency

Leads connected in parallel

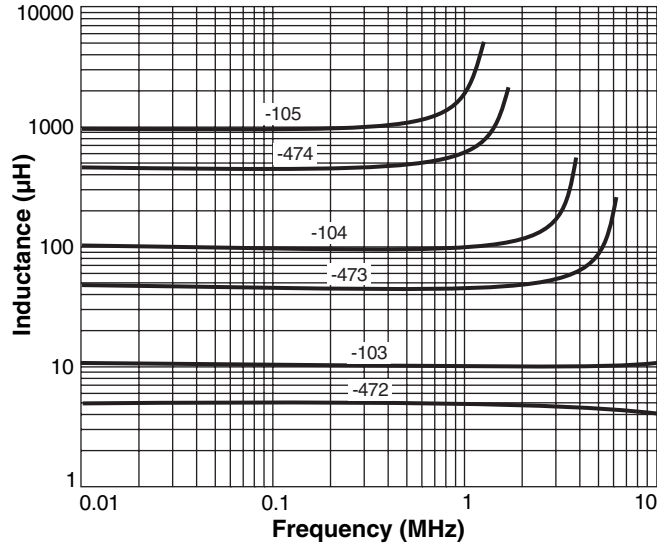


Leads connected in series

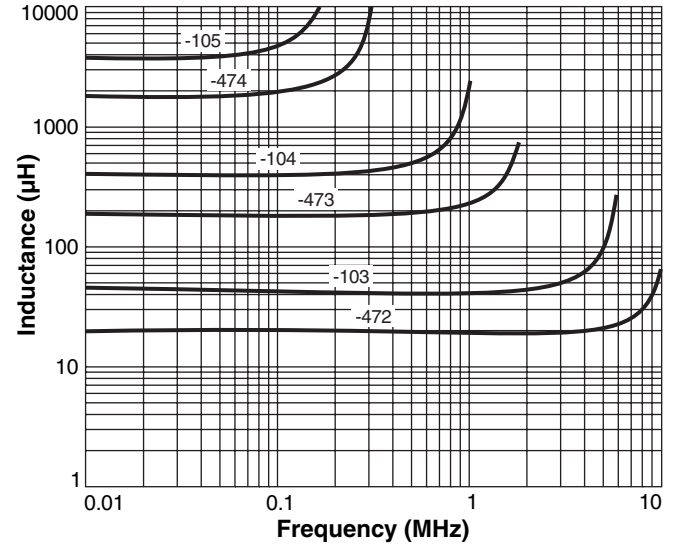


Typical L vs Current

Leads connected in parallel

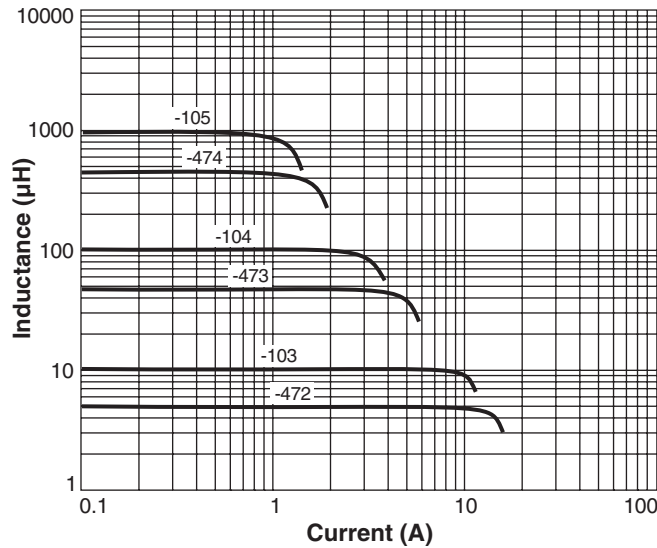

Leads connected in series

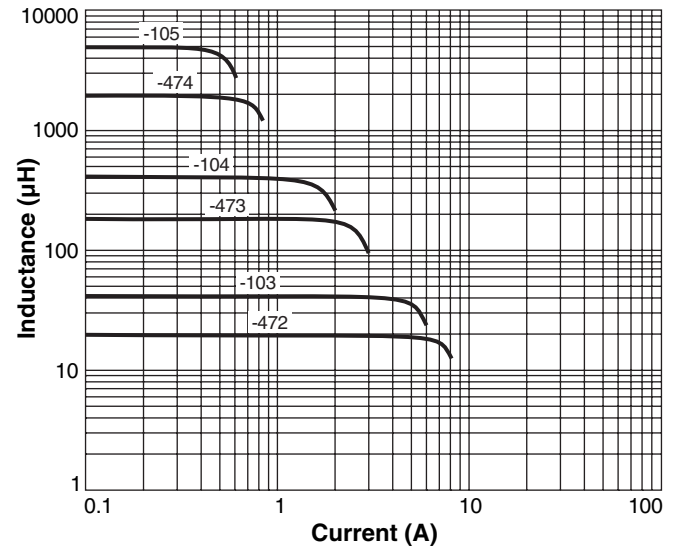

Specifications subject to change without notice.
Please check our website for latest information.

Document 499-3 Revised 11/06/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>




NEW!


Coupled Inductors - MSD1278 Series

Typical Isat Derating

Leads connected in parallel

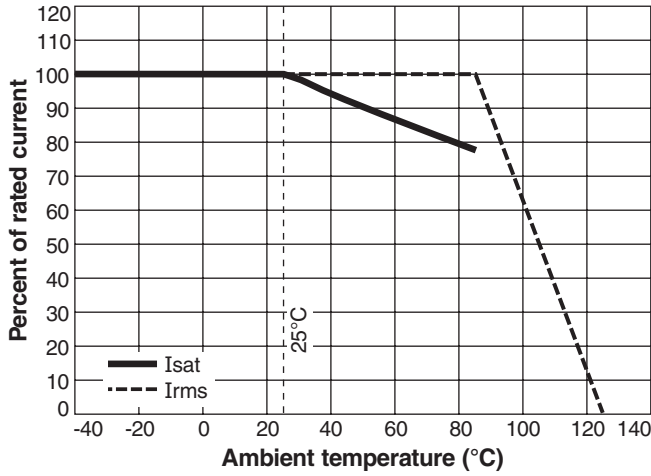

Leads connected in series

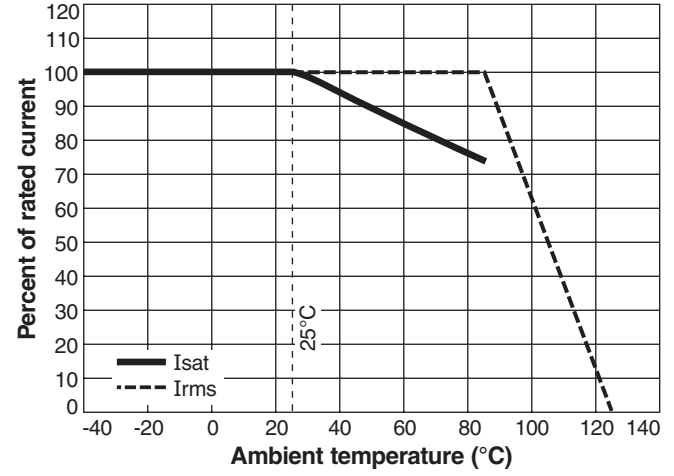

Specifications subject to change without notice.
Please check our website for latest information.

Document 499-4 Revised 11/06/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>