

Inductors

For General Applications

SMD

NL Series NL3225 Type

(We currently recommend that you switch to the NLV32 type.)

FEATURES

- The NL series are available in ranging from 2016 to 5650 types.
- Utilizing a miniaturized winding structure, these products provide high Q characteristics.
- Inductance tolerance is $\pm 5\%$ and $\pm 10\%$.

APPLICATIONS


Personal computers, hard disk drives, and other electronic equipment.

SPECIFICATIONS


| | |
|-----------------------------|---------------------------------|
| Operating temperature range | -40 to +85°C |
| Storage temperature range | -40 to +85°C [Unit of products] |

RECOMMENDED SOLDERING CONDITIONS

REFLOW SOLDERING

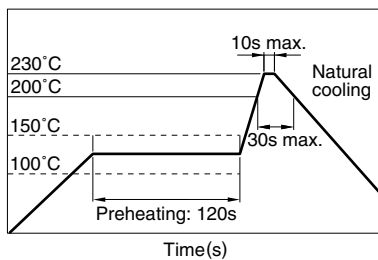


FLOW SOLDERING

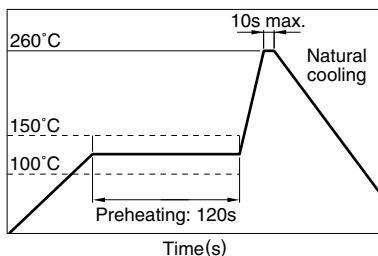

IRON SOLDERING

Perform soldering at 250°C on 30W max. within 5 seconds.

VAPOR-PHASING

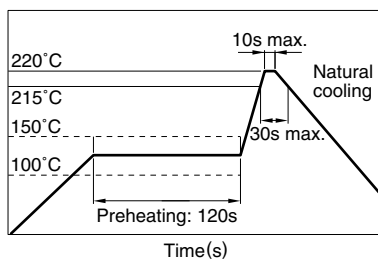

FLUX AND CLEANING

Rosin-based flux is recommended.

Cleaning Conditions

| | |
|---------|-------------------------------------------------------------------------------------------------------------------------|
| Solvent | Please select the solvent of this product avoiding a strong acid and a strong alkali, and considering the environments. |
| Time | 2min max. |

PRODUCT IDENTIFICATION

| | | | | |
|-----|--------|-----|-----|-----|
| NL | 322522 | T- | 2R2 | J |
| (1) | (2) | (3) | (4) | (5) |

(1)Series name

(2)Dimensions L×W×T

| | |
|--------|---------------|
| 322522 | 3.2×2.5×2.2mm |
|--------|---------------|

(3)Packaging style

| | |
|---|---------------|
| T | Taping (reel) |
|---|---------------|

(4)Inductance value

| | |
|-----|------|
| 1R0 | 1μH |
| 330 | 33μH |

(5)Inductance tolerance

| | |
|---|------------|
| J | $\pm 5\%$ |
| K | $\pm 10\%$ |

PACKAGING STYLE AND QUANTITIES

| | |
|-----------------|------------------|
| Packaging style | Quantity |
| Taping | 2000 pieces/reel |

Inductors


For General Applications

SMD

NL Series NL3225 Type

(We currently recommend that you switch to the NLV32 type.)

SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

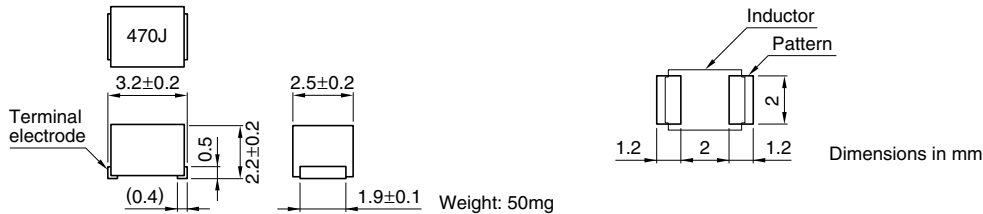

ELECTRICAL CHARACTERISTICS

| Inductance (μH) | Inductance tolerance | Q min. | Test frequency L, Q (MHz) | Self-resonant frequency (MHz)min. | DC resistance (Ω)max. | Rated current (mA)max. | Part No. |
|-----------------|----------------------|--------|---------------------------|-----------------------------------|-----------------------|------------------------|-----------------|
| 0.01 | ±10, ±5% | 15 | 100 | 2500 | 0.13 | 450 | NL322522T-010X* |
| 0.012 | ±10, ±5% | 17 | 100 | 2300 | 0.14 | 450 | NL322522T-012X |
| 0.015 | ±10, ±5% | 19 | 100 | 2100 | 0.16 | 450 | NL322522T-015X |
| 0.018 | ±10, ±5% | 21 | 100 | 1900 | 0.18 | 450 | NL322522T-018X |
| 0.022 | ±10, ±5% | 23 | 100 | 1700 | 0.2 | 450 | NL322522T-022X |
| 0.027 | ±10, ±5% | 23 | 100 | 1500 | 0.22 | 450 | NL322522T-027X |
| 0.033 | ±10, ±5% | 25 | 100 | 1400 | 0.24 | 450 | NL322522T-033X |
| 0.039 | ±10, ±5% | 25 | 100 | 1300 | 0.27 | 450 | NL322522T-039X |
| 0.047 | ±10, ±5% | 26 | 100 | 1200 | 0.3 | 450 | NL322522T-047X |
| 0.056 | ±10, ±5% | 26 | 100 | 1100 | 0.33 | 450 | NL322522T-056X |
| 0.068 | ±10, ±5% | 27 | 100 | 1000 | 0.36 | 450 | NL322522T-068X |
| 0.082 | ±10, ±5% | 27 | 100 | 900 | 0.4 | 450 | NL322522T-082X |
| 0.1 | ±10, ±5% | 28 | 100 | 700 | 0.44 | 450 | NL322522T-R10X |
| 0.12 | ±10, ±5% | 30 | 25.2 | 500 | 0.22 | 450 | NL322522T-R12X |
| 0.15 | ±10, ±5% | 30 | 25.2 | 450 | 0.25 | 450 | NL322522T-R15X |
| 0.18 | ±10, ±5% | 30 | 25.2 | 400 | 0.28 | 450 | NL322522T-R18X |
| 0.22 | ±10, ±5% | 30 | 25.2 | 350 | 0.32 | 450 | NL322522T-R22X |
| 0.27 | ±10, ±5% | 30 | 25.2 | 320 | 0.36 | 450 | NL322522T-R27X |
| 0.33 | ±10, ±5% | 30 | 25.2 | 300 | 0.4 | 450 | NL322522T-R33X |
| 0.39 | ±10, ±5% | 30 | 25.2 | 250 | 0.45 | 450 | NL322522T-R39X |
| 0.47 | ±10, ±5% | 30 | 25.2 | 220 | 0.5 | 450 | NL322522T-R47X |
| 0.56 | ±10, ±5% | 30 | 25.2 | 180 | 0.55 | 450 | NL322522T-R56X |
| 0.68 | ±10, ±5% | 30 | 25.2 | 160 | 0.6 | 450 | NL322522T-R68X |
| 0.82 | ±10, ±5% | 30 | 25.2 | 140 | 0.65 | 450 | NL322522T-R82X |
| 1 | ±5% | 30 | 7.96 | 120 | 0.7 | 400 | NL322522T-1R0J |
| 1.2 | ±5% | 30 | 7.96 | 100 | 0.75 | 390 | NL322522T-1R2J |
| 1.5 | ±5% | 30 | 7.96 | 85 | 0.85 | 370 | NL322522T-1R5J |
| 1.8 | ±5% | 30 | 7.96 | 80 | 0.9 | 350 | NL322522T-1R8J |
| 2.2 | ±5% | 30 | 7.96 | 75 | 1 | 320 | NL322522T-2R2J |
| 2.7 | ±5% | 30 | 7.96 | 70 | 1.1 | 290 | NL322522T-2R7J |
| 3.3 | ±5% | 30 | 7.96 | 60 | 1.2 | 260 | NL322522T-3R3J |
| 3.9 | ±5% | 30 | 7.96 | 55 | 1.3 | 250 | NL322522T-3R9J |
| 4.7 | ±5% | 30 | 7.96 | 50 | 1.5 | 220 | NL322522T-4R7J |
| 5.6 | ±5% | 30 | 7.96 | 45 | 1.6 | 200 | NL322522T-5R6J |
| 6.8 | ±5% | 30 | 7.96 | 40 | 1.8 | 180 | NL322522T-6R8J |
| 8.2 | ±5% | 30 | 7.96 | 35 | 2 | 170 | NL322522T-8R2J |
| 10 | ±5% | 30 | 2.52 | 30 | 2.1 | 150 | NL322522T-100J |
| 12 | ±5% | 30 | 2.52 | 20 | 2.5 | 140 | NL322522T-120J |

* X: Please specify the inductance tolerance, K(±10%) or J(±5%)

• Inductance tolerance is only standard.

• Test equipment L, Q: YHP4191A IMPEDANCE ANALYZER (16092A) [$L \leq 0.1\mu\text{H}$]
 YHP4194A IMPEDANCE ANALYZER (16085A+16093B+TDK TF-1) [$L \geq 0.12\mu\text{H}$]
 SRF:HP8753C NETWORK ANALYZER
 Rdc:MATSUSHITA VP-2941A DIGITAL MILLIOHM METER

Inductors

For General Applications

SMD

NL Series NL3225 Type

(We currently recommend that you switch to the NLV32 type.)



ELECTRICAL CHARACTERISTICS

| Inductance (μH) | Inductance tolerance | Q min. | Test frequency L, Q (MHz) | Self-resonant frequency (MHz)min. | DC resistance (Ω)max. | Rated current (mA)max. | Part No. |
|-----------------|----------------------|--------|---------------------------|-----------------------------------|-----------------------|------------------------|----------------|
| 15 | ±5% | 30 | 2.52 | 20 | 2.8 | 130 | NL322522T-150J |
| 18 | ±5% | 30 | 2.52 | 20 | 3.3 | 120 | NL322522T-180J |
| 22 | ±5% | 30 | 2.52 | 20 | 3.7 | 110 | NL322522T-220J |
| 27 | ±5% | 30 | 2.52 | 20 | 5 | 80 | NL322522T-270J |
| 33 | ±5% | 30 | 2.52 | 17 | 5.6 | 70 | NL322522T-330J |
| 39 | ±5% | 30 | 2.52 | 16 | 6.4 | 65 | NL322522T-390J |
| 47 | ±5% | 30 | 2.52 | 15 | 7 | 60 | NL322522T-470J |
| 56 | ±5% | 30 | 2.52 | 13 | 8 | 55 | NL322522T-560J |
| 68 | ±5% | 30 | 2.52 | 12 | 9 | 50 | NL322522T-680J |
| 82 | ±5% | 30 | 2.52 | 11 | 10 | 45 | NL322522T-820J |
| 100 | ±5% | 20 | 0.796 | 10 | 10 | 40 | NL322522T-101J |
| 120 | ±5% | 20 | 0.796 | 10 | 11 | 70 | NL322522T-121J |
| 150 | ±5% | 20 | 0.796 | 8 | 15 | 65 | NL322522T-151J |
| 180 | ±5% | 20 | 0.796 | 7 | 17 | 60 | NL322522T-181J |
| 220 | ±5% | 20 | 0.796 | 7 | 21 | 50 | NL322522T-221J |
| 270 | ±5% | 20 | 0.796 | 6 | 28 | 45 | NL322522T-271J |
| 330 | ±5% | 20 | 0.796 | 5 | 34 | 40 | NL322522T-331J |
| 390 | ±5% | 20 | 0.796 | 5 | 42 | 35 | NL322522T-391J |
| 470 | ±5% | 20 | 0.796 | 4 | 40 | 25 | NL322522T-471J |

- Inductance tolerance is only standard.
- Test equipment L, Q: YHP4194A IMPEDANCE ANALYZER (16085A+16093B+TDK TF-1) [$L \geq 0.12\mu\text{H}$]
SRF: HP8753C NETWORK ANALYZER
Rdc: MATSUSHITA VP-2941A DIGITAL MILLIOHM METER


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. FREQUENCY CHARACTERISTICS

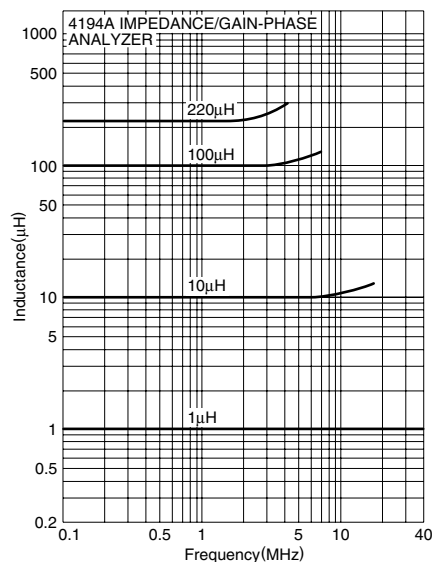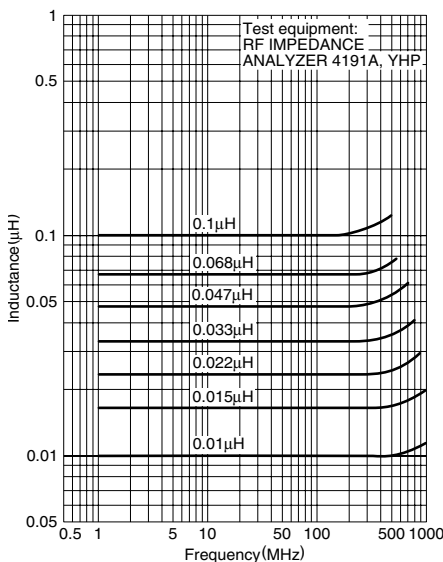

INDUCTANCE CHANGE vs. DC

SUPERPOSITION CHARACTERISTICS

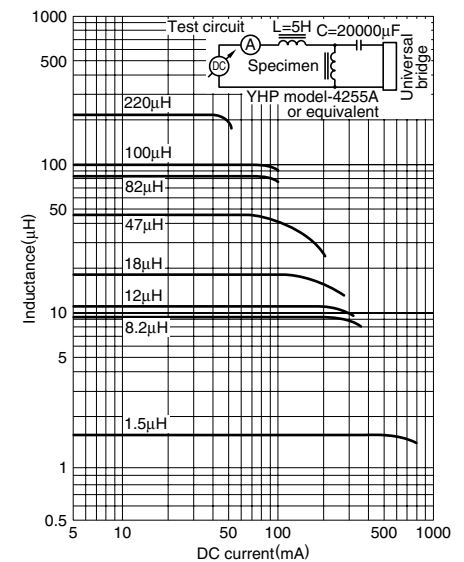


Inductors

For General Applications
SMD


NL Series NL3225 Type

(We currently recommend that you switch to the NLV32 type.)

TYPICAL ELECTRICAL CHARACTERISTICS IMPEDANCE vs. FREQUENCY CHARACTERISTICS

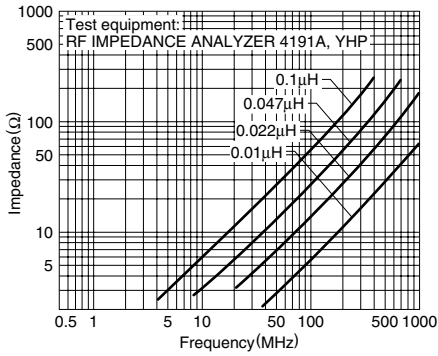

INDUCTANCE CHANGE vs. TEMPERATURE CHARACTERISTICS

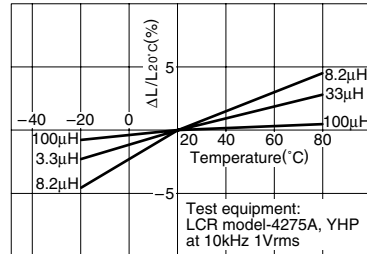

Q vs. FREQUENCY CHARACTERISTICS

