


## SMD TYPE CERAMIC (SMD 6 x 3.5)



### Application of SMD crystal:

- Radio communication
- TCXO
- Office automation equipment
- GPS
- Audio-visual equipment

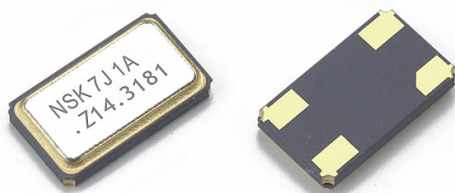

### {Features}

Seam welding

Excellent solderability

Automatic and perfect packing due to emboss taping

Excellent vibration resistance & shock resistance

RoHS compliant / Pb free




### Electrical Specification:

Model	NXC-63
<b>1.Frequency</b>	
Frequency Range	10.0 ~ 125.000 MHz
Frequency Tolerance at 25 °C ± °C	±0 ~ ±100 ppm (TYP.)
Frequency Stability Over Operating Temp Range	±0 ~ ±100 ppm (TYP.)
<b>2.Environmental Condition</b>	
Operating Temp Range	-10 °C ~ +60 °C, -20 °C ~ +70 °C or customer requirement
Storage Temp Range	-40 °C ~ +85 °C
Aging Rate	±3ppm/year
<b>3.Electrical Specifications</b>	
Test Circuit	S&A 250B
Load Capacitance	6 pF ~ 32 pF, series or special
Drive Level	1uW ~ 100uW or special
Shunt Capacitance	7.0pF max


### Equivalent Series Resistance(ESR) VS Frequency:

Frequency (MHz)	Oscillation Mode	NXC-63
10 ~ 12.0	Fundamental	80
12.1 ~ 25.0	Fundamental	60
25.1 ~ 52.0	Fundamental	40
45.1 ~ 125.0	3rd overtone	80

## Dimensions (mm):

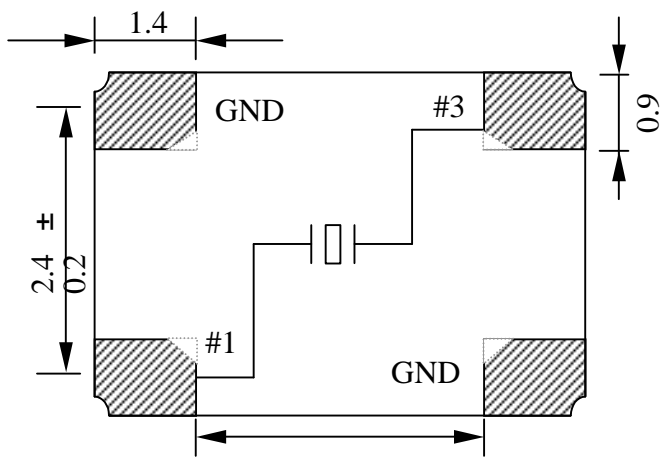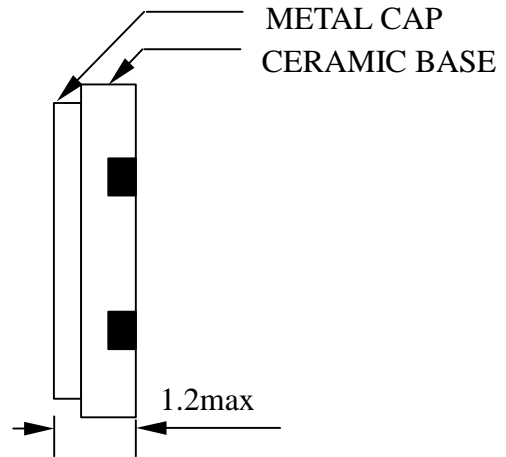
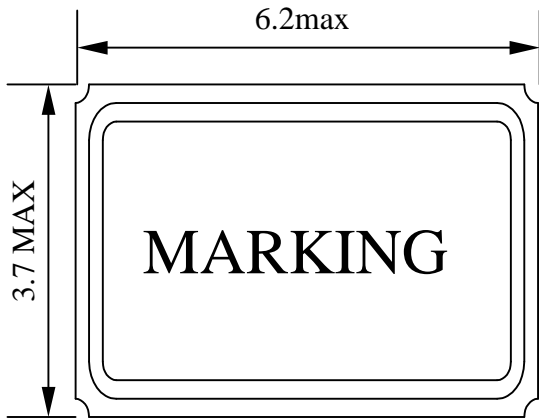


< TOP VIEW >

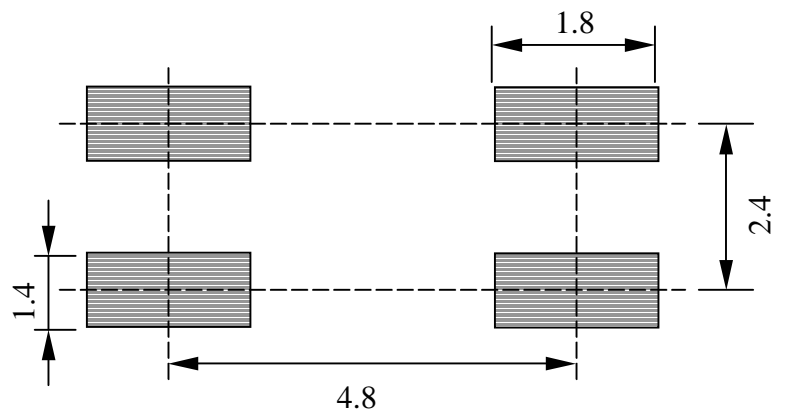


( Recommended Land Pattern )


## Tape specification: (mm)

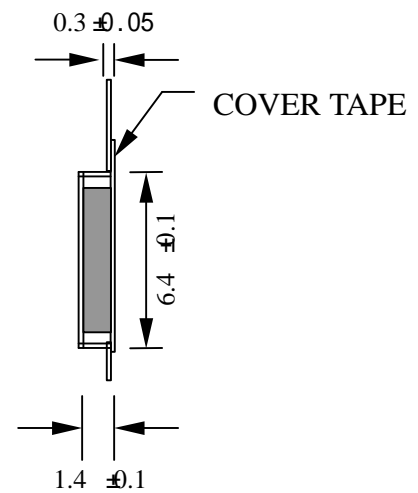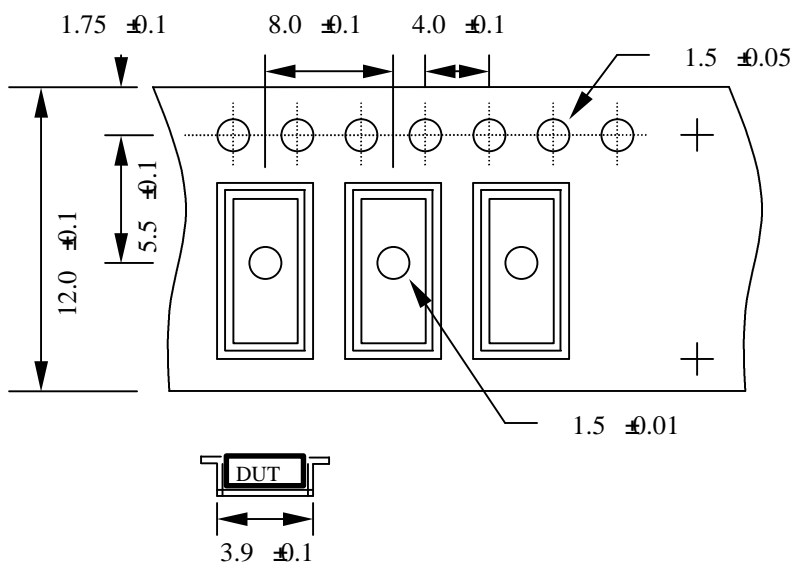

**Reel packing (mm):**

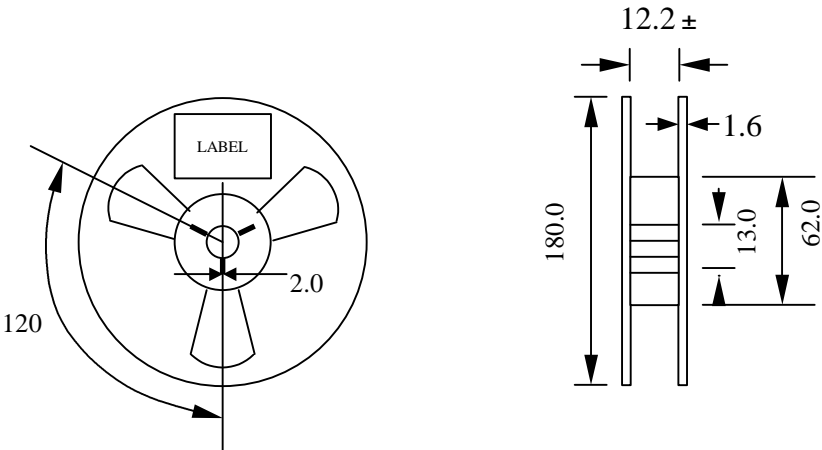

**Reflow Temperature profile:**

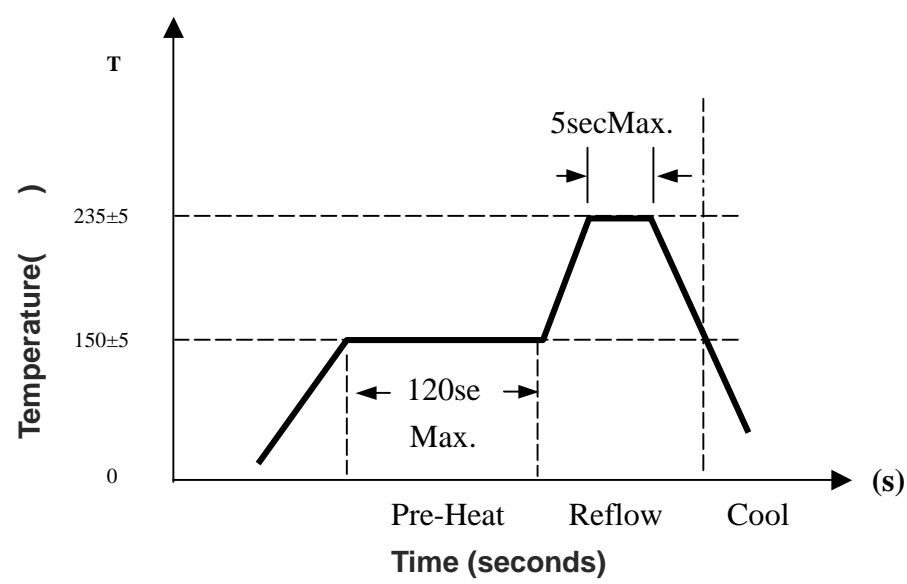

\* Above specification subject to change without prior notice, please consult our sales representative for more information @ [www.nsk.com.tw](http://www.nsk.com.tw)