

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.1版

MAX ECHO

NAME	MULTILAYER POWER INDUCTORS	COMPOSITE SPECIFICATION		1 / 8
	PCLS-201209	SPEC#	PCLS2012-SERIES	

1. SCOPE

This specification applies to the PCLS-2012 series Multilayer Power Inductors

2. STANDARD ATMOSPHERIC CONDITIONS

Unless otherwise specified the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature : 20±15°C

Relative humidity : 30~70%

If there may be any doubt on the results, measurements shall be made within the following limits :

Ambient temperature : 25±5°C

Relative humidity : 30~70%

3. RATINGS

PART NO	INDUCTANCE	SELF-RESONANT FREQUENCY(MHz)	DC RESISTANCE	RATED CURRENT
	AT 1 MHz 250mV	Min	(Ω)	(mA) Max
PCLS2012-R47M	0.47 μH±20%	100	0.10±25%	1100
PCLS2012-R68M	0.68μH±20%	100	0.12±25%	1000
PCLS2012-R82M	0.82μH±20%	90	0.14±25%	900
PCLS2012-1R0M	1.0μH±20%	90	0.16±25%	800
PCLS2012-1R0N 1.3A	1.0μH±30%	90	0.048~0.081	1300
PCLS2012-1R0MRDC11	1.0μH±20%	90	0.11±20%	1200
PCLS2012-1R2M	1.2μH±20%	80	0.16±25%	800
PCLS2012-1R5M	1.5 μH±20%	70	0.22±25%	700
PCLS2012-1R8M	1.8μH±20%	60	0.22±25%	700
PCLS2012-2R2M	2.2μH±20%	50	0.25±25%	600
PCLS2012-2R2M0.8A	2.2μH±20%	50	0.25±25%	800
PCLS2012-2R2M1A	2.2μH±20%	50	0.17±20%	1000
PCLS2012-3R3M	3.3μH±20%	40	0.22±25%	500
PCLS2012-4R7M	4.7μH±20%	30	0.30±25%	500
PCLS2012-4R7MRDC26	4.7μH±20%	30	0.26±20%	800

※The maximum rated current : the DC current value having temperature increased 40 °C after thru DC current 2 hours at ambient temperature.


Regarding to the inductance variability of rated current, please refer to page 2:

Inductance Vs. DC superposition characteristics.

4. DIMENSION

OPERATING TEMP. RANGE : -55°C ~ +125°C

STORAGE TEMP. RANGE : -40°C ~ +85°C

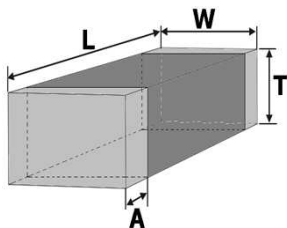

TYPE	L	W	T	A(m/m)
PCLS-2012	2.0±0.2 (.079±.008)	1.25±0.2 (.049±.008)	0.9±0.1 (.035±.004)	0.5±0.2 (.020±.008)

PLANNED BY	CHECKED BY	APPROVED BY	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> 鈺鎧文件中心 發行章 </div>
LUN	TINA	Chi Chi Huang	

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION


版次：第3.1版

MAX ECHO


NAME	MULTILAYER CHIP INDUCTORS	COMPOSITE SPECIFICATION		2 / 8
	PCLS-201209	SPEC#	PCLS2012-SERIES	

5. CURVE

Inductance vs. DC Bias Current

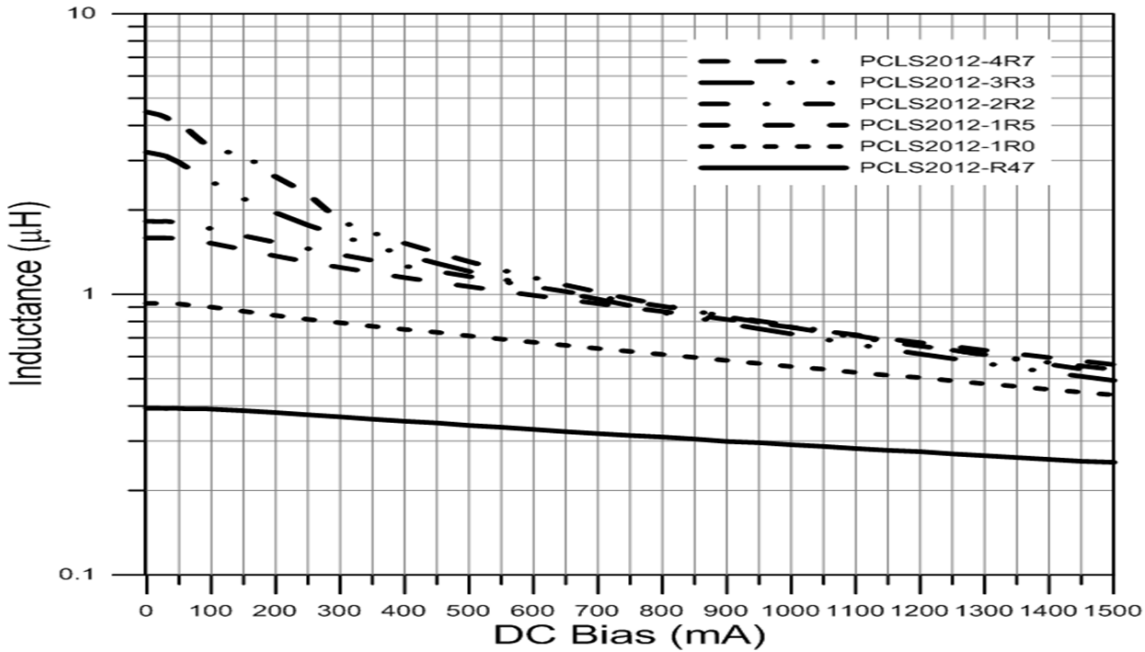

Inductance vs. Frequency

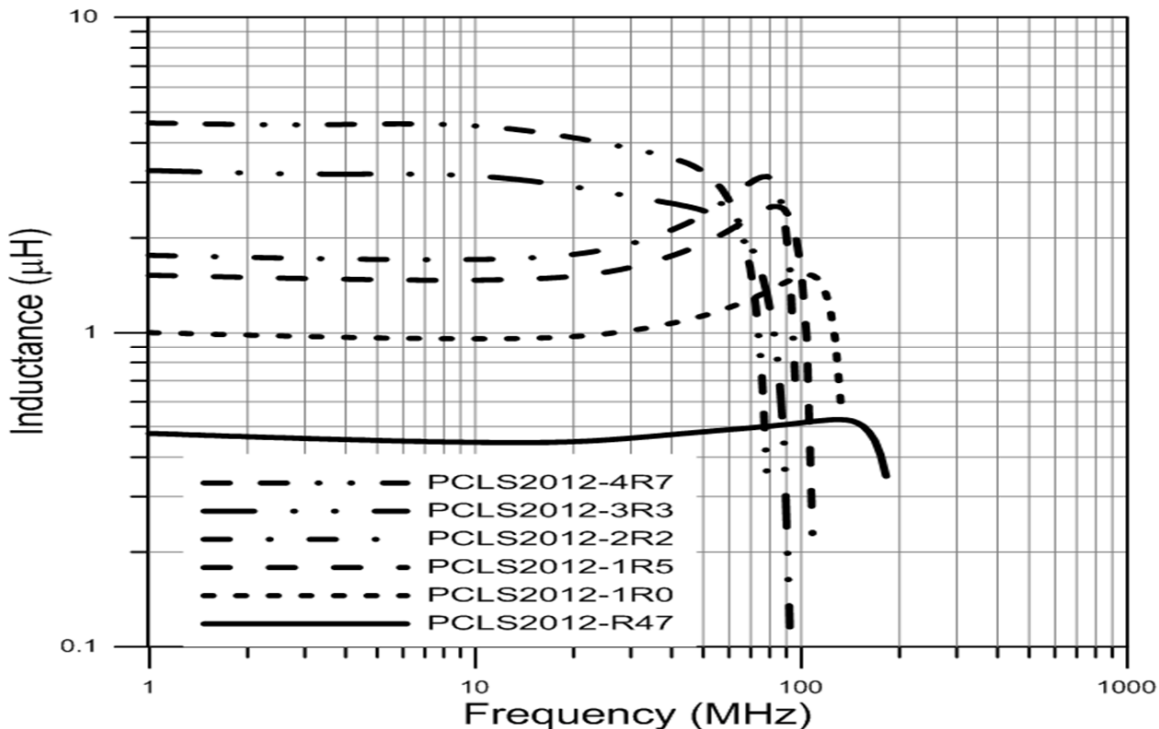

MAX ECHO 鈺鎧科技股份有限公司規格標準書 COMPONENT SPECIFICATION


版次：第3.1版

MAX ECHO


Name	Multilayer Chip Inductors	COMPOSITE SPECIFICATION		3 / 8
	PCLS-201209	SPEC#	PCLS2012-SERIES	

6) Reflow soldering conditions

- Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max. Unenough pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.
- Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode, When soldering is repeated, allowable time is the accumulated time.

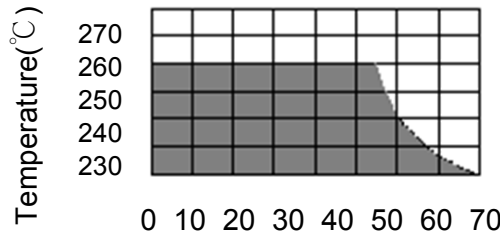

Temperature Profile

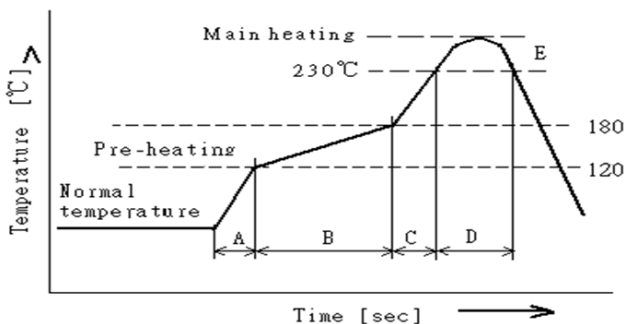

A	Slope of temp. rise	※ 1 to 5	※ °C/sec
B	Heat time	50 to 150	※ sec
	Heat temperature	120 to 180	※ °C
C	Slope of temp. rise	1 to 5	※ °C/sec
D	Time over 230°C	90~120	※ sec
E	Peak temperature	255~260	※ °C
	Peak hold time	10 max.	※ sec
No. of mounting		3	※ times

(Melting area of solder)

6-1 Reworking with soldering iron


Preheating	150°C, 1minute
Tip temperature	280°C max
Soldering time	3seconds max.
Soldering iron output	30w max.
End of soldering iron	∅ 3mm max.

- Reworking should be limited to only one time.

Note : Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the ferrite material due to the thermal shock.

6-2 Solder Volume

Solder shall be used not to be exceed the upper limits as shown below.

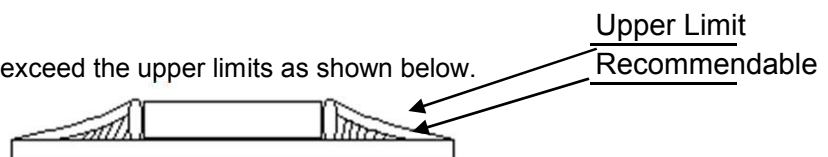

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.1版

MAX ECHO

Name	Multilayer Chip Inductors	COMPOSITE SPECIFICATION		4 / 8
	PCLS-201209	SPEC#	PCLS2012-SERIES	

7 EQUIPMENT



7-1 IMPEDANCE

Impedance shall be measured with HP – 4286A impedance analyzer or equivalent system

7-2 DC RESISTANCE

DC resistance shall be measured using HP 4338 digital mili – ohm meter with 4 terminal method.

8. MECHANICAL CHARACTERISTICS

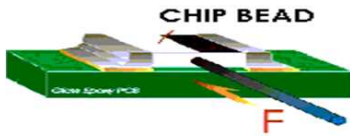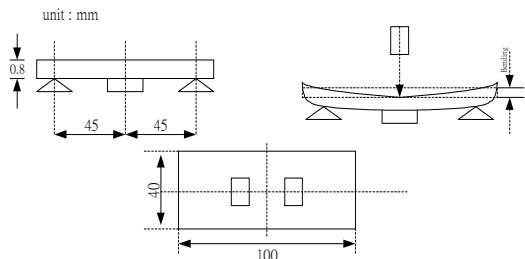ITEM	Specification	TEST CONDITIONS
TERMINAL STRENGTH	Without deformation cases inductance shall be satisfied $\pm 20\%$ DC resistance shall be satisfied.	Solder chip on PCB and applied 10N (1.02Kgf) for 10 sec 
Substrate bending test	Without deformation cases, inductance shall be satisfied $\pm 20\%$ DC resistance shall be satisfied.	After soldering a chip to a test substrate, bend the substrate by 3mm hold for 10s and then return. Soldering shall be done in accordance with the recommended PC board pattern and reflow soldering. 
RESISTANCE TO SOLDER HEAT	No visible damage Electrical characteristics and mechanical characteristics shall be satisfied. Consult standard MIL-STD-202 METHOD 210	Solder Temp. : $265\pm 3^{\circ}\text{C}$ Immersion time : 6 ± 1 sec Preheating : 100°C to 150°C , 1 minute. Measurement to be made after keeping at room temp for 24 ± 2 hrs. Solder : Sn-3Ag-0.5Cu
SOLDER – ABILITY	95% min. coverage of all metallized area Consult standard J-STD-002	Solder temp. : $240\pm 5^{\circ}\text{C}$ Immersion time : 3 ± 1 sec Solder : Sn-3Ag-0.5Cu

Name	Multilayer Chip Inductors PCLS-201209	COMPOSITE SPECIFICATION		5/
		SPEC#	PCLS2012-SERIES	
<p>9. RELIABILITY AND TEST CONDITIONS</p> <p>9-1 HIGH TEMPERATURE RESISTANCE</p> <p>a. Performance specification</p> <p>1.Appearance : no mechanical damage</p> <p>2.Inductance shall be with $\pm 20\%$ of the initial value</p> <p>b.Test condition</p> <p>1.Temperature: $125^{\circ}\text{C} \pm 2^{\circ}\text{C}$</p> <p>2.Testing time : $1000 \pm 12\text{hrs}$</p> <p>3.Measurement : After placing at room ambient temperature for 24 hours minimum</p> <p>9-2 Biased Humidity RESISTANCE</p> <p>a.Performance specification</p> <p>1.Appearance : no mechanical damage</p> <p>2.Inductance shall be with $\pm 20\%$ of the initial value</p> <p>b.Test condition</p> <p>1.Humidity: $85 \pm 5\% \text{RH}$</p> <p>2. Temperature: $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$</p> <p>3.Testing time: 1000 ± 12 hours</p> <p>4.Measurement : After placing at room ambient temperature for 24 hours minimum</p> <p>9-3 TEMPERATURE CYCLE</p> <p>a.Performance specification</p> <p>1.Appearance : no mechanical damage</p> <p>2.Inductance shall be with $\pm 20\%$ of the initial value</p> <p>b.Test condition</p> <p>1. Low Temperature: $-55^{\circ}\text{C} \pm 5^{\circ}\text{C}$ kept stabilized for 30 minutes each</p> <p>2. High Temperature: $125^{\circ}\text{C} \pm 5^{\circ}\text{C}$ kept stabilized for 30 minutes each</p> <p>2.Cycle : 1000 cycles</p> <p>3.Measurement : After placing for 24hours minimum at room ambient temperature</p> <p>4. step1. -55°C temp$\pm 3^{\circ}\text{C}$ 30± 3 minutes step2. Room temperature 2to5 minutes step3. $+125^{\circ}\text{C}$ temp$\pm 3^{\circ}\text{C}$ 30± 3 minutes step4. room temperature 2to5 minutes</p> <p>9-4 VIBRATION TEST</p> <p>a.Performance specification</p> <p>1.Appearance : no mechanical damage</p> <p>2.Inductance shall be with $\pm 20\%$ of the initial value</p> <p>b.Test condition</p> <p>1.Frequency and Amplitude:10-2000-10Hz</p> <p>2.Direction:X,Y,Z.</p> <p>3.Test duration:4 hours for each direction,12hours in total.</p> <p>9-5 Mechanical Shock TEST</p> <p>a.Performance specification</p> <p>1.Appearance : no mechanical damage</p> <p>2.Inductance shall be with $\pm 20\%$ of the initial value</p> <p>b.Test condition</p> <p>1.peak acceleration : 100 g's</p> <p>2.Duration of pulse : 6 ms</p> <p>3.Waveform : Half-sine</p> <p>4.Velocity change : 12.3 ft/sec</p> <p>5. Direction : X , Y , Z (3axes/3 times)</p> <p>9-6 Operational Life</p> <p>a. Performance specification</p> <p>1.Appearance : no mechanical damage</p> <p>2.Inductance shall be with $\pm 20\%$ of the initial value</p> <p>b.Test condition</p> <p>1.Temperature: $125^{\circ}\text{C} \pm 2^{\circ}\text{C}$</p> <p>2.Testing time : $1000 \pm 12\text{hrs}$</p> <p>3.Measurement : After placing at room ambient temperature for 24 hours minimum</p> <p>9-7 Electrostatic discharge test</p> <p>a. Performance specification</p> <p>1.Appearance : no mechanical damage</p> <p>2.Inductance shall be with $\pm 20\%$ of the initial value</p> <p>b.Test condition</p> <p>1.ESD voltage: 15k volts</p> <p>2.Mode 1:150 pF/330 Ohm</p> <p>3.Mode 2:150 pF/2000 Ohm</p> <p>9.1 REMARK</p> <p>The reliability test customers if there are special requirements in accordance with customer needs</p>				

MAX ECHO 鈺鎧科技股份有限公司規格標準書


COMPONENT SPECIFICATION

版次：第3.1版

MAX ECHO


Name	Multilayer Chip Inductors	COMPOSITE SPECIFICATION		6 / 8
	PCLS-201209	SPEC#	PCLS2012-SERIES	

10.PAPER CARRIER TYPE PACKING

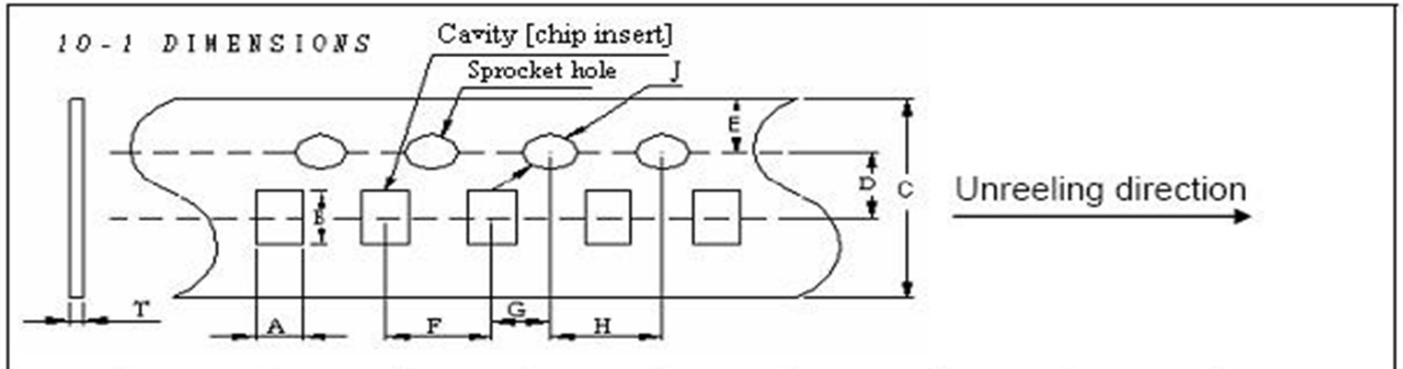

A	B	C	D	E	F	G	H	J	T
1.45	2.25	8.00	3.50	1.75	4.00	2.00	4.00	1.55	0.95
±0.05	±0.05	±0.10	±0.05	±0.10	±0.10	±0.05	±0.10	±0.05	±0.05



10-2 LEADER AND TRAILER TAPE

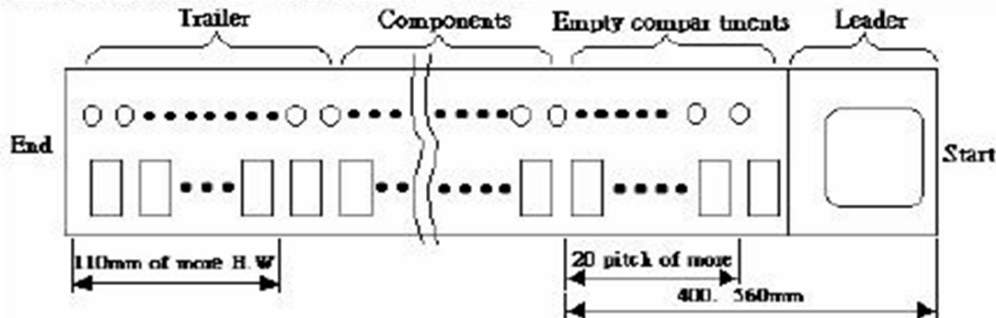

10-3 DIRECTION THE DIRECTION SHALL BE SEEN FROM THE TOP OF COVER TAPE



10-4 REELS

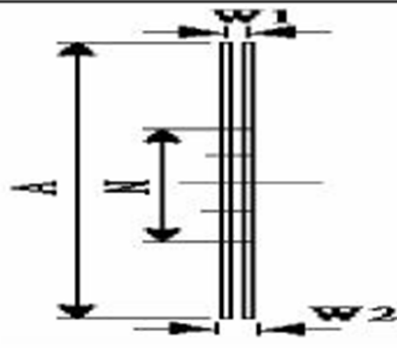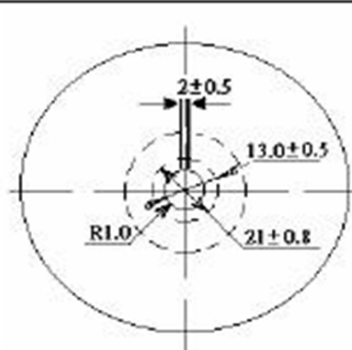

UNIT:mm

A	178 ±2.0
N	50 MIN
W1	10 ±1.5
W2	20 MAX

PACKING QTY.
4,000 PCS REEL

MAX ECHO 鈺鎧科技股份有限公司規格標準書


COMPONENT SPECIFICATION

版次：第3.1版


MAX ECHO

Name	Multilayer Chip Inductors	COMPOSITE SPECIFICATION		7 / 8
	PCLS-201209	SPEC#	PCLS2012-SERIES	

10-5 PEELING STRENGTH OF COVER TAPE



165°~180°

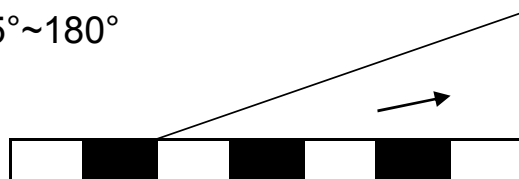

Test condition

- 1) peel angle : 165°~180° vs carrier tape
- 2) peel speed : 300mm/min

11.PACKAGING

- 1) Tape & Reel packaging in composite specification 6/8
- 2) Reel and a bag of desiccant shall be packed in Nylon or plastic bag
- 3) Maximum of 5 reels shall be packaged in a inner box
- 4) Maximum of 6 inner box shall be packaged in a outer box

12.Reel Label

Producing the goods label needs to indicate (1) Pb Free (2) RoHS Compliant

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.1版

MAX ECHO

NAME	Multilayer Chip Inductors	COMPOSITE SPECIFICATION		8 / 8
	PCLS-201209	SPEC#	PCLS2012-SERIES	
<p>13. STORAGE</p> <p>13-1 The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to high humidity. Packages must be stored at 40°C or less and 70% RH or less.</p> <p>13-2 The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to dust or harmful gas (hydrogen chloride, sulfurous acid gas or hydrogen sulfide).</p> <p>13-3 Packaging material may be deformed if packages are stored where they are exposed to heat or direct sun – light.</p> <p>13-4 Minimum packages, such as polyvinyl heat – seal packages shall not be opened until just before they are used. If opened, use the reels as soon as possible.</p> <p>13-5 Solderability specified in composite specification 4/8 shall be for 6 months from the date of delivery on condition that they are stored at the environment specified clause 13-1 & 13-2. For those parts which passed more than 6 months shall be checked solderability before it is used.</p> <p>14. Quality System</p> <ul style="list-style-type: none"> ■ ISO/TS16949 ■ IECQ QC 080000 				