



# UNI-HOME INDUSTRY CORPORATION

No.6, Lane 183, Jhongsing Road, Sijhih, Taipei, Taiwan TEL: 886-2-2694-6628 FAX: 886-2-22694-7277

E-MAIL: [silicone@uni-home.com.tw](mailto:silicone@uni-home.com.tw)


## Thermal Insulator Pads

Specification: TO-220, TO-3P, TO-3, TO-220-BH, TO-3P-BH.

Thickness: 0.23 ~ 0.8mm

	Properties	HC-1000	Unit	Test Method
Physical	Color	Gray	Visual	–
	Reinforcement Layer	Fiberglass	–	–
	Finish	Smooth	Visual	--
	Thickness (Tol. ± 0.02)	0.23~0.8	mm	ASTM D374
	Operating Temperature	-40~+220	°C	–
Mechanical	Specific Gravity	1.60	–	ASTM D792
	Tensile Strength	150	kgf/cm <sup>2</sup>	ASTM D412
	Tear Strength	6.70	%	ASTM D573
	Elongation	7~12	%	ASTM D412
	Hardness	70 ± 5	Shore A	ASTM D2240
Electrical	Voltage Breakdown	3500	V/mm	ASTM D149
	Volume Resistivity	2.0 x 10 <sup>13</sup>	Ω • cm	ASTM D257
Thermal	Thermal Conductivity	0.3	W/m.k	ASTM D5470
Regulatory	Flammability Rating	V-0	–	UL94
	RoHS Compliant	Yes	–	Lab. Certification
	PFOA Compliant	Yes	–	Lab. Certification
	PFOS Compliant	Yes	–	Lab. Certification
	SVHC Compliant	Yes	–	Lab. Certification

\* The above testing result comes from laboratory report, information for your reference only.

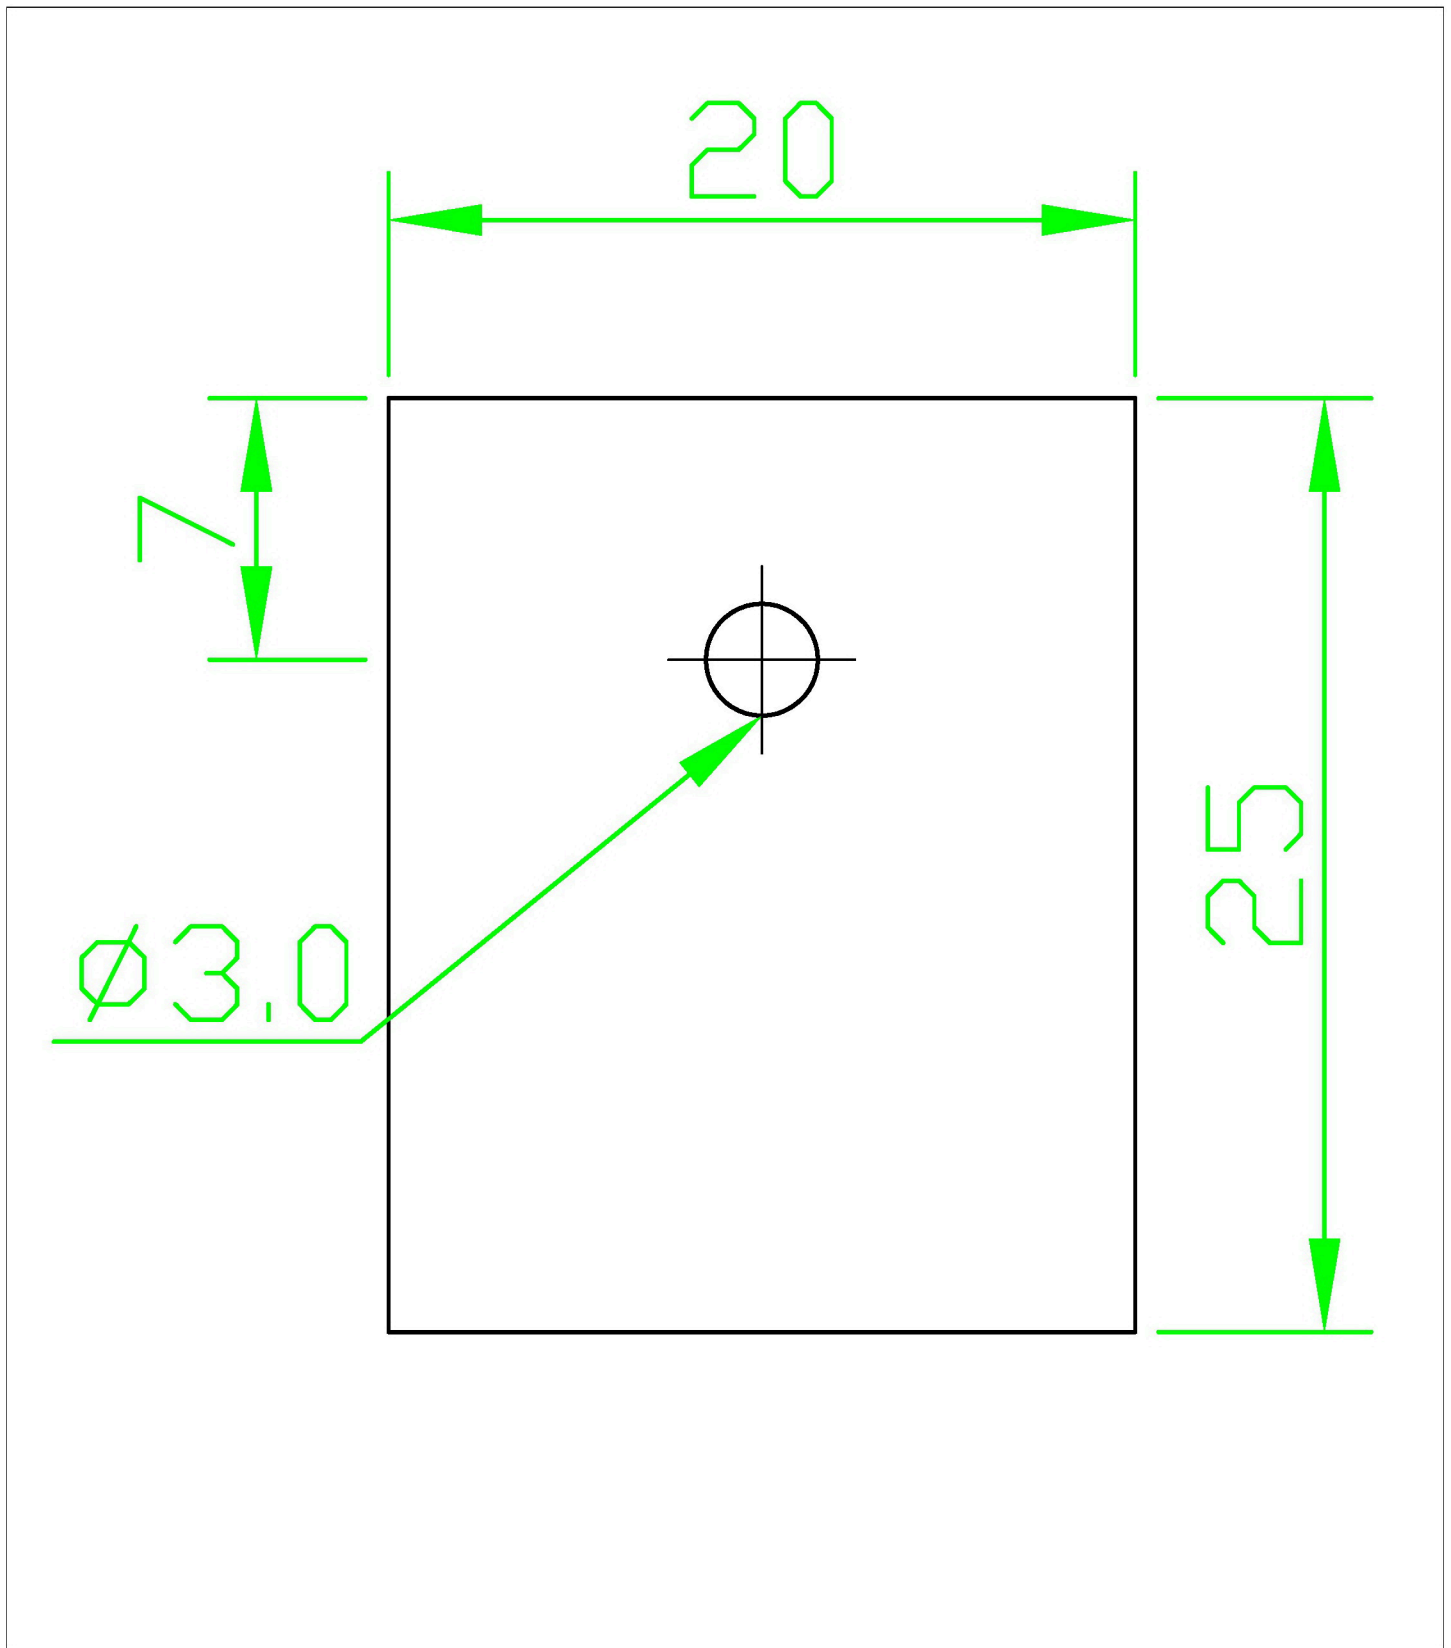

## 佑鴻工業股份有限公司

型號	TO-3P	規格	20X25X0.3t		
品名	砂膠片	日期	98.11.03	尺寸單位	mm