
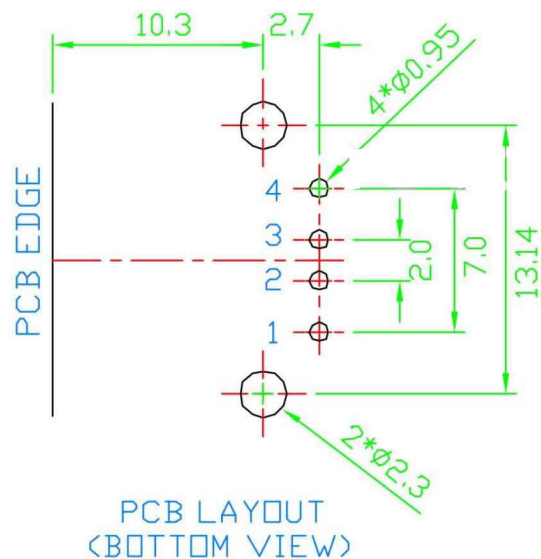
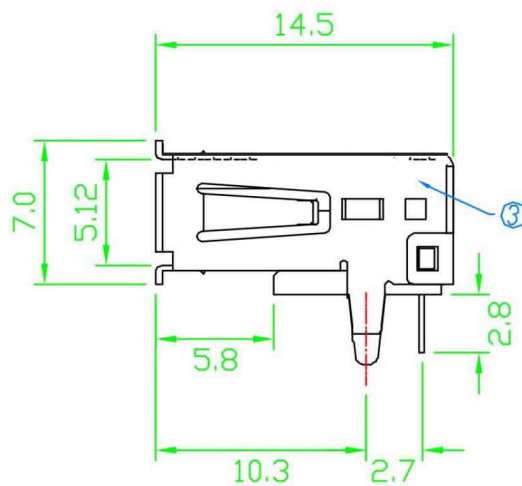


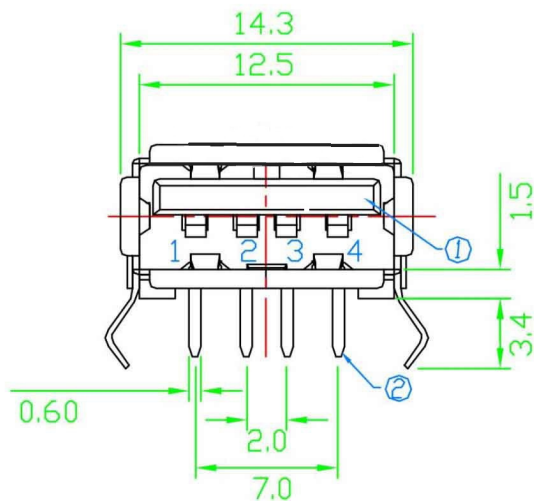

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	NI:80~120u"

RoHS
Compliant

APPD. 核准	BETTY		TOLERANCE	PART NAME 品 名	
DWG. 製 圖	BETTY		SCALE 比 例	X. ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05	USB A FEMALE RIGHT ANGLE
DATE 制表日	2010/09/17	UNIT 單 位	MM	SIZE. 紙張尺寸	A 4
PAGE 張 數	1 OF 1	REV. 版 次	B	PART NO. 料 號	525 SERIES