

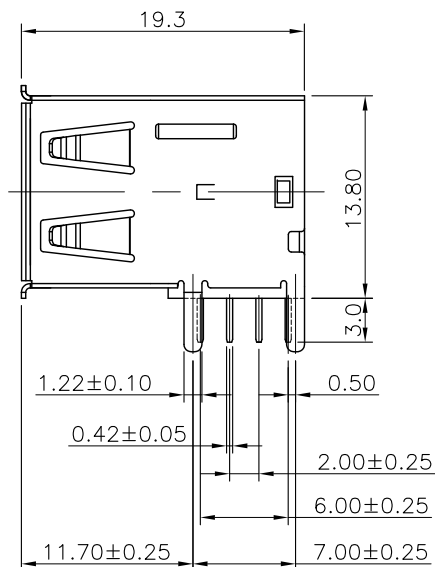




REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A0	N/A	NEW DRAWING	2013.09.28	WOODY

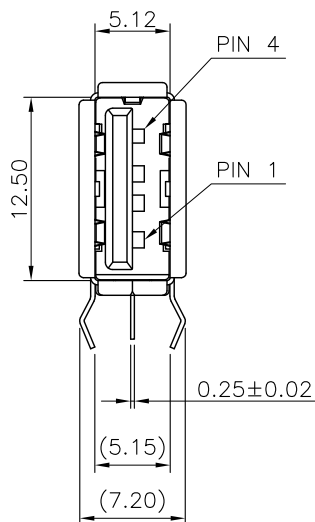

3D VIEW

NOTES:

- MATERIAL:
 - HOUSING: TEMPERATURE PLASTIC, BLACK, UL94V-0;
 - TERMINAL: COPPER AOLLY, T=0.25±0.02mm;
 - SHELL&COVER: SPCC, T=0.30±0.02mm;
- FINISH:
 - TERMINAL:
CONTACT AREA:GOLD 0.025μm (1u") PLATED;
TAILS:TIN PLATED OVER NICKEL;
 - SHELL&COVER:NICKEL PLATED OVER ALL;
- RECOMMENDED PCB THICKNESS: 1.60mm;
- ELECTRICAL:
 - VOLTAGE RATING: 30 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.;
 - INSULATION RESISTANCE:1000 MEGOHMS MIN, 500VDC.;
 - WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1min.;
- MECHANICAL:
 - MATING FORCE: 35N MAX.;
 - UNMATING FORCE: 5N MIN.;
 - OPERATING LIFE: 1500 CYCLES MIN.;
- ENVIRONMENTAL:
 - STORAGE: -10°C~+40°C, RELATIVE HUMIDITY<80%;
 - OPERATION: -40°C~+85°C.

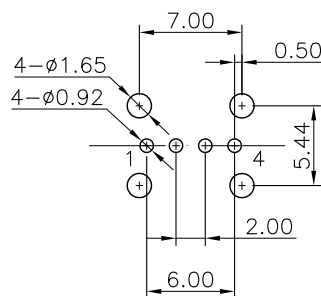

RECOMMENDED PCB LAYOUT
TOP VIEW(TOL:±0.05)

UNIT® 深圳市鸿宇特电子有限公司
SHENZHEN UNIT ELECTRONICS CO., LTD

UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30 X. ±0.35 ANGULAR: X.xx ±1° X.x ±3° X. ±5°		NAME: USB AF 90° SIDE DIP 客户图		P/N: 801-15001-004	
		THIRD ANGLE PROJECTION 		DWG NO.: DWG-CST-0531	
DRAWN:		UNIT:	SCALE:	SIZE:	SHEET:
		mm	1:1	A4	1/1
		CHECKED:	APPROVED:		
		REV.:			
		A0			