

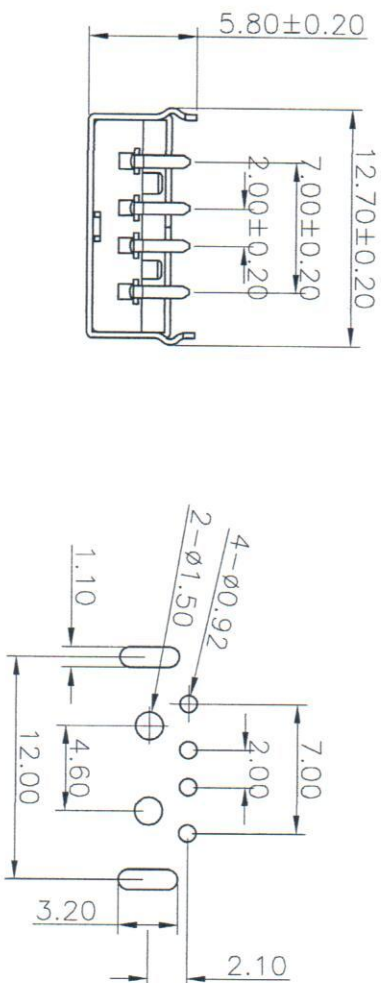


RoHS Compliant

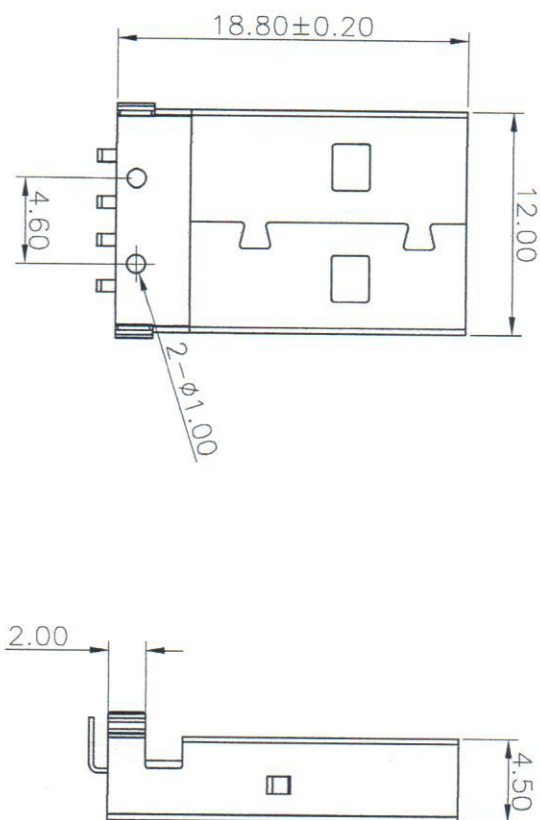

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT

- 1.MATERIAL:
INSULATOR:PBT UL 94V-0
CONTACT:BRASS H65,T=0.25MM
SHELL:SPCC,T=0.30MM
- 2.MECHANICAL:
MATING:35N MAX.
WITHDRAWAL FORCE:10N MIN.
DURABILITY:1500 CYCLES MIN.
- 3.ELECTRICAL:
CURRENT-MAX[AMPS]:1.5A
VOLTAGE-MAX[VOLTS]:30V
WITHSTANDING VOLTAGE: 500V AC.
CONTACT RESISTANCE [OHMS]:30mΩMAX.
INSULATION RESISTANCE [OHMS]:1000MΩMIN.
- 4.PLATING:
CONTACTS:GOLD AND TIN OVER NICKEL PLATED
SHELL:NICKEL OVER ALL PLATING
- 5.ENVIRONMENTAL:
TEMPERATURE RANGE:-55℃ TO +85℃

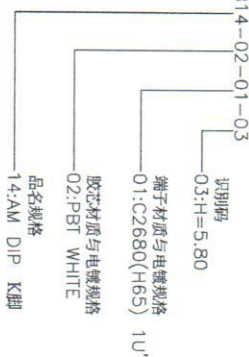

6

REV	ECN NO.	DESCRIPTION	DATE	ENGINEER

3	TERMINAL	4	BRASS H65 T=0.25	AU GF
2	SHELL	1	SPCC T=0.30	NI 50U"MIN
1	HOUSING	1	PBT UL94V-0	
ITEM	PART NAME	QTY	MATERIAL	PLATING
TOLERANCING METRIC X.XXX=±0.05 X.XX =±0.10 X.X =±0.15 X. =±0.25 ANG: X.XX=1° ANG: X.X=2° ANG: X.=3°				
QUALITY SYMBOLS CRITICAL=Ⓢ MAJOR=Ⓢ				
THIRD ANGLE PROJECTION				
DRAWN: LSB				
CHECKED: WOODY				
APPROVED: ZUY				
MATERIAL: SEE NOTE				

UNIT SHENZHEN UNIT ELECTRONICS CO., LTD
深圳市鸿宇特电子有限公司

NAME: USB AM DIP

DWG NO.: DWG-F-564

P/N: USB14-02-01-03

SCALE: 1:1

UNIT

mm

REV.

DATE

2009-03-03

APPROVED:

ZUY