


# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠

BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)

## EQUIVALENT CIRCUIT DIAGRAM 同等電路圖



•No directionality 無方向性



## Electrical characteristics 電氣特性

Part Number 產品料號	Impedance 阻值(歐姆) ( $\Omega$ ) $\pm$ 25% [100MHz]	DC Resistance 直流阻抗 $\Omega$ (MAX) (歐姆)	Rated Current mA (MAX) 耐電流
<b>2012 系列</b>			
BCMS201209A070	7	0.008	6000
BCMS201209A110	11	0.008	6000
BCMS201209A170	17	0.008	6000
BCMS201209A300	30	0.008	6000
BCMS201209A390RDC008	39	0.008	6000
BCMS201209A600	60	0.020	6000
BCMS201209A800	80	0.020	6000
BCMS201209A121	120	0.025	6000
<b>3216 系列</b>			
BCMS321611A310	31	0.006	6000
BCMS321611A520	52	0.020	6000
BCMS321611A800 4A	80	0.030	4000
BCMS321611A121 5A	120	0.025	5000
<b>3225 系列</b>			
BCMS322513A520	52	0.020	6000
BCMS322513A600	60	0.020	6000
<b>4516 系列</b>			
BCMS451616A600	60	0.020	6000
BCMS451616A750 8A	75	0.010	8000
BCMS451616A101	100	0.020	6000
BCMS451616A121	120	0.020	6000
<b>4532 系列</b>			
BCMS453215A600	60	0.020	6000
BCMS453215A121	120	0.020	6000
BCMS453215A151	150	0.020	6000
BCMS453215B700	70	0.020	6000

TEST EQUIPMENT: HP-4291A IMPEDANCE ANALYZER 測試設備: HP-4291A 阻值分析儀

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
鈺鎧保留更改此目錄中任何內容之權利. 而不再另行通知.

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


BCMS201209A070

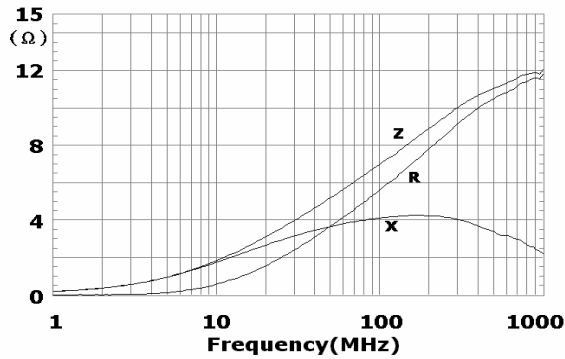


BCMS201209A110

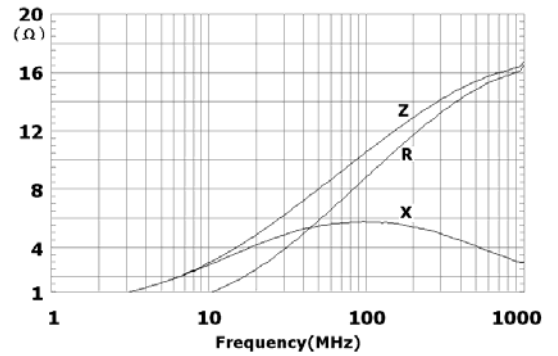


BCMS201209A170

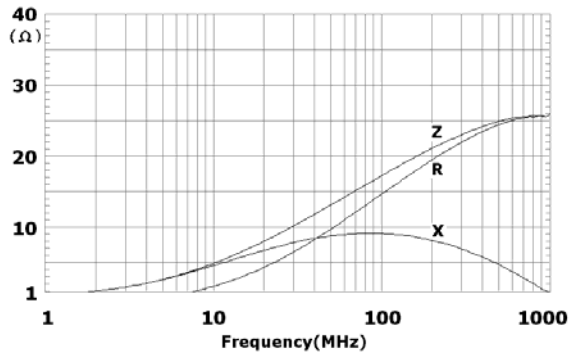


BCMS201209A300

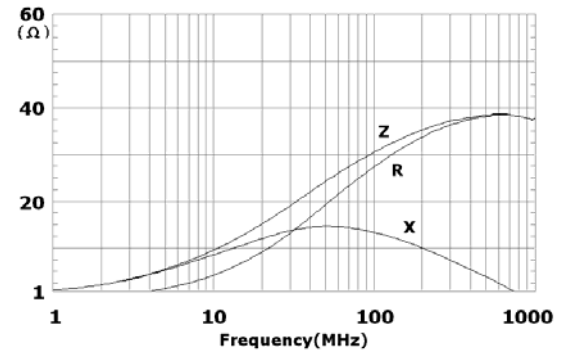


BCMS201209A390RDC008

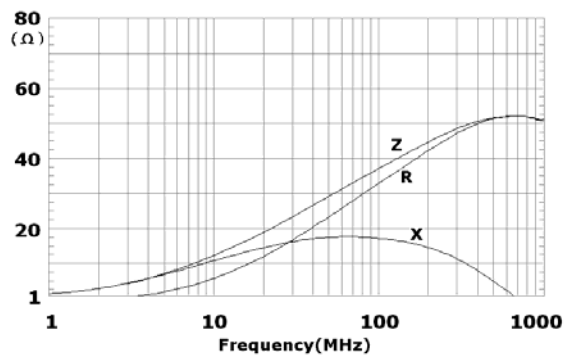


BCMS201209A600

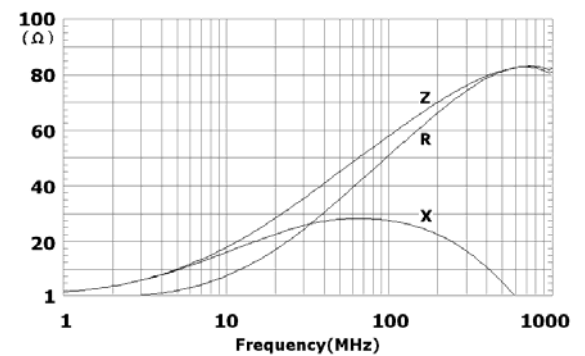

BCMS201209A800

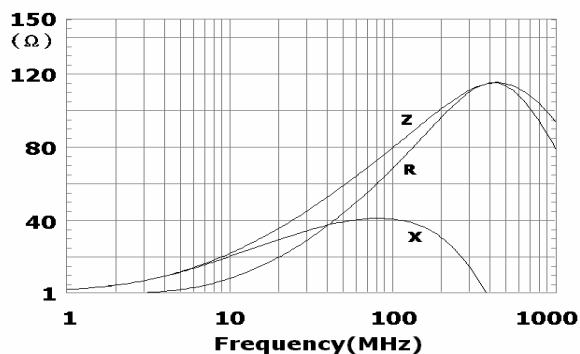

BCMS201209A121

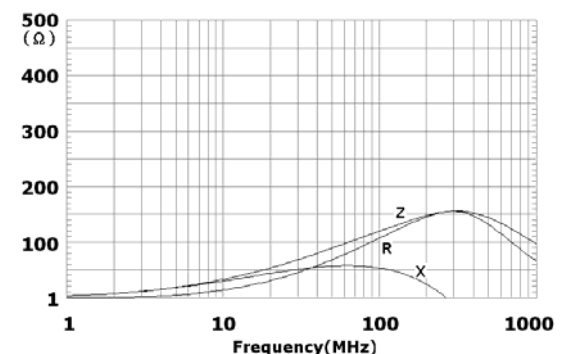

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
 鈺鎧保留更改此目錄中任何內容之權利。而不再另行通知。

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X vs. 頻率特性


BCMS321611A310

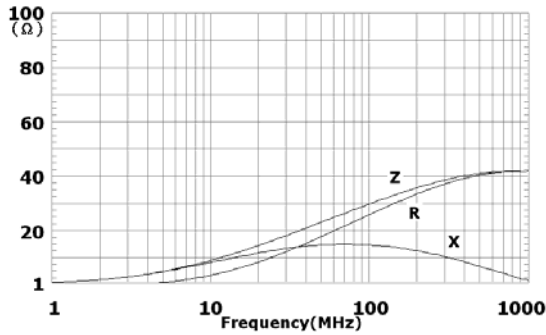


BCMS321611A520

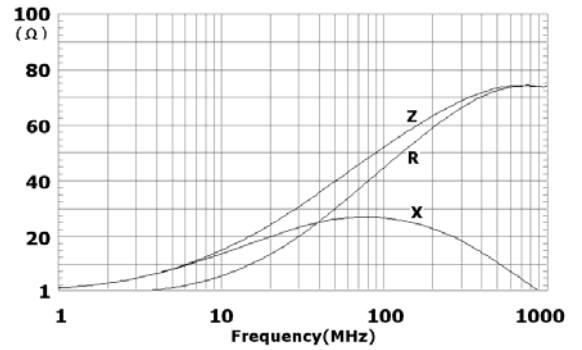


BCMS321611A800 4A

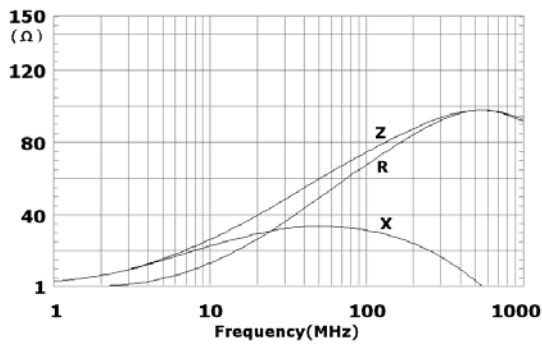


BCMS321611A121 5A

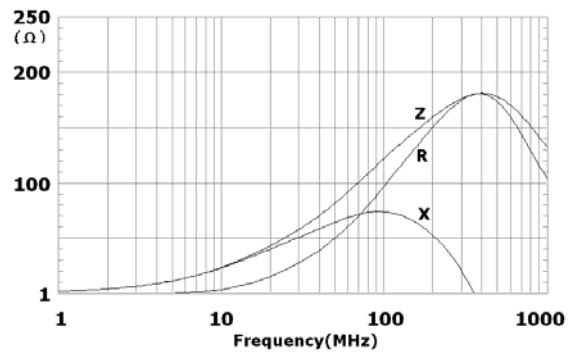


BCMS322513A520

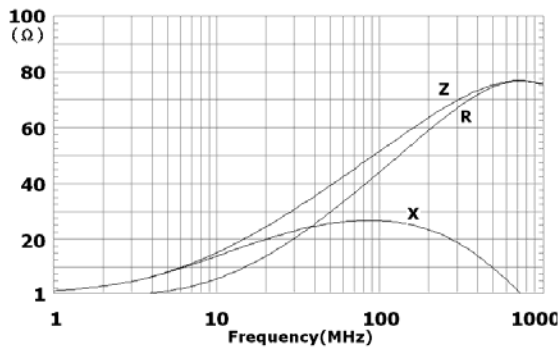


BCMS322513A600

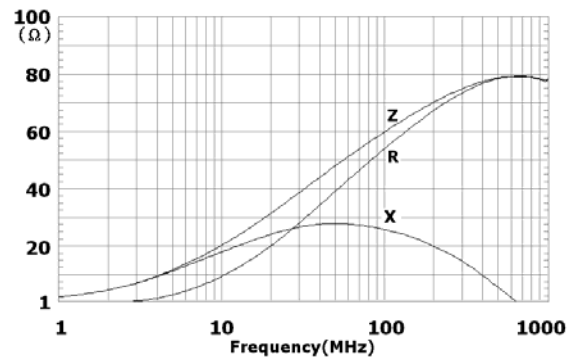

BCMS451616A600

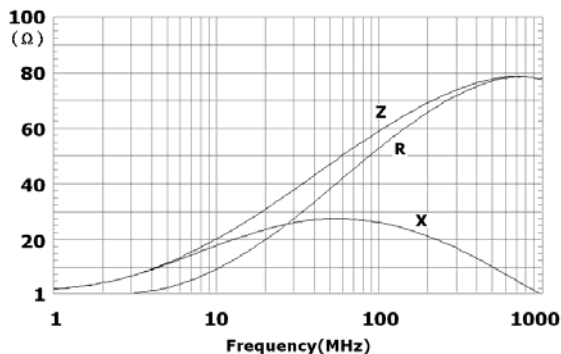

BCMS451616A750 8A

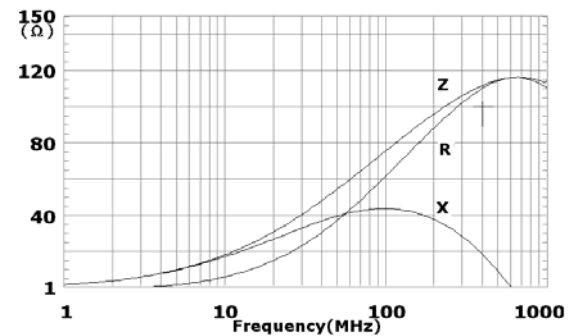

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
 鈺鎧保留更改此目錄中任何內容之權利。而不再另行通知。

# MULTILAYER CHIP SUPPRESSORS (CHIP BEADS) 積層式晶片磁珠


BCMS series for DC power line (BCMS 系列適用於直流電源信號線)

Rated Current(耐電流): 4-6A(安培)


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS. 頻率特性


BCMS454616A101

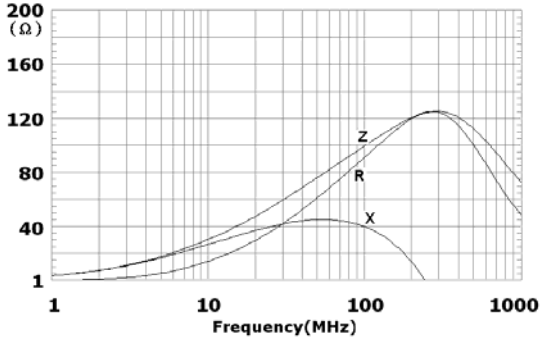


BCMS451616A121

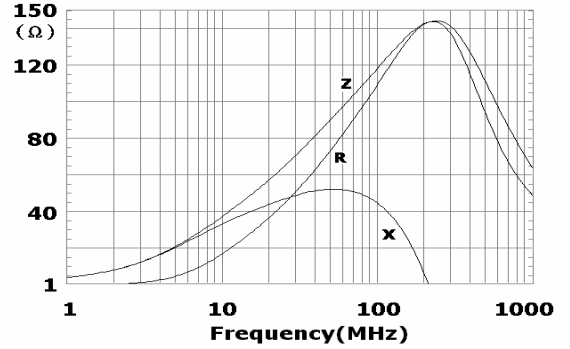


BCMS453215A600

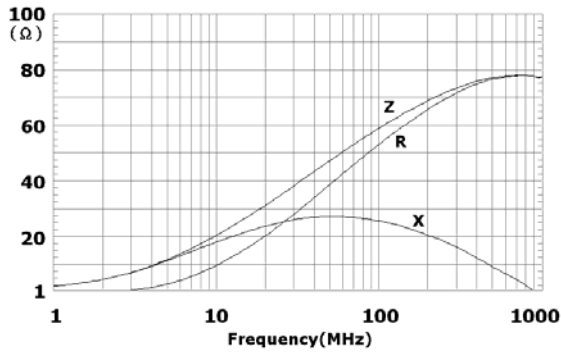


BCMS453215A121

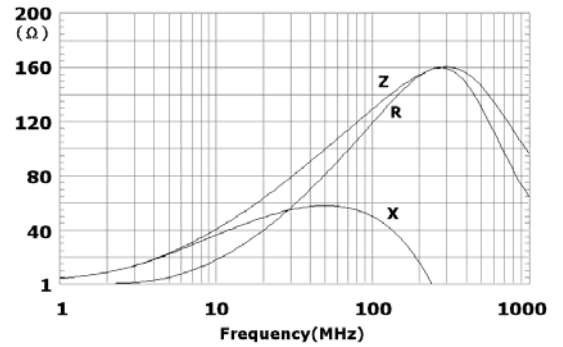

BCMS453215A151

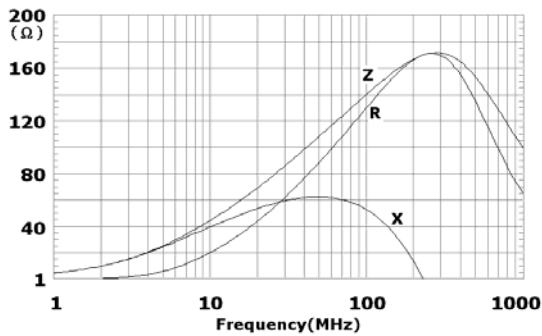

BCMS453215B700

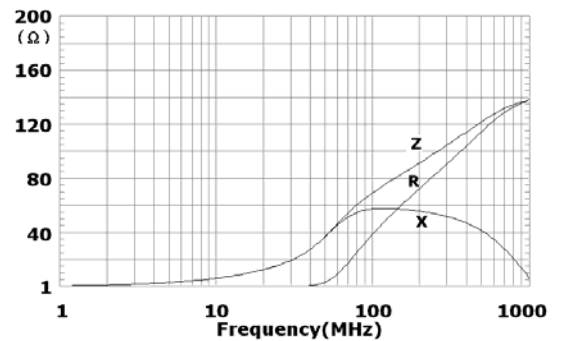

\* Max Echo reserves the rights for revising the content of this catalog without further notification.  
 鈺鎧保留更改此目錄中任何內容之權利. 而不再另行通知.