


# Multilayer Ferrite Chip Bead (for Signal Line)

積層式鐵氧體晶片磁珠（訊號線用）

EBMS060303 (0201) TYPE 類型

EQUIVALENT CIRCUIT DIAGRAM 等效電路圖



## Electrical Characteristics 電氣特性

Part Number 產品料號	Impedance 阻抗 $\Omega \pm 25\%$ 歐姆 @ 100MHz	DC Resistance 直流電阻 $\Omega$ (Max.) 歐姆	Rated Current mA (Max.) 耐電流
EBMS060303A400	40	0.3	300
EBMS060303A500	50	0.3	300
EBMS060303A600	60	0.35	300
EBMS060303A700	70	0.35	300
EBMS060303A121	120	0.45	200
EBMS060303A151	150	0.50	200
EBMS060303A221	220	0.75	200
EBMS060303A301	300	0.90	150

\* TEST EQUIPMENT: E4991A IMPEDANCE ANALYZER

量測儀器：E4991A 阻抗分析儀

# Multilayer Ferrite Chip Bead (for Signal Line)


## 積層式鐵氧體晶片磁珠（訊號線用）

### EBMS060303 (0201) TYPE 類型


TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z, R, X vs. FREQUENCY CHARACTERISTICS 阻抗、電阻、感抗對頻率特性


EBMS060303A400

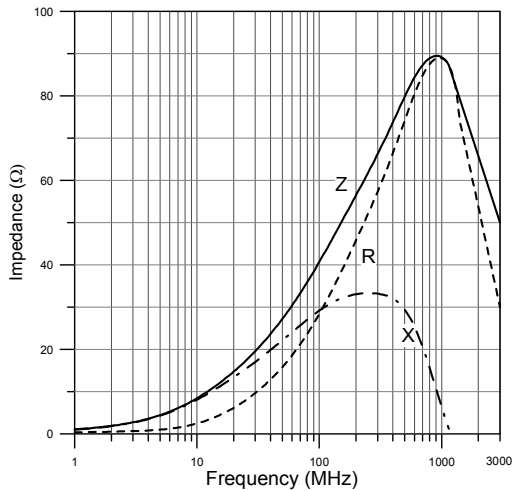


EBMS060303A500

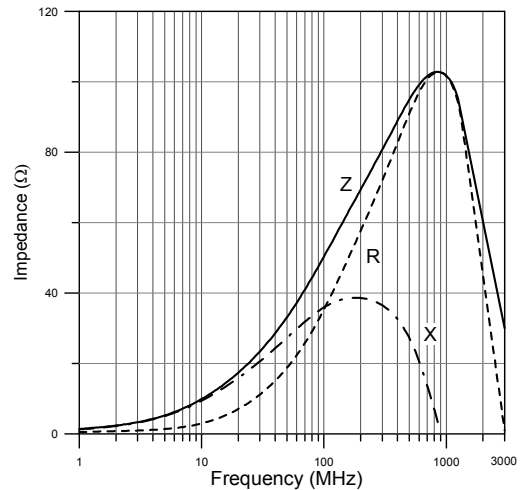

EBMS060303A600

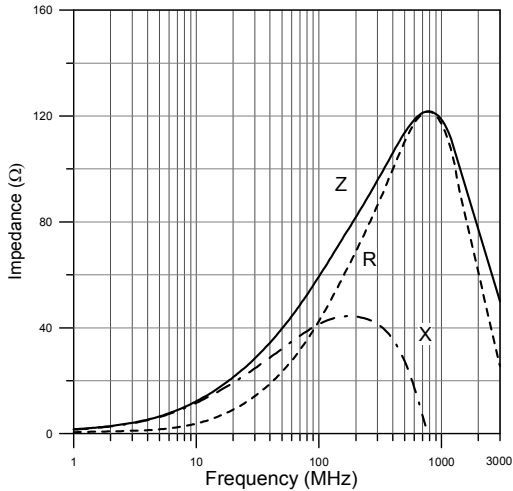

EBMS060303A700

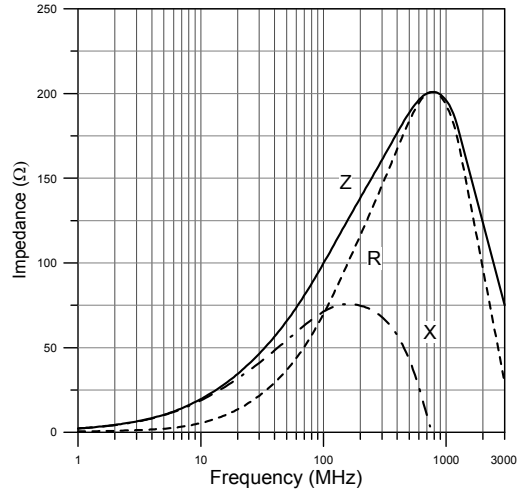

# Multilayer Ferrite Chip Bead (for Signal Line)

積層式鐵氧體晶片磁珠（訊號線用）

EBMS060303 (0201) TYPE 類型

TYPICAL ELECTRICAL CHARACTERISTICS 典型電氣特性

Z, R, X vs. FREQUENCY CHARACTERISTICS 阻抗、電阻、感抗對頻率特性

